

**Placer County Water Agency
Middle Fork American River Hydroelectric Project**
(FERC No. 2079)

**2005 - 2006
Existing Environment
Study Plan Package**



Placer County Water Agency
P.O. Box 6570
Auburn, CA 95604

June 17, 2005

TABLE OF CONTENTS

	Page
1.0 Introduction	1-1
2.0 Resource Agency Interaction Schedule	2-1
3.0 Physical Habitat Characterization Study Plan	3-1
3.1 Introduction.....	3-1
3.2 Geographic Setting.....	3-4
3.3 Geomorphology Study Plan.....	3-5
3.3.1 Study Objectives	3-5
3.3.2 General Approach	3-5
3.3.3 Phase 1 Study Methodology.....	3-6
3.3.4 Phase 2 Study Methodology.....	3-9
3.3.5 Quality Assurance/Quality Control.....	3-11
3.3.6 Reporting.....	3-11
3.3.7 Schedule Milestones	3-12
3.4 Riparian Habitat Mapping Study Plan.....	3-13
3.4.1 Study Objective	3-13
3.4.2 General Approach	3-13
3.4.3 Phase 1 Study Methodology.....	3-14
3.4.4 Phase 2 Study Methodology.....	3-16
3.4.5 Quality Assurance/Quality Control Procedures	3-17
3.4.6 Reporting.....	3-17
3.4.7 Schedule Milestones	3-18
3.5 Aquatic Habitat Characterization Study Plan	3-18
3.5.1 Study Objectives	3-18
3.5.2 General Approach	3-18
3.5.3 Study Methodology.....	3-19
3.5.4 Quality Control Procedures	3-26
3.5.5 Reporting.....	3-26
3.5.6 Schedule Milestones	3-27
3.6 References	3-27

4.0 Water Temperature Study Plan.....	4-1
4.1 Introduction.....	4-1
4.2 Study Objectives.....	4-2
4.3 General Approach	4-2
4.4 Study Methods.....	4-2
4.4.1 Stream Water Temperature Monitoring	4-2
4.4.2 Reservoir Water Temperature Profiling	4-13
4.4.3 Meteorological Data	4-16
4.5 Reporting	4-20
4.6 Schedule Milestones	4-20
4.7 References	4-22
5.0 Hydrology Study Plan.....	5-1
5.1 Introduction.....	5-1
5.2 Study Objectives.....	5-1
5.3 General Approach	5-1
5.4 Study Methods.....	5-2
5.4.1 Collecting and Compiling Existing Stream Flow and Storage Data	5-2
5.4.2 Augmenting the Existing Hydrologic Data Set.....	5-7
5.4.3 Data Quality Assurance/Quality Control	5-11
5.4.4 Developing Unimpaired Flows.....	5-8
5.4.5 Unimpaired Flow Data from SMUD	5-9
5.5 Data Analysis.....	5-10
5.5.1 IHA Analysis	5-10
5.6 Reporting	5-11
5.7 Schedule Milestones	5-12
5.8 References	5-12

LIST OF FIGURES

	Page
Figure 1-1. Principle Project Facilities and Geographic Setting	1-2
Figure 2-1. Existing Environment Study Plan Schedule (2005-2006).	2-3
Figure 3-1. Integration of Physical Habitat Characterization Studies (2005-2006).	3-2
Figure 3-2. Example of Woody Debris Inventory Data Sheet from USFS R-5 (1996) Stream Condition Inventory.....	3-25
Figure 4-1. MFP Water Temperature Monitoring Station Array (including existing and proposed stations).....	4-4
Figure 4-2. Location of Current and Proposed Meteorological Monitoring Stations ...	4-18
Figure 5-1. Gage Station Locations.....	5-5

LIST OF TABLES

	Page
Table 3-1. Hawkins <i>et al.</i> (1993) Level I and Level II Habitat Classifications.....	3-20
Table 3-2. Habitat Types and Codes Adapted from McCain <i>et al.</i> (1990).....	3-21
Table 3-3. Description of Spawning Gravel Quality.....	3-23
Table 4-1. Current And Proposed Water Temperature Monitoring Locations Associated with the MFP, and their Operational Status and Proposed Download Frequency.....	4-5
Table 4-2. Current and Proposed Reservoir Profile Locations Associated with the MFP, and the Proposed Parameters Measured and Sampling Frequency.	4-14
Table 4-3. Existing Air Temperature/Relative Humidity Stations that will be Replaced by New, Upgraded Meteorological Sites.....	4-17
Table 4-4. Current and Proposed Meteorological Monitoring Locations Associated with the MFP, and their Installation Dates, Status, and Proposed Download Frequencies.....	4-19
Table 5-1. USGS Gaging Stations (Middle- and North-Fork American Rivers).	5-3

Appendices

- Appendix A. Project Description Placer County Water Agency Middle Fork American River Hydroelectric Project (FERC Project No. 2079)
- Appendix B. Summary of Stream and Reservoir Water Temperature Pilot Program
- Appendix C. Map Showing the Location of Flow Gages, Temperature Monitoring Stations and Hydrologic Modeling Nodes

Glossary and Acronyms

Afterbay – An impounded water body receiving the discharge of a powerhouse.

Cfs – A measure of flow; cubic feet per second.

CDEC – California Data Exchange Center

DPR – California State Department of Parks and Recreation

DWR – Department of Water Resources

EPA – Environmental Protection Agency

FERC – Federal Energy Regulatory Commission, which issued an operating license for the Middle Fork American River Hydroelectric Project.

FERC Project Boundary – The boundary surrounding the MFP facilities as delineated in the MFP license issued by the FERC in 1963.

FPUD – Foresthill Public Utility District

Forebay – An impounded water body that provides water to a powerhouse usually via a tunnel or penstock.

GPS – Global Positioning System

GPUD – Georgetown Public Utility District

IHA – Indicators of Hydraulic Alteration – A method for evaluating and calculating up to 32 hydrologic parameters, which are used to compare the degree of hydrologic alteration on the magnitude, timing, frequency, duration, and rate of change in a system using biologically relevant variables.

ILP – Integrated Licensing Process – A new FERC process for conducting a relicensing program and the FERC's default relicensing process effective July 23, 2005. The ILP provides for increased public participation during pre-filing consultation, development of FERC-approved study plans, better coordination between the FERC and other agency processes, and encourages informal resolution of study disagreements. PCWA has chosen the ILP mainly because it emphasizes early collaboration with the stakeholders, a feature PCWA believes is important.

Logger – A devise used to record data.

MET Station – A station that measures specific meteorological parameters such as wind speed, wind direction, solar radiation, precipitation and air temperature.

MFP – Middle Fork American River Hydroelectric Project, FERC Project No. 2079.

Montgomery-Buffington Classification – A classification system used to organize stream morphology into seven reach types based on distinctive bed morphology.

NOI – Notice of Intent

PAD – Pre-application Document. A document that is required as part of the ILP, which PCWA will file with the FERC and distribute to the resource agencies and other stakeholders in September 2007. As required in the FERC regulations, the PAD will include: 1) a description of the existing and proposed (if any) Project facilities and operations; 2) information on the existing environment; 3) existing data or studies relevant to the existing environment, and; any known and potential impacts of the proposed project on the specified resources. PCWA also plans to include agency and stakeholder-approved technical study plans in the PAD.

PCWA – Placer County Water Agency

Preliminary Activities – Activities to be performed by PCWA, in consultation with the resource agencies, prior to filing the NOI and PAD.

Pre-Project – The period prior to construction of the MFP.

Post-Project – The period after completion of construction of the MFP

Project – The Middle Fork American River Hydroelectric Project, FERC Project No. 2079

Project Area – The general geographic area within which the Project occurs – generally the Middle Fork American River from below the Oxbow Powerhouse, upstream to above the French Meadows Reservoir, the Rubicon River from its confluence with the Middle Fork American River upstream to the Hell Hole Reservoir and the Duncan Creek and Long Canyon Creek drainages.

Project Facilities – Those facilities contained within the FERC Project Boundary and identified in the FERC license.

Relicensing Program – Activities conducted by PCWA in conformance with FERC licensing requirements to obtain a new FERC license for the Project in 2013.

Resource Agencies – State and federal governmental agencies with a mandatory or discretionary interest in the relicensing of the MFP.

Rosgen Classification – A classification system that uses five primary parameters to describe the morphology of a stream or river channel: gradient, sinuosity, width/depth ratio, bed material size, and degree of confinement.

Stream Reach – A specified stream or river segment.

SMUD – Sacramento Municipal Utility District

Technical Studies – Comprehensive technical studies that will be designed and developed as part of a multi-stakeholder collaborative effort in 2006 and 2007 and implemented in 2008 and 2009.

Technical Study Area – A geographic area investigated with respect to a particular question or scientific issue. May be within or extend beyond the Project Area.

Thalweg – The line defining the lowest points along the length of a riverbed or valley.

USBR – United States Bureau of Reclamation

USFS – United States Forest Service

USGS – United States Geological Survey

1.0 INTRODUCTION

The Placer County Water Agency (PCWA) owns the Middle Fork American River Hydroelectric Project (MFP or Project), located on the Middle Fork American River, the Rubicon River, and several tributaries in Placer and El Dorado Counties, California. The MFP is a multipurpose project that was designed to supply water for recreation, irrigation, domestic and commercial purposes, and to generate hydroelectric power. The principle Project features are shown on Figure 1-1 and include two primary storage reservoirs, five smaller impoundments, five powerhouses, and water conveyance facilities. An introductory level description of the MFP and its operation is included in Appendix A, for reference. PCWA is currently developing a summary table of Project features and specifications and a comprehensive Project description. The summary table will be provided to the resource agencies in early summer 2005. The comprehensive Project description will be provided the resource agencies as individual sections are completed, beginning in fall 2005.

PCWA operates the MFP under the terms of the Federal Energy Regulatory Commission (FERC), License No. 2079. The current license will expire on February 28, 2013, and PCWA will be seeking a new license for the MFP pursuant to the FERC's Integrated Licensing Process (ILP) regulations. PCWA plans to file a Notice of Intent (NOI) to relicense the MFP with FERC in September 2007. A Pre-Application Document (PAD) will accompany the NOI per FERC regulations. Among other things, the PAD will include the comprehensive Project description referred to above and a description of the existing environmental resources in the vicinity of the MFP.

To augment resource information currently available, PCWA is planning to implement five environmental studies in 2005- 2006 to collect additional information to enhance the description of environmental resources in the PAD. The Existing Environment Studies will focus on five resource areas: channel geomorphology, riparian habitat, aquatic habitat, water temperature, and hydrology.

The purpose of these Existing Environmental Studies is to develop information early in the process that will assist in the development of future, more comprehensive technical studies necessary to evaluate Project effects and develop appropriate protection, mitigation and enhancement measures for the MFP. PCWA plans to consult a broad group of stakeholders (including agencies, Native American tribes, non-governmental organizations and the local community) in 2006-2007 to collaboratively develop comprehensive technical study plans for the MFP. These collaboratively developed comprehensive study plans will be included in the PAD and implemented by PCWA in 2007-2009.

The Existing Environment Studies will center on the primary reservoirs, streams, rivers, and Project facilities in the vicinity of the MFP. These include: Hell Hole and French Meadows Reservoirs, Duncan Creek Diversion, North Fork Long Canyon and South Fork Long Canyon Diversions, Middle Fork Interbay, Ralston Afterbay, the Rubicon River, the Middle Fork American River, Duncan Canyon Creek and the North and South Forks of Long Canyon Creek. The principle Project features and geographic setting are

Placeholder for Figure 1-1

Figure 1-1 Principal Project Facilities & Geographic Setting

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

depicted on Figure 1-1, which also shows topography and tributary streams, as requested by the resource agencies.

The remainder of this package includes a resource agency interaction schedule followed by individual study plans, which address the five topics identified above, organized as follows:

- Physical Habitat Characterization Study Plan
 - Geomorphology Study Plan
 - Riparian Habitat Mapping Study Plan
 - Aquatic Habitat Characterization Study Plan
- Water Temperature Study Plan
- Hydrology Study Plan

In general, the geomorphology, riparian and aquatic habitat mapping study plans focus on characterizing the geomorphic conditions and riparian and aquatic habitat associated with the streams and rivers in the vicinity of the MFP, using established methodologies. The Water Temperature Study Plan describes how PCWA will collect and compile existing water temperature information, meteorological information, and profile Project reservoirs. The Hydrology Study Plan describes how PCWA will collect and compile existing hydrology information, and how that information can be utilized to perform basic statistical analyses to support the other existing environmental studies described in this package.

PCWA recognizes that additional information on these topics may be needed to augment the information developed as part of the early studies. PCWA intends to consult with the resource agencies and other stakeholders regarding additional studies that may need to be conducted during the formal relicensing process.

2.0 RESOURCE AGENCY INTERACTION SCHEDULE

This Existing Environment Study Plan was developed in coordination with the resource agencies through a process that included both written correspondence and meetings, as summarized in the following.

- PCWA developed a Proposed Existing Environment Study Plan Package (Study Plan Package), which summarized the study objectives and described how the individual studies will be carried out. The draft Study Plan Package was distributed to the resource agencies on January 28, 2005 for review and comment.
- The resource agencies reviewed the draft Study Plan Package and provided PCWA with draft comments on the individual study plans by e-mail dated March 15, 2005.
- PCWA's technical specialists reviewed the resource agencies draft comments and prepared draft responses, which were provided to the resource agencies by e-mail dated April 5, 2005.
- PCWA held a joint resource agency meeting on April 15, 2005 to discuss the study plans and to obtain clarification on some of the resource agency recommended changes to the study plans. This meeting was attended by representatives from PCWA, the US Forest Service (USFS) Eldorado and Tahoe National Forests, the State Water Resources Control Board (SWRCB), California Department of Fish and Game (CDFG), the U.S. Fish and Wildlife Service (USFWS), and California State Parks- Auburn Recreation Area.
- PCWA held two additional meetings on May 6 and 27, 2005. These meetings were attended by a smaller group of resource agency representatives and focused specifically on the water temperature and hydrology study plans.
- PCWA revised the Response to Comment (RTC) table to show agreement on all of the agency comments as discussed during the meetings. The final RTC table was provided to the resource agencies by e-mail on June 9, 2005.

All of the agency recommended changes to the study plans have been incorporated into this final Existing Environment Study Plan Package as discussed and agreed to during the meetings.

As the studies proceed, PCWA anticipates meeting with the resource agencies periodically to discuss progress, issues, concerns and preliminary results. In addition, as agreed to during the meetings, PCWA will continue to consult with the resource agencies regarding all critical study decisions.

PCWA will prepare reports summarizing the 2005 study results, which will be provided to the resource agencies in January 2006. Subsequent data collection efforts will be

modified based on the 2005 study results and agency input. The results of studies conducted during 2006 will be documented in summary reports, which will be provided to the resource agencies in January 2007. All study results will be provided in raw form and data files will be provided in Excel or other appropriate formats, as requested by the resource agencies.

Specific information about schedule, including important field survey and reporting milestones, is included at the end of each of the individual study plans. In addition, the study plan development schedule and major milestones are illustrated in Figure 2-1. PCWA understands the importance of working with the resource agencies as the studies proceed. Accordingly, PCWA will keep the resource agencies apprised of all major field activities and will provide the resource agencies with periodic schedule updates, as needed.

Figure 2-1. Existing Environment Study Plan Schedule-2005

	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Resource Agency Interaction	Distribute Draft Study Plan Package (1/28/05)			Conduct joint agency meeting (4/15/05)	Conduct joint agency sub group meetings focusing on hydrology and temperature (5/6 and 27/05)	Distribute Final Study Plan Package (6/17/05)		Meet with agencies regarding hydrology data (Aug 2005)				
Geomorphology Study					Collect and review existing data, reports, maps, and aerial photography. (Jun-Jul 2005)		Helicopter survey (Jul 2005)	Channel classification ground surveys for Rosgen Level I and Montgomery-Buffington. (Aug-Sep 2005)		Data reduction. (Sep-Nov 2005)		Report preparation. (Nov-Dec 2005)
Riparian Habitat Study					Collect and review existing data, reports, maps, and aerial photography and aerial photograph interpretation. (Jun-Jul 2005)		Helicopter survey. (Jul 2005)	Ground reconnaissance survey of riparian habitat. (Aug-Sep 2005)		Data reduction/analysis. (Sep-Nov 2005)		Report preparation. (Nov-Dec 2005)
Stream Habitat Characterization					Collect and review existing data, reports, maps, and aerial imagery. (Jun-Jul 2005)		Initial visual classification and aerial aquatic habitat assessment. (Aug-Sep 2005)			Refine initial habitat characterization and stratification. (Sep-Dec 2005)		
Water Temperature Study	Stream Water Temperature Monitoring Program				Install redundant and missing water temperature loggers; begin spring download of all water temperature loggers; QA/QC downloaded water temperature data. (Jun 2005)	Complete download of monthly visited water temperature loggers; QA/QC downloaded water temperature data. (Jul 2005)	Download of sites visited quarterly and monthly; QA/QC downloaded water temperature data. (Aug 2005)	Download of sites visited monthly; QA/QC downloaded water temperature data. (Sep 2005)	Commence and complete download of all water temperature loggers; QA/QC downloaded water temperature data. (Oct 2005)	Complete data QA/QC; begin preparation of 2005 stream water temperature data summary report. (Nov 2005)		
					Commence monthly reservoir profiling on French Meadows Reservoir and Hell Hole Reservoir. (Jun 2005)	Conduct Ralston Afterbay Reservoir profiling; install Ralston Afterbay margin water temperature loggers. (mid Jul 2005)	Conduct Ralston Afterbay Reservoir profiling; download Ralston Afterbay margin water temperature loggers; QA/QC downloaded water temperature data. (mid Aug 2005)	Download and remove Ralston Afterbay margin water temperature loggers; QA/QC downloaded water temperature data. (mid Sep 2005)	Complete monthly reservoir profiling on French Meadows Reservoir and Hell Hole Reservoir for the season. (Nov 2005)	QA/QC reservoir profile database and prepare data plots. (Dec 2005)		
					Install MET stations at Ralston Afterbay Reservoir, Middle Fork Interbay, and Hell Hole Reservoir; download data from six pilot program air temperature/relative humidity monitoring sites; QA/QC downloaded data. (Jun 2005)		Download data from six quarterly visited MET/air temperature/relative humidity monitoring sites; download data from three real-time sites from CDEC; QA/QC downloaded data (Aug 2005)		Download data from six quarterly visited MET/air temperature/relative humidity monitoring sites; download data from three real-time sites from CDEC; QA/QC downloaded data (Oct 2005)	Prepare MET data for inclusion in stream water temperature data summary report. (Nov 2005)		
Hydrology Study					Continue collecting existing data and developing web-based database (Jun 2005)	Submit progress report summarizing availability of existing data to resource agencies. (Jul 2005)	Meet with agencies regarding hydrology data (Aug 2005)		Semi annual retrieval of new data, update database. (Oct 2005)			

Figure 2-1. Existing Environment Study Plan Schedule-2006

3.0 PHYSICAL HABITAT CHARACTERIZATION STUDY PLAN

3.1 INTRODUCTION

The Physical Habitat Characterization Study Plan presents an integrated approach for coordinating early data collection for three interrelated study elements: geomorphology, riparian habitat and aquatic habitat. The goal of the study is to characterize geomorphic conditions, identify and describe riparian and meadow habitat, and characterize the existing habitat in the streams upstream and downstream of the Project dams and diversions. The information collected during this early study phase will assist in the design of quantitative studies needed during subsequent phases of the MFP relicensing.

The general approach for these studies is to use a combination of existing information, aerial photography, helicopter surveys, and ground reconnaissance surveys to characterize the geomorphic conditions and riparian and stream habitats. The timing and coordination of data collection and analysis under each study element has been sequenced to allow for integration of information across resource disciplines, while minimizing data collection redundancy among the disciplines and streamlining data collection over time. This process also allows for resource agency input during the study implementation phases to select study sites and refine the technical approaches as new information is developed. Figure 3-1 shows how the three study elements interrelate and how major activities will be sequenced. A summary of information that will be collected during the three study elements is described below.

Existing information relevant to geomorphology, riparian and meadow habitat, and aquatic habitat will be collected, reviewed, and summarized for all stream reaches upstream and downstream of Project facilities and on selective streams for comparison purposes during June and July, 2005. During this time, available historical aerial photography will be obtained and reviewed. A time series of historical aerial photographs will be compared beginning in the late 1930s through the present to document changes in geomorphology and riparian habitat that may have occurred over time. Present-day aerial photography will be used to collect information for characterizing the stream channel geomorphology, mapping riparian habitat locations and extent and mapping of stream habitat. Aerial photography interpretations will not be possible along the smaller streams or narrow, deeply entrenched reaches of larger streams. Information on narrow or deeply entrenched stream reaches will be collected through ground surveys, access permitting.

A helicopter survey, including video documentation, will be completed during the summer of 2005 to refine the geomorphic, riparian and aquatic habitat as characterized through interpretation of the aerial photographs. Closed canopies along the smaller streams or deeply entrenched streams may prevent channel, riparian, and aquatic habitat characterization and vegetation mapping along the smaller streams during the helicopter survey.

Figure 3-1.
Placer County Water Agency
Middle Fork American River Project
Integration of Physical Habitat Characterization Studies - 2005


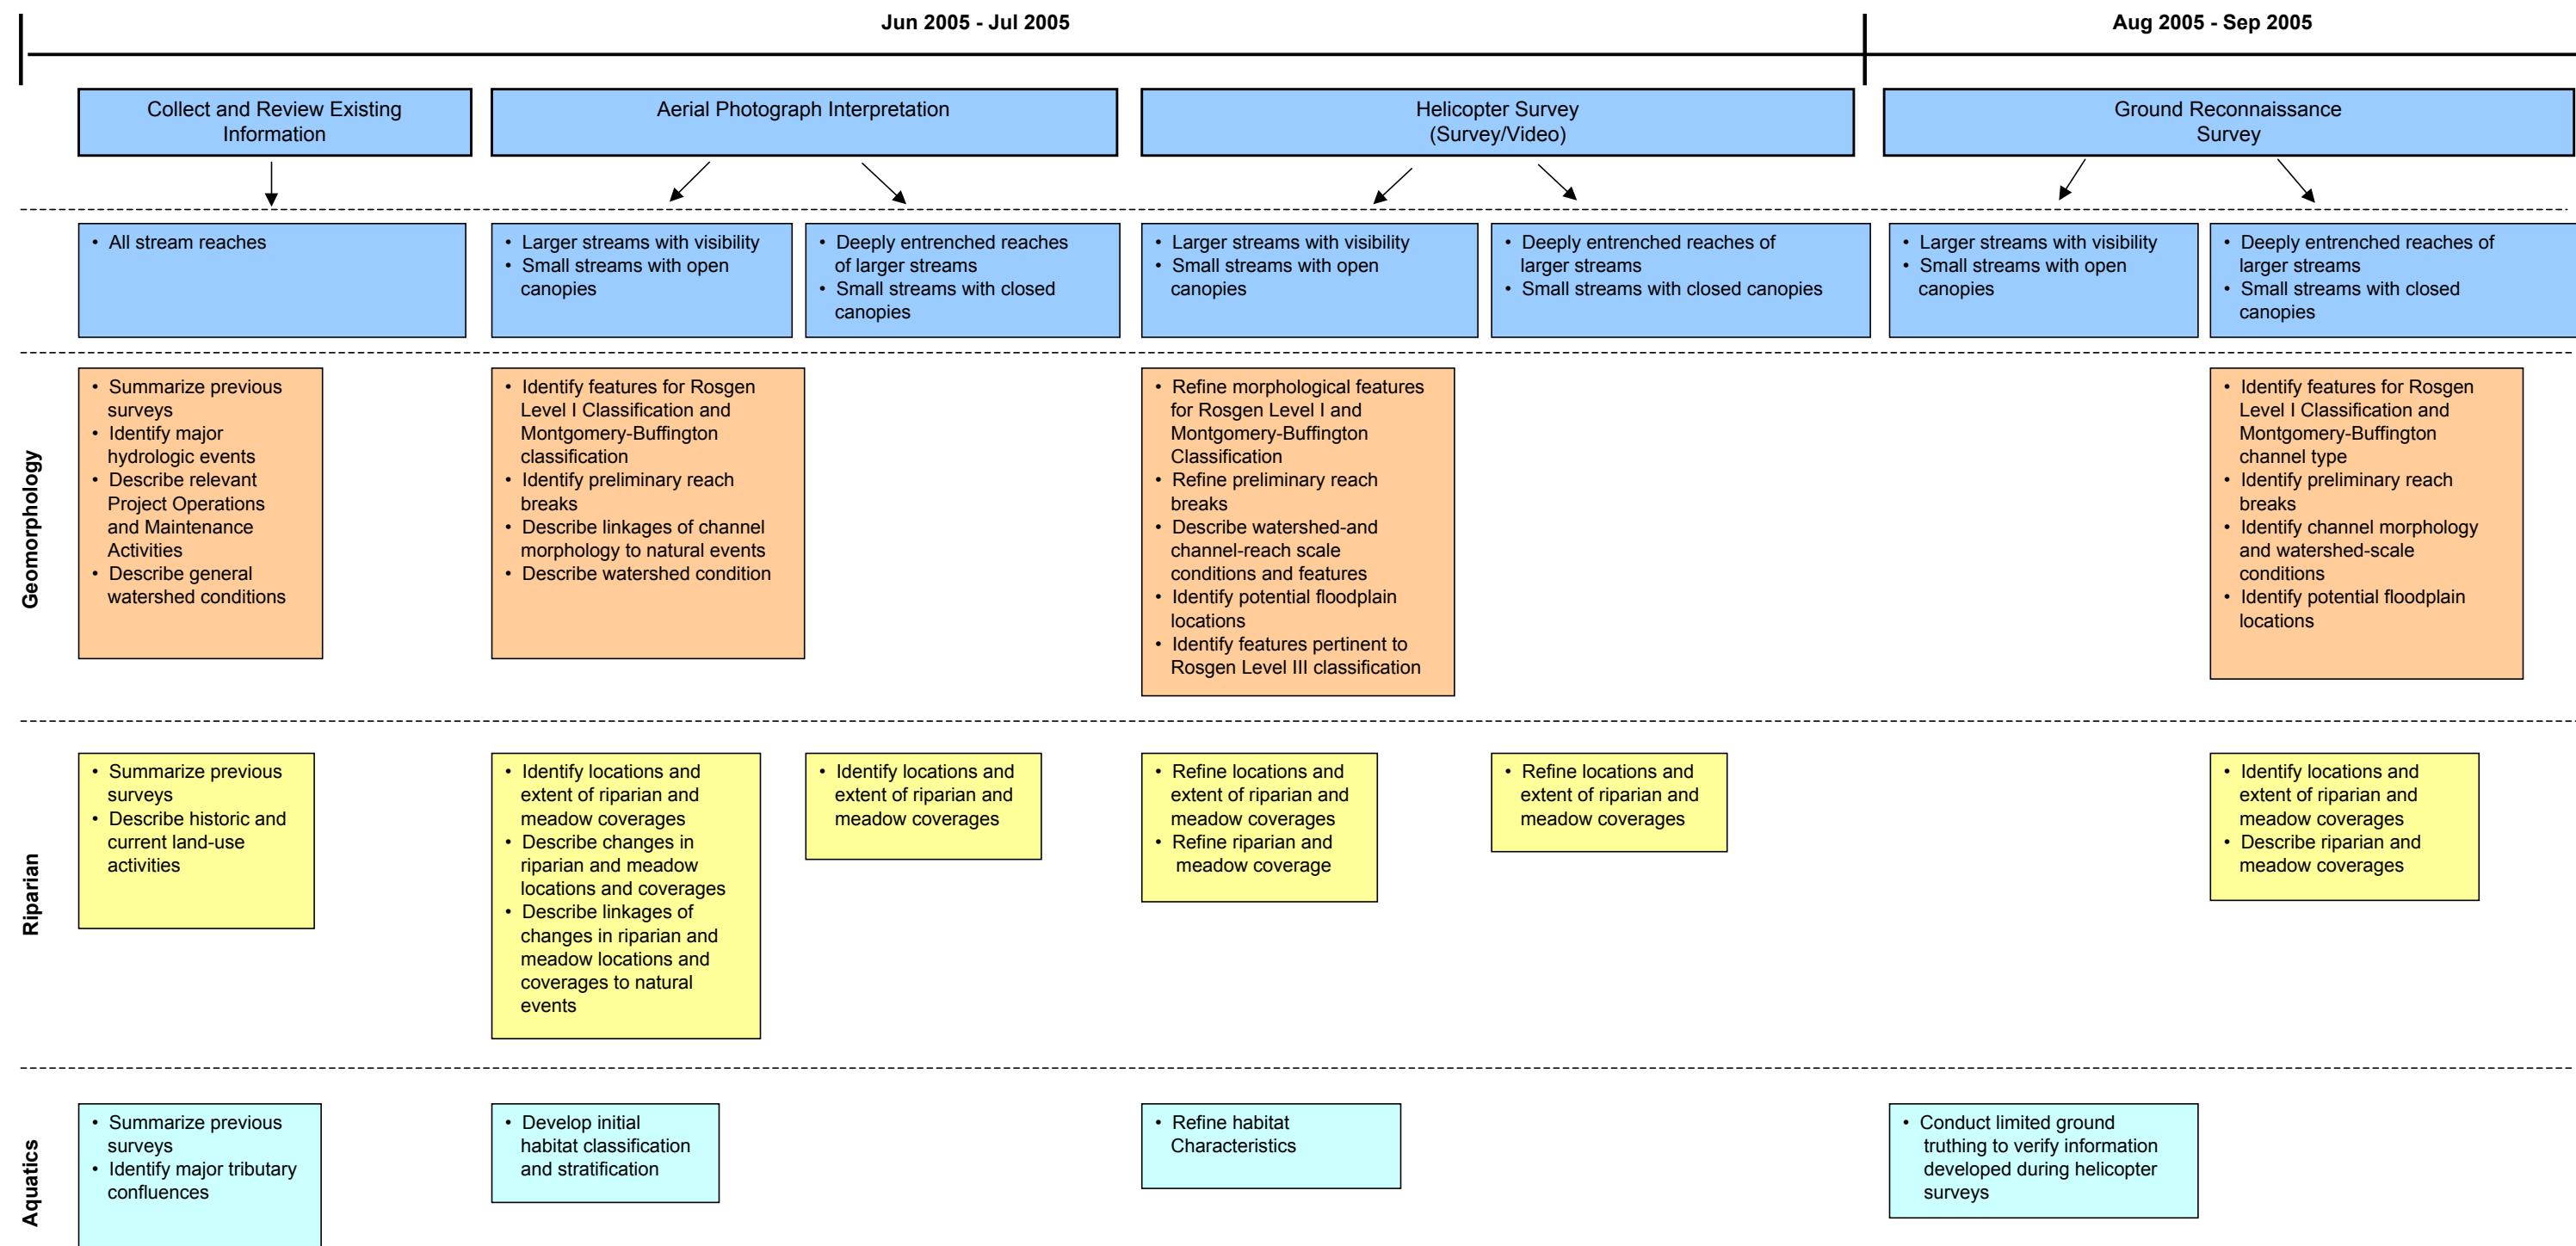


Figure 3-1.
Placer County Water Agency
Middle Fork American River Project
Integration of Physical Habitat Characterization Studies - 2006

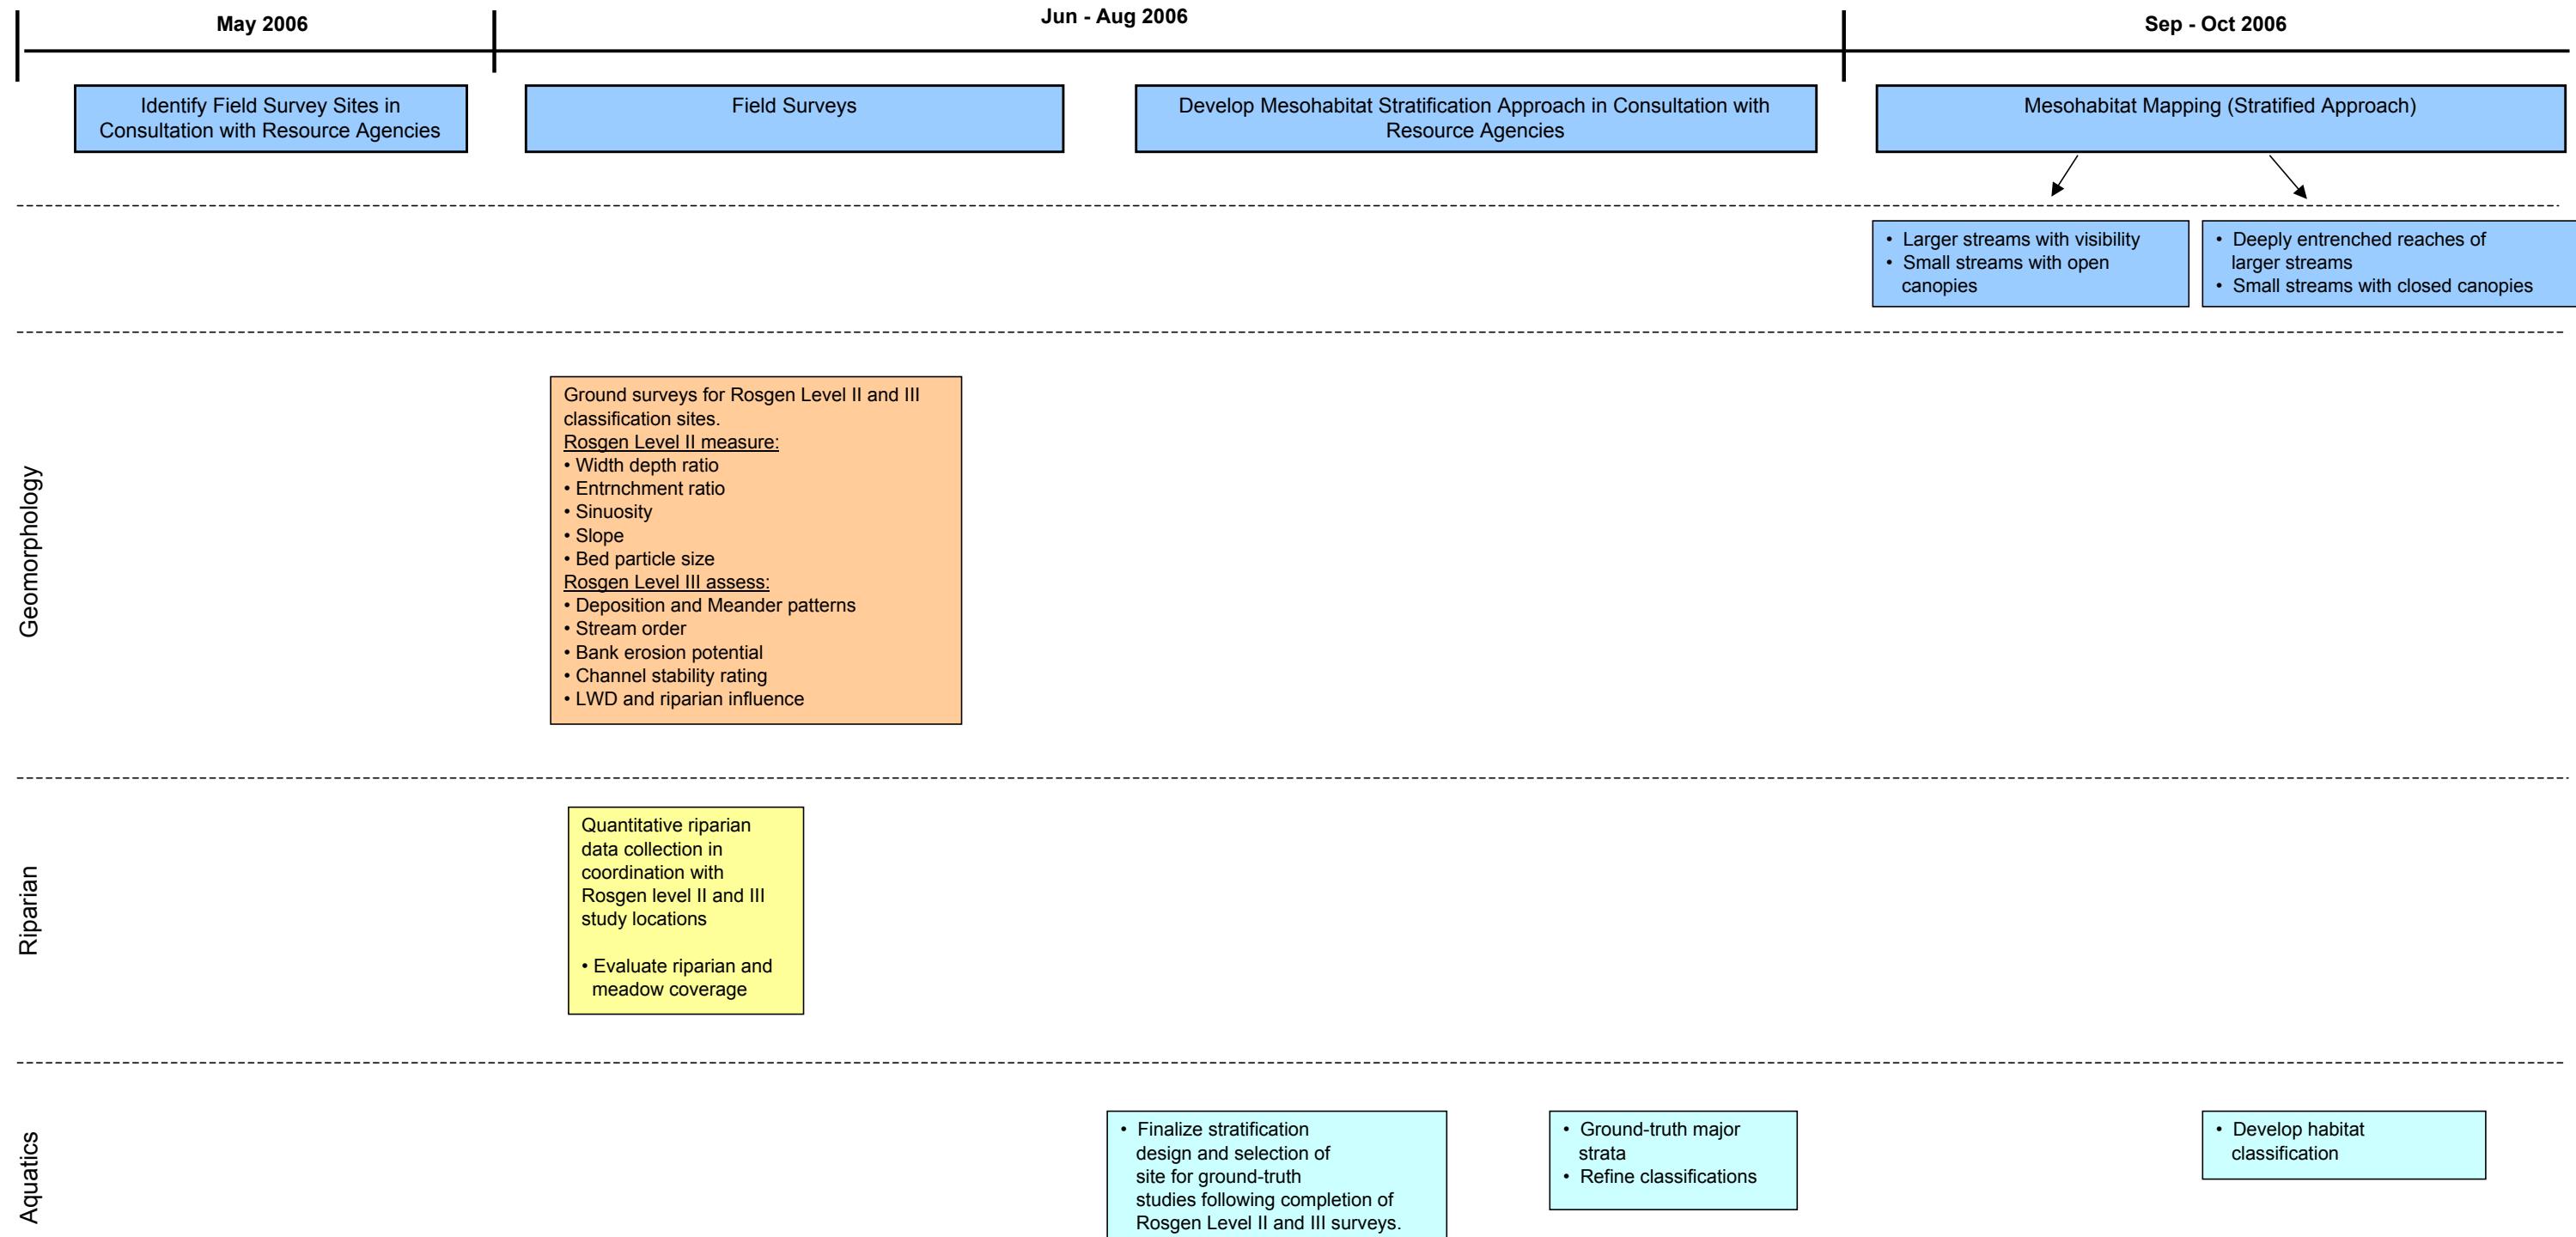

Ground reconnaissance surveys will be performed to characterize the geomorphic and aquatic habitats and to map riparian vegetation along select stream reaches that cannot be assessed from the aerial photographs or during the helicopter survey. These surveys will be completed during August and September 2005. Ground surveys will not be conducted along reaches characterized during the aerial and/or the helicopter surveys, except for ground-truthing activities that will be performed to ensure adequate characterization of geomorphic, riparian, and aquatic habitat resources. In addition, ground surveys will not be performed on stream reaches that are not safely accessible.

The 2005 survey efforts and results will be summarized in a report, which will be provided to the resource agencies for review and comment. Subsequent studies, including the selection of sites for Rosgen Level II and III stream classification and quantitative riparian studies, will be developed in consultation with the resource agencies. Field work that builds on the 2005 studies will be carried out during the summer and fall of 2006.

The Rosgen classification information will be used to help develop a sampling strategy for the mesohabitat mapping, in consultation with the resource agencies. During August through October 2006, a sub-sample of the stream reaches characterized by the aerial photographs and the helicopter surveys will be ground-truthed to refine the aquatic habitat classifications. During this same time period, habitat classification of the smaller streams with closed canopies will be developed.

3.2 GEOGRAPHIC SETTING

In general, the studies described in this Study Plan Package focus on the streams and rivers upstream and downstream of the MFP dams and reservoirs, as shown on Figure 1-1 included in the introduction and described as follows:

- Middle Fork American River from upstream of French Meadows Reservoir to its confluence with the North Fork American River.
- North Fork American River to Folsom Reservoir.
- Rubicon River from upstream of Hell Hole Reservoir to its confluence of Middle Fork American River at Ralston Afterbay.
- Duncan Creek from upstream of the Duncan Creek Diversion to its confluence with the Middle Fork American River.
- North Fork Long Canyon Creek from upstream of the North Fork Long Canyon Diversion to its confluence with Long Canyon Creek.
- South Fork Long Canyon Creek from upstream of the South Fork Long Canyon Diversion to its confluence with Long Canyon Creek.
- Long Canyon Creek from the confluence of North and South Forks of Long Canyon creeks downstream to its confluence with the Rubicon River.

The upstream study boundaries of each of the river/stream segments identified above will be determined after completion of the 2005 studies, in consultation with resource agencies, based on an evaluation of initial channel morphology data and access conditions.

It may be necessary to evaluate other streams in the vicinity of the MFP for comparison purposes. The best comparison streams (also referred to as "reference streams" or "reference reaches") are typically unimpaired by water diversions. At this time, specific comparison streams have not been identified. Potential comparison streams in the vicinity of the MFP will be identified in consultation with the resource agencies as each of the individual studies progress and more information is developed.

3.3 GEOMORPHOLOGY STUDY PLAN

This section describes the geomorphology study component of the Physical Habitat Characterization Plan. It includes a discussion of study objectives, general approach, methods, reporting and schedule.

3.3.1 STUDY OBJECTIVES

The purpose of the geomorphology study is to characterize geomorphic conditions of the river channel upstream and downstream from Project dams and diversions. The study objectives are:

- Classify and organize bypass reaches (river reaches downstream of Project dams and/or diversions) into distinct reaches based on stream morphology.
- Distinguish the relative responsiveness (i.e. "sensitivity") of river reaches to alterations of flow and sediment regimes.
- Describe geomorphic conditions of river reaches immediately upstream of Project facilities to evaluate their suitability to serve as reference reaches in later study phases.
- Identify potential comparison streams (reference reaches) in the vicinity of the MFP if reaches immediately upstream of Project facilities are determined to be unsuitable as reference reaches.
- Provide the framework for organizing future survey efforts.

3.3.2 GENERAL APPROACH

The geomorphology study will be conducted in two phases. Phase 1 will be completed in 2005 and consists of completing a Rosgen Level I and a Montgomery-Buffington classification on stream reaches upstream and downstream from Project dams and diversions. Supporting the stream classification tasks will be a review and description of general watershed conditions including geology and soil types, relative abundance of

sediment recruitment to channels from hillslope mass-wasting processes, and a description of current and historical land-use activities that may represent anthropogenic influences on channel morphology. Watershed conditions will be evaluated using existing reports and data, aerial photography, and a low-altitude aerial survey.

Phase 2 will be performed in 2006 and will consist of completing Rosgen Level II stream classification and Level III stream condition and departure information at agency-approved sites in each study reach. Agency consultation for Rosgen Level II and III study site selection will be initiated following distribution and agency review of study results collected during Phase 1. Some supporting data pertinent to Rosgen Level II and III analyses will initially be collected during the Phase 1 aerial surveys, with more detailed data collection to be performed during the Phase 2 ground surveys.

3.3.3 PHASE 1 STUDY METHODOLOGY

Phase 1 of the geomorphology study will involve the following steps.

Collect and Review Existing Data and Information

Existing data, reports, maps, and aerial photography relevant to the geomorphology study will be collected and reviewed. These data are expected to include source documentation on geology, topography, soils, and land-use (i.e., timber management history, fires, mining, grazing, road development, and water diversions). A preliminary list of reports to be reviewed includes:

- Middle Fork American River Watershed Assessment (Foresthill Ranger District 2003),
- Technical study reports for Pacific Gas and Electric's (PG&E's) Chili Bar Project,
- Technical study reports for the Sacramento Municipal Utility District's (SMUD's) Upper American River Project,
- Various sediment study reports related to the Ralston Afterbay (PCWA 1997-2002),
- Duncan Canyon/Long Canyon Paired Watershed Study (PCWA 2002).

Aerial Photo Interpretation

PCWA has acquired aerial photography that covers portions of the rivers and streams in the vicinity of the MFP from a private company, Air Photo USA. However, this photography does not cover all of the area that will be evaluated as part of the Existing Environment Studies. Accordingly, PCWA will consult with the United States Forest Service (USFS) – Tahoe and El Dorado Forests - to obtain additional aerial photography covering the streams and rivers in the vicinity of the MFP. PCWA will also

search, if necessary, other aerial photograph sources to augment the aerial photography available from the USFS.

Aerial photography available at the USFS-Foresthill Ranger District was briefly inspected to determine its usefulness for evaluating watershed and channel conditions. Specifically, dates of available photography, type, quality, and ability to discern channel features and vegetation were noted. Photographs are also available that document the STAR fire, which occurred in August 2001. The photography is most useful where the valley and channel widen, which allows channel features to be more easily discerned. In general, the usefulness of the photography increases with downstream distance from French Meadows Reservoir in the lower portions of the watershed. The closed canopy along most of the smaller streams obscures the ability to view the channel. At this time, the availability of aerial photography for the Rubicon River has not been determined, but will be investigated as part of this study.

The features to be evaluated in the aerial photographs include river planform (i.e., position and sinuosity), channel width, presence of bar deposits (bar type, size, position, frequency), type of bed morphology (pool-riffle, plane-bed, cascade, bedrock, etc), evidence of hillslope mass-wasting, and relative presence of riparian vegetation. The extent to which any particular morphological features can be readily discerned depends on the quality and scale of the photography. The aerial photography will also be used to assist with the Rosgen Level I and Montgomery-Buffington classification tasks described below.

Work products from the aerial photo-interpretation will include a text description of the geomorphic features in the stream reaches that are identifiable in the photography. If the scale of the photography is suitable for viewing in a report format, work products may include reproductions of the aerial photography outlining the particular geomorphic features.

Rosgen Level I and Montgomery-Buffington Channel Classification

Rosgen Level I classification will be completed in 2005 on each of the rivers and streams upstream and downstream of the MFP dams and reservoirs. The Level I classification is a broad characterization of channel morphology that integrates the landform and fluvial features of valley morphology with channel relief, pattern, shape, and dimension. Level I provides a consistent framework for organizing river morphology, and also provides a basis for organizing other inventories such as riparian and aquatic habitat. The following channel attributes are used to determine the Level I classification:

- Slope (using topographic maps and GIS data)
- Sinuosity (using aerial photographs, topographic maps, and GIS data)
- Width (using aerial photographs, aerial survey, and GIS data)

- Entrenchment (using aerial photographs and aerial survey)
- Valley Type (using geologic maps, aerial photographs, aerial survey, and GIS data)

Rosgen Level I classification will be based on recent aerial photography, GIS data, topographic and geologic maps, and an aerial survey of each of the study rivers and streams. Stream gradients will be graphically plotted using the topographic maps. Aerial photography will provide data on stream width, sinuosity, and an approximation of the degree of entrenchment.

Helicopter Survey

Aerial survey provides an efficient means of organizing channels into relatively uniform reaches based on their morphology. Accordingly, a low-altitude aerial survey by helicopter will be performed to collect additional data on channel morphology and watershed-scale conditions. Observations made from the helicopter will be recorded using various media, including voice recording, video and photographs. Location (latitude and longitude coordinates) will be recorded using GPS technology. The aerial survey will improve the ability to estimate the degree of channel entrenchment compared with aerial photography. The aerial survey will also be used to initially determine bed particle size, which is needed for the Rosgen Level II analysis, and to provide initial information to characterize meander patterns, depositional patterns, and bank stability, which are data needed for the Rosgen Level III analysis. These Rosgen Level III parameters will be validated with appropriate field measurements during the Phase 2 work.

The aerial survey will enhance collection of data related to Rosgen Level II and III, and to watershed-scale and channel features that influence channel morphology including:

- Sediment contributions from large-scale mass-wasting sites
- Depositional patterns in the channel and at tributary confluences
- Fine sediment deposits
- Meander patterns
- Dominant bank materials
- Relative presence of large woody debris
- Potential floodplain locations

Ground-truthing will also be performed to supplement aerial observations, ensuring adequate characterization of morphologic features for the Level I classifications.

Ground Reconnaissance Survey

Some of the stream channels, including the North and South Forks of Long Canyon Creek, and Duncan Creek, are likely to have a dense riparian canopy cover that obscures the channel, limiting the usefulness of the aerial survey and aerial photography for determining Rosgen Level I classification. In these areas, a reconnaissance-level field survey of the channel will be performed where vegetation obscures the channel for the purpose of validating the Level I classification. Measurements of channel dimensions will not be performed during the Level I reconnaissance surveys.

Montgomery-Buffington Classification

A Montgomery-Buffington classification for each of the river/stream segments will also be completed in 2005. The Montgomery-Buffington classification synthesizes stream morphology into seven reach types based on distinctive bed morphology. The seven reach types can then be grouped for analysis into three basic types of channels: colluvial, alluvial, and bedrock. Montgomery-Buffington further classifies alluvial channels into five sub-types: dune-ripple, pool-riffle, plane-bed, step-pool, and cascade. Montgomery-Buffington channel type will be determined during the aerial surveys. For those channels that are not visible from the aerial survey (due to obscuring by the vegetative canopy), the Montgomery-Buffington classification will be performed during the reconnaissance field surveys and/or the ground surveys to be performed for the Rosgen Level I classification task.

Work Products

Work products for Phase I of the geomorphology study will include a color-coded Level I stream reach classification and Montgomery-Buffington classification delineated on a base map or aerial photography. For mapping purposes, a Level I classified stream reach will have a minimum length of 0.2 miles. The base map will be annotated with the location of the various watershed and channel features listed above. A table will accompany the map to show the data associated with each of the Level I parameters. Channel geomorphic conditions will also be photo-documented during the aerial survey and used to depict selected conditions in the channel geomorphology technical report.

3.3.4 PHASE 2 STUDY METHODOLOGY

Phase 2 will consist of Rosgen Level II channel typing and a Rosgen Level III assessment of stream condition and departure from it potential, as described in the following sections.

Rosgen Level II Classification

Rosgen Level II classification sites will be selected in consultation with the resource agencies, based on the Level I results. Access to some of the streams in the vicinity of

the MFP is very limited and may constrain the ability to establish Level II quantification sites.

Level II classification is based on field measurements of five primary morphometric parameters:

- Entrenchment ratio (floodprone width divided by the bankfull width; Wfp/Wbf)
- Width-to-depth ratio (bankfull width divided by the average bankfull depth; Wbf/Dbf)
- Sinuosity (ratio of stream distance to valley distance)
- Water surface slope
- Bed particle size

These morphometric parameters will be measured at each agency-approved Level II quantification site. The measurements will be taken at two to three transects per quantification site. Standard procedures will be used to identify bankfull width using field indicators and to measure bankfull width and flood prone width, as outlined in Stream Channel Reference Sites: An Illustrated Guide to Field Technique (Harrelson *et al.* 1994). A quantification site will be at least 10 bankfull widths in length. Pebble counts will be performed at each quantification site based on procedures developed by Wolman (1954). Bankfull elevation will first be calibrated at gaging station locations with long term gage records, as described by Rosgen (1996). For mapping purposes, a Level II classified stream reach will have a minimum length of 0.2 miles.

Rosgen Level III Assessment of Stream Condition and Departure from its Potential

The Level III analysis provides a description of stream condition that is based on a determination of channel morphological stability and function. In combination, the Level II and Level III analyses are intended to provide a complete description of channel condition, and to identify stream reaches that are relatively more sensitive to disturbance. Level III parameters are to be collected at all Level II quantification sites using a combination of field surveys, aerial surveys, aerial photography, and topographic maps, and will include the following parameters:

- Deposition patterns
- Meander patterns
- Stream order
- Steambank erosion potential

- Description of the extent and relative influence of large woody debris on channel morphology
- Channel stability rating

The large woody debris inventory to be performed for the Aquatic Habitat Characterization Study will provide most of the information needed to describe the influence of large woody debris on channel morphology. In addition to the above morphological parameters, information from the riparian vegetation mapping will be integrated into the Level III assessment. This information will be used to help identify the relative vulnerability of stream reaches to bank erosion or slope instability.

Work Products

The work products for Phase 2 of the geomorphology study will consist of Level II stream reach classifications delineated on a base map or aerial photographs. For each quantification site, data associated with each of the Level II parameters will be shown in a tabular format. Transect locations will be photo-documented and monumented with rebar pins, and GPS coordinates recorded so that they can be relocated for future use, if necessary. Transects will be graphically plotted, with bankfull and floodprone widths identified. Pebble counts will be graphically plotted as cumulative particle size distribution curves and frequency histograms.

The Level III parameters will be presented in tabular format, spatially designated on maps, or presented in narrative format, as appropriate. The vegetation community type mapping will be overlaid on the Level II channel classification. Channel reaches most susceptible to disturbance and those relatively more geomorphically resilient reaches will be identified and ranked. Potentially disturbed or altered reaches will be identified, and the nature of the likely channel alteration will be described.

3.3.5 QUALITY ASSURANCE/QUALITY CONTROL

Staff performing the aerial survey will be provided with both a USGS topographic map and aerial photographs, as available, to record spatial data during the low-altitude helicopter surveys. Stream gradient data obtained from topographic maps will be graphically plotted and checked by another staff geomorphologist. Rosgen Level II data will be collected and recorded onto field data sheets to ensure that all data necessary for classification purposes is obtained. Cross-section surveys will include all major slope breaks to accurately characterize the channel form. Data will be checked in the field before leaving the site to ensure that information has been completely and accurately recorded.

3.3.6 REPORTING

The Phase I Geomorphology Study Report will provide a description of the study objectives, methods, and results. Deliverable work products described in Section 3.3.3 will be incorporated into the report, with text descriptions, tables, graphs, and

photographs, as appropriate. All study measurement sites will be identified on a base map. The study report will provide:

- Rosgen Level I and Montgomery-Buffington geomorphic classification results.
- Aerial photo interpretation results, including an overview of land-use activities in the watershed that may influence channel geomorphology.
- Identification of relative responsiveness of stream reaches to alterations of flow and sediment regimes.
- Description of geomorphic conditions upstream from Project facilities with an explanation of their likely suitability as reference reaches.
- Identification of potential comparison streams (reference reaches), if necessary.

A river mile stationing system divided into 0.1-mile units will be developed in coordination with the key resource agencies and presented on a map. Select streams in the vicinity of the MFP will be included in the stationing system. This will provide a consistent and accurate means to identify a specific location on any study stream. All future studies are expected to use the river mile stationing system for geo-referencing purposes.

The Phase II Geomorphology Study Report will provide a description of the study objectives, methods, Rosgen Level II geomorphic classification and Level III assessment of stream condition and departure results. Deliverable work products described in Section 3.3.4 will be incorporated into the report, with text descriptions, tables, graphs, and photographs, as appropriate. All study measurement sites will be identified on a base map.

3.3.7 SCHEDULE MILESTONES

The geomorphology study will be carried out in accordance with the following schedule:

Phase 1 Schedule

Date	Milestone
Jun–Jul 2005	Collect and review existing data, reports, maps, and aerial photography.
Jun–Jul 2005	Aerial photo-interpretation.
Jul 2005	Low-altitude aerial survey.
Aug–Sept 2005	Channel classification ground surveys for Rosgen Level I and Montgomery-Buffington.
Sep–Nov 2005	Data reduction.
Nov–Dec 2005	Report preparation.
Jan 2006	Distribute report to resource agencies for review and comment.

Phase 2 Schedule

Date	Milestone
Mar-May 2006	Consultation with agencies to select Rosgen Level II and III measurement sites.
Jun-Aug 2006	Ground surveys for Rosgen Level II and III analysis.
Sep-Oct 2006	Data reduction.
Nov-Dec 2006	Report preparation.
Jan 2007	Distribute report to resource agencies for review and comment.

3.4 RIPARIAN HABITAT MAPPING STUDY PLAN

3.4.1 STUDY OBJECTIVE

The purpose of the Riparian Habitat Mapping Study is to identify and describe the riparian and meadow habitat upstream and downstream of Project dams and diversions. The information collected as part of the 2005 study will be used in combination with the geomorphology information as a basis for developing quantitative riparian studies to be performed later in the relicensing process. The study objectives are to:

- Identify the locations of riparian and meadow habitat along the streams and rivers upstream and downstream of the MFP dams and reservoirs,
- Qualitatively describe riparian and meadow habitats,
- Identify unregulated streams in the vicinity of the MFP that could serve as comparison reaches for subsequent studies, and
- Identify potential historical and existing activities that may have or are currently affecting the development of riparian habitat.

3.4.2 GENERAL APPROACH

The general study approach is to map the riparian and meadow habitat along the streams and rivers upstream and downstream of MFP dams and reservoirs using a combination of existing information, aerial photography, helicopter surveys, and ground surveys. The riparian habitat mapping will encompass the entire floodplain. All riparian and meadow habitats that are or were historically connected by surface waters will be mapped, both along study streams and rivers and along any unimpaired stream and river that are mapped for comparison purposes. The main purpose of the study will be to collect qualitative information on the riparian habitat to facilitate the planning of subsequent focused riparian studies. Riparian conditions will be evaluated using existing reports and data, including a description of recent historical (beginning in the early 1900's) land-use activities. Recent aerial photographs will be obtained to document riparian and meadow coverage. This information will be supplemented with information from the geomorphology study regarding channel morphology and watershed conditions.

3.4.3 PHASE 1 STUDY METHODOLOGY

Phase 1 of the riparian habitat study will involve the following steps.

Collect and Review Existing Data and Information

Existing data, including GIS data, reports, maps, and aerial photography relevant to riparian vegetation will be collected and reviewed. These sources are expected to provide documentation on geology, topography, soils, riparian vegetation coverage and type, invasive species, and land-use (i.e. mining, timber management, recreation, road development, fires, grazing, and water diversions). Information regarding riparian vegetation and physical processes on western slope Sierra streams or other pertinent riparian literature from other geographic regions will also be reviewed. Pertinent information will be used for comparison and interpretive purposes when evaluating the streams and rivers in the MFP area. A preliminary list of reports to be reviewed include:

- Duncan Canyon/Long Canyon Paired Watershed Study (PCWA 2002),
- Technical reports associated with the relicensing of SMUD's Upper American River Project,
- Middle Fork American River Watershed Assessment (Foresthill Ranger District 2003),
- South Fork American River-Chili Bar Watershed, Lower Middle Fork American River Watershed Landscape and Roads Analyses (El Dorado National Forest 2003),
- Draft Resource Inventory Folsom Lake State Recreation Area (California Department of Parks and Recreation 2003),
- Sediment Study of Ralston Afterbay (PCWA 1997), and
- Ralston Afterbay Sediment Management Project (PCWA 2001).

Aerial Photograph Interpretation

An important component of the riparian study will be mapping the coverage and location of riparian habitat using recent aerial photography. The aerial photography component of this study will be conducted in coordination with the geomorphology study to minimize duplication of efforts.

All of the streams and rivers upstream and downstream of the MFP dams and reservoirs will be evaluated. However, visibility of the channel and riparian shrub canopy layer may be limited along deeply entrenched reaches of the larger streams and the smaller streams with closed canopies. Differences in channel geomorphic features

will be identified as part of the geomorphology study, and will be related to differences in riparian habitat as part of this study.

If the existing aerial photography is available digitally or can be scanned, and the scale, resolution, and quality are suitable for GIS, the extent of riparian coverage will be mapped and digitized, as feasible, and incorporated into GIS. Riparian coverages greater than $\frac{1}{4}$ acre in size will be displayed as polygons; a continuous or non-continuous narrow riparian corridor will be displayed as solid or dashed lines, respectively; and isolated patches of riparian vegetation that are smaller than $\frac{1}{4}$ acre in size will be displayed as points. Differences in location or extent can then be analyzed. Meadow areas will also be delineated.

Helicopter Survey

A low-altitude aerial survey by helicopter will be performed to efficiently collect additional information on the coverage and location of riparian habitat, particularly along the stream and river reaches with poor visibility on the aerial photographs. The stream channel will be videotaped during the helicopter flight to document channel and riparian characteristics. However, visibility may still be limited for the deeply entrenched reaches of the larger streams and the smaller streams with closed canopies. The survey will be coordinated with the geomorphology and aquatic habitat studies. During the flight, the location and extent of riparian vegetation will be identified with GPS and mapped on a common base map. Locations of exotic riparian vegetation, including Himalayan blackberry (*Rubus discolor*), tall whitetop (*Lepidium latifolium*), giant cane (*Arundo donax*), and tamarisk (*Tamarix chinensis*) will also be identified and mapped, to the extent feasible. The flight will be tape-recorded, and later transcribed. The GPS coordinates, location and extent of riparian coverage, and other observations will be entered into a database and will be used to modify the GIS riparian vegetation mapping on present-day aerial photographs, as needed.

Ground Survey

Some of the stream channels, including North and South Fork Long Canyon, are likely to have dense riparian or upland cover obscuring the shrub layer (i.e. willows and alders). Reconnaissance field surveys will be conducted at these locations for the purposes of mapping the riparian vegetation along the channel. During the survey, the botanist/riparian ecologist will collect qualitative information on the riparian community, including percent canopy cover (tree, shrub, and ground), dominant species of shrub and tree canopy layers, shrub size classes present, tree size classes present, riparian width, observations of encroachment and recruitment, and evidence of unusual mortality and land use. Observations of bank instability and substrate will also be noted. Ground surveys will only be performed where safe access is possible.

Locations of exotic riparian vegetation, including Himalayan blackberry (*Rubus discolor*), tall whitetop (*Lepidium latifolium*), giant cane (*Arundo donax*), and tamarisk (*Tamarix chinensis*) will also be identified and mapped, to the extent feasible. In addition, all special status plant species encountered during ground surveys will be

documented, as appropriate. This information will assist in the identification of locations for subsequent quantitative riparian studies.

The riparian habitat mapping effort will be coordinated with the geomorphology study. A botanist/riparian ecologist will accompany the geomorphologists during field surveys to identify areas of encroachment, identify areas of poor bank stability associated with a lack of vegetative cover. A botanist/riparian ecologist would also participate in the bank erosion hazard index portion of Rosgen Level III assessment.

Work Products

The Phase 1 riparian habitat study will result in the following work products:

Work products developed as part of the aerial photo-interpretation effort will include a text description of the coverage and location of riparian habitat that are identifiable in the photography. If the scale, resolution, and quality of the photography are suitable for GIS, work products may include GIS maps and/or aerial photography depicting the location and extent of riparian habitat.

The information collected during the helicopter and ground reconnaissance surveys will be used to revise the GIS base map with the location and extent of the present-day riparian vegetation along the channels. A data table will accompany the base map including GPS coordinates with the extent (polygon, continuous line, non-continuous line, or point) of the riparian vegetation collected from the helicopter survey, and percent canopy cover (tree, shrub, and ground), dominant species of shrub and tree canopy layers, shrub size classes present, tree size classes present, riparian width, observations of encroachment and recruitment, and evidence of unusual mortality and land use collected during the ground surveys. Information collected on the location of invasive species or special status will also be incorporated into GIS based maps.

3.4.4 PHASE 2 STUDY METHODOLOGY

A botanist/riparian ecologist will accompany the geomorphologists during Phase 2 of the geomorphology study, as feasible. The Rosgen Level II reaches will be selected in consultation with the resource agencies. During these Rosgen Levels II classification surveys, the botanist/riparian ecologist will collect quantitative information on the riparian community, including graminoids and other herbaceous and woody plant species composition, percent cover, height and canopy structure, relative density, size classes present, riparian width, observations of encroachment and recruitment, and evidence of unusual mortality, and land use. The data will be collected along the transects surveyed for the geomorphology studies, as feasible, in order to relate riparian habitat characteristics to elevation and distance from the channel during later phases of the relicensing process. Plots will be sampled at varying elevations and distances along the transect to evaluate changes in riparian characteristics along these gradients. Observations of bank instability, channel type and substrate will also be noted. The botanist/riparian ecologist will also collect additional vegetation information, as

appropriate, for the Rosgen Level II and III classification surveys and for the aquatic habitat surveys. The reaches will be photo-documented.

Work Products

Work products include a revised GIS base map with the location and extent of the riparian vegetation along the channels. Quantitative riparian plot data collected will be summarized, and will include text descriptions, tables, graphs, figures, photographs, and maps, as appropriate in Microsoft Excel or other appropriate formats. Information collected on the location of invasive species or special status will also be incorporated on GIS based maps.

3.4.5 QUALITY ASSURANCE/QUALITY CONTROL PROCEDURES

Aerial photographic interpretations will be checked for accuracy and completeness by a second ecologist. Mapping completed from the helicopter survey will also be checked by another botanist/ecologist. All data collected onto field datasheets will be checked by the accompanying field crew member. All electronically entered data will be checked for accuracy and completeness against the field data sheets.

3.4.6 REPORTING

The Phase 1 Riparian Habitat Report will provide a description of the study objectives, methods, and results. Deliverable work products described in Section 3.4.3 will be included in the report, with text descriptions, tables, graphs, figures, photographs, and maps, as appropriate. Pertinent GIS layers developed as part of this study will be provided on a common base map. The report will be made available to the resource agencies in both written and electronic formats.

The riparian habitat mapping will use the same river mile stationing system as used for the geomorphic and aquatic habitat studies. The stationing system will progress in 0.1-mile increments and will include all streams below and immediately above Project diversions and dams. This will provide a consistent and accurate means for identification of specific locations for all studies. Future studies are expected to use the river mile stationing system for georeferencing purposes.

The study report will identify and describe: 1) the present-day riparian and meadow habitats within the area of investigation; 2) locations that are most susceptible to fluvial geomorphic change; and 3) unregulated streams that could serve as comparison streams for subsequent studies.

The Phase 2 Riparian Habitat Report will provide a description of the study objectives, methods, and results of the qualitative riparian mapping. The text will also include documentation of the selection process of the reaches for the 2006 studies. Deliverable work products, described in Section 3.4.4, will be included, with text descriptions, tables, graphs, figures, photographs, and maps, as appropriate. Any pertinent GIS layers will be provided on a common base map.

3.4.7 SCHEDULE MILESTONES

The riparian studies will be carried out in accordance with the following schedule.

Phase 1 Schedule

Date	Milestone
Jun–Jul 2005	Collect and review existing data, reports, maps, and aerial photography and aerial photograph interpretation.
Jul 2005	Helicopter survey.
Aug–Sep 2005	Ground reconnaissance survey of riparian habitat.
Sep–Nov 2005	Data reduction/analysis.
Nov–Dec 2005	Report preparation.
Jan 2006	Distribute report to resource agencies for review and comment.

Phase 2 Schedule

Date	Milestone
May 2006	Consultation with agencies to select riparian study reaches.
Jun–Aug 2006	Quantitative riparian data collection (in coordination with geomorphology Rosgen Level II and III survey locations).
Sep–Oct 2006	Data reduction/analysis.
Nov–Dec 2006	Report preparation.
Jan 2007	Distribute report to resource agencies for review and comment.

3.5 AQUATIC HABITAT CHARACTERIZATION STUDY PLAN

3.5.1 STUDY OBJECTIVES

The purpose of the Aquatic Habitat Characterization Study is to develop information regarding the types and distributions of stream habitats in stream and river reaches upstream and downstream of Project dams and reservoirs. Aquatic habitat immediately upstream of Project facilities will be characterized and assessed as potential reference sites for future technical studies. Habitat information is important in developing an understanding of the factors that influence the distribution and abundance of fish and other stream organisms. Information developed in this study will also be used to design future technical studies involving aquatic resources.

3.5.2 GENERAL APPROACH

The streams and rivers in the vicinity of the MFP are characterized by long stretches of steep terrain with limited access points. These conditions contribute to potential safety concerns for fieldwork conducted in the most rugged and isolated areas. In order to characterize habitats under these conditions, an approach has been developed that combines the use of stratification of stream reaches (based on habitat-forming and

geomorphologic characteristics), and classification of habitats using aerial imagery and helicopter reconnaissance, with focused ground-truthing of habitats by strata. All major strata that are reasonably accessible will be ground truthed.

In order to achieve the study objective, the following approach will be utilized:

- Review existing reports, topographic maps, geological maps, hydrologic units and contributing watershed areas, and other available materials.
- Stratify and classify habitats in the study streams based on review of existing information, Rosgen Level I geomorphologic classifications, topographic maps, and aerial imagery.
- Evaluate habitats and strata in the field using helicopter reconnaissance for confirmation and a higher level of resolution.
- Incorporate Rosgen Level II information for finalization of strata.
- Select habitats in portions of major strata to be ground-truthed in consultation with resource agencies.
- Ground-truth habitats in representative lengths of major strata.

The level of ground-truthing will be determined in consultation with the resource agencies after the initial surveys are performed and the results are provided to the agencies for review.

3.5.3 STUDY METHODOLOGY

Due to the inaccessibility to large segments of the streams and rivers in the vicinity of the MFP, aquatic habitat will be characterized based on a combination of visual classification and a stratified approach to ground-level study. The study stream reaches will be initially stratified based on stream size, Project facilities, major hydrologic features, major changes in stream substrate and geology, elevation changes, Rosgen Level I analysis, differences in riparian vegetation, major sediment inputs, and land-use activities. The information will be developed based on aerial imagery, topographical maps, geological maps, the Rosgen Level I classification results, and results of riparian analyses.

Initial classification of habitats will be based on aerial imagery and a helicopter reconnaissance survey. Depending upon the type of aerial imagery available, GIS may be used to assist in defining habitat lengths, widths, and locations. The helicopter reconnaissance survey will include visual assessment and videotaping of selected reaches. Emphasis will be placed on areas that were difficult to resolve from the aerial imagery.

The strata and sites to be ground truthed will be chosen in consultation with the resource agencies after completion of the initial visual classification and the Rosgen Level II geomorphic classification. Access will be an important consideration during the selection of sites to be ground-truthed.

Visual Classification Methods

Major breaks in stream reaches will be mapped using topographical maps and aerial imagery. Visual mesohabitat typing will be performed following the general criteria of Hawkins *et al.* (1993). This type of mesohabitat typing yields a general view of the quantity of aquatic habitats available and is generally more amenable to visual classification than other approaches. Hawkins *et al.* (1993) outlines a hierarchy for types of aquatic habitats (Table 3-1). First, the aquatic habitats are divided into fast and slow water types. Second, the fast water types are grouped into turbulent or non-turbulent types. Slow water types are further grouped into dammed pool or scour pool types. The initial habitat classification of the aerial imagery will use this classification approach. If orthorectified imagery is available, GIS will be used to assist with the classification and analysis of the distribution of habitats.

Table 3-1. Hawkins *et al.* (1993) Level I and Level II Habitat Classifications.

Fast Water (Riffle/Run)		Slow Water (Pool)	
Turbulent	Non-Turbulent	Scour Pool	Dammed Pool
Riffle Habitat – High Turbulence – Caused by geomorphological differences (i.e. gradient, bed roughness, and/or step development)	Run Habitat - Non-Turbulent - Caused by geomorphological differences (i.e. gradient, bed roughness, and/or step development)	Pool Habitat – Formed by Scour - Pool created by erosion of stream bank, boulder, bedrock, etc.	Pool Habitat - Formed by Dam - Pool created by water blockage due to debris, landslide, beaver dam, large boulders, etc.

Helicopter reconnaissance surveys will be used to verify and refine the initial habitat classifications and to adjust the strata that will be used for ground-truthing. During the helicopter reconnaissance, a low elevation video of the reach will be taken at a constant slow speed to document habitat conditions and to facilitate review of stream habitats in conjunction with the aerial imagery.

Ground-truthing Methods

Major strata (representing more than 5 percent of the reach) will be sampled to ground-truth the visual classification and obtain more detailed information on aquatic habitat availability. Ground-truthing will be used to update and clarify information collected during the visual classification phase of the study. Ground-truthing will also be used to develop additional detailed information that will assist in the identification of candidate sites for potential additional studies. Stream segments that are proposed for ground truthing will be selected in consultation with the resource agencies.

During ground-truthing surveys in representative river/stream reaches, mesohabitat typing will be performed following the procedures and criteria of both Hawkins *et al.* (1993) and the more detailed information of McCain *et al.* 1990. In general, mesohabitat units represent the basic stream channel structure that aquatic organisms use for shelter, feeding, spawning, rearing or other activities. The relative abundance and distribution of the types of structures can be linked to the particular geomorphology of the stream channel. Substrate, including the presence of fines and spawning substrate, pool depth, riparian vegetation, and woody debris will be characterized and recorded. Potential fish passage barriers will be identified, described and located in the field.

The USFS Fish Habitat Relationships Technical Bulletin (McCain *et al.* 1990) (Table 3-2) uses a more detailed level of habitat typing than provided by Hawkins *et al.* (1993). McCain *et al.* (1990) outlined procedures to inventory fish habitat using riffle, run and pool habitats as the three primary categories of habitat found in stream channels. Riffle and run habitats fall into the turbulent and non-turbulent categories described by Hawkins *et al.* (1993). Pool habitats are described by their position and cause of their formation; they are either dammed pool habitats or scour pool habitats.

Table 3-2. Habitat Types and Codes Adapted from McCain *et al.* (1990).

Riffle	
Low Gradient Riffle	LGR
High Gradient Riffle	HGR
Cascade	
Cascade	CAS
Bedrock Sheet	BRS
Flatwater	
Pocket Water	POW
Glide	GLD
Run	RUN
Step Run	SRN
Trench Chute	TRC
Edgewater	EGW
Pool	
Main Channel Pool	MCP
Lateral Scour Pool	LSP
Corner Pool	CRP
Secondary Channel Pool	SCP
Dammed Pool	DPL
Backwater Pool	BWP
Step Pool	SPO

Table 3-2. Habitat Types and Codes Adapted from McCain et al. (1990).(cont.)

Pool (cont.)	
Plunge Pool	PLP
Channel Confluence Pool	CCP
Additional Unit Designations	
Dry	DRY
Road-Crossing	RDC
Concrete Box Culvert	CBC

Habitat types will be classified in the field according to both classification schemes. Habitat lengths and widths will be measured to the nearest foot using a hip-chain for length and a stadia rod or tape for widths. The mean and maximum depth of each habitat type will be measured to the nearest 0.1 feet with a stadia rod for depth of less than 20 feet. A hand held depth finder or a weighted marked rope will be used to measure depths in excess of 20 feet. During the habitat mapping surveys, the stream channel substrate will be characterized and recorded by the field team. In each mesohabitat, the percent distribution of different size classes of substrate will be visually estimated to the nearest 10 percent. Streambed substrate classes will be grouped as follows:

- Fines (organic material)
- Fines (silt/clay), <0.062 mm;
- Sands, 0.062 - 2 mm;
- Gravels, 2 - 64 mm;
- Cobbles, 64 - 256 mm;
- Boulders, 256 - 4096 mm; or
- Bedrock.

A sand card will be carried by each field team to aid in the classification of sand and fine materials.

The presence of fines and spawning substrate, riparian vegetation, canopy and large woody debris in each mesohabitat will be recorded on datasheets. Spawning gravel, including gravel present in small pockets, will be measured as the estimated amount (square feet) of spawning-sized gravel (0.25-3.0 inches diameter, adapted from Bjorn and Reiser (1991)) occurring in each mesohabitat. In addition, habitat areas with spawning gravel will be assigned a "Spawning Quality" score of "Poor, Fair, Good, or Excellent." The score will be based primarily on substrate composition, since much of the mapping will be conducted during the summer months when streamflow will be low.

The quality of spawning gravel will be characterized based on the angularity of the gravels and embeddedness. Gravels of higher suitability for use by spawning trout are highly rounded. Gravel that is more angular is considered of lower quality for spawning. Generally, a “Good” or “Excellent” score will be assigned to rounded spawning gravels with little sand and fines present and low embeddedness. Spawning gravels with high embeddedness and a high proportion of sand will receive a “Fair” or “Poor” score, regardless of angularity. The scoring criteria are presented in Table 3-3.

Table 3-3. Description of Spawning Gravel Quality.

Spawning Quality	Description of Substrate
Excellent	Round-shaped spawning gravels loose in substrate.
Good	Round-shaped spawning gravels slightly embedded in substrate or moderately jagged-shaped spawning gravels loose in substrate.
Fair	Round-shaped spawning gravels embedded in substrate or moderately jagged-shaped spawning gravels slightly embedded in substrate.
Poor	Round or jagged-shaped gravels deeply embedded in substrate.

Wolman pebble counts will be performed at stream segments encountered during the mesohabitat mapping effort with substrates that are different from Rosgen Level II segments previously characterized as part of the geomorphology studies. The locations of the mesohabitat studies will be coordinated with the geomorphology study reaches to ensure that the two studies are integrated.

Stream bank erodability will be visually estimated in one of four categories: zero, low, medium or high. A score will be assigned to the stream banks of each habitat. Zero will be typically assigned to stream banks that have very low erodability, such as bedrock. Low and medium scores will be assigned to stream banks that have good bank structures, such as an intact riparian zone or boulder/cobble dominated bank. High scores will be assigned to stream banks that are very unstable; such as sand dominated stream banks.

Riparian habitat information will be developed including a description of the dominant vegetation covering the stream banks. Vegetative groups will include no vegetation, grasses, shrubs, deciduous trees, coniferous trees, and mixed trees. Stream bank vegetation will be characterized by the percentage category of stream bank covered by vegetation. The categories recorded will be: zero, 1-25, 25-50, 50-75, and 75-100 percent. Specific information related to aquatic habitat (e.g. shade) will be developed by an aquatic biologist and will be measured to the nearest 10 percent using a spherical densiometer. Riparian graminoids will be mapped as part of the aquatic habitat characterization study and as part of the riparian habitat mapping study. Presence and absence of graminoids and approximate cover will be estimated along each stream bank within each habitat unit as part of this study element. Graminoid mapping will only be conducted along larger rivers where hardhead are known or expected to reside.

Large woody debris will be counted in each stream habitat unit. The woody debris data will be collected according to the Stream Condition Inventory by Region 5, USFS. In this protocol, the length of all downed wood recorded would be at least one-half bankfull width and recorded if any part lies in the bankfull channel. Any woody debris over 0.1 meter in width will be recorded. An example of the inventory sheet is provided in Figure 3-2. In the case of debris jams or other accumulations of wood, all pieces of wood meeting the criteria will be counted.

Stream Condition Inventory-Field Intensive Pass 1 Sensitive Reach "LWD/Pebble Counts"		<i>Measurements in Metric Units</i>	Page ____ of ____						
Stream: _____	Forest: _____	Sensitive Reach ID# _____	Date: _____						
Crew: _____									
Use back of form to describe Sensitive Reach Start									
Cross Section Candidate Sites (Circle 3 Randomly Selected Sites)									
Site #									
Distance									
Bankfull Width: _____		Min. Debris Length (=1/2 average bankfull width): _____							
Woody Debris Tally (Dead and Downed Wood)									
Length Class (m)	Diameter Class (m)								
	(D 1) 0.1 to 0.2	(D 2) 0.2 to 0.4	(D 3) 0.4 to 0.8	(D 4) 0.8 to 1.6	(D 5) > 1.6				
	(L 1) < 1								
(L 2) 1 to 2									
(L 3) 2 to 4									
(L 4) 4 to 8									
(L 5) 8 to 16									
(L 6) 16 - 32									
(L 7) > 32									
Aggregate Tally	Total Aggregates								
				Total Pieces of Wood in Aggregates					
Pebble Count Tally (Secondary Axis in mm)									
Sands	Gravels					Cobbles		Boulders	Bedrock
<2	2 to 4	4 to 8	8 to 16	16 to 32	32 to 64	64 to 128	128 to 256	>256	
Class 1	Class 2	Class 3	Class 4	Class 5	Class 6	Class 7	Class 8	Class 9	Class 10
Identification of Survey Segment									
A. Sensitive Reach Length (m) _____			B., A minus 1000m _____ (if A is greater than 1000m)						
C. Random # between 1 and B _____			D. Survey Segment lies between C (Survey Segment Start) _____ and 1000+C (Survey Segment End) _____						
Comments: _____									
SciFi - n1 6/27/98									

Figure 3-2. Example of Woody Debris Inventory Data Sheet from USFS R-5 (1996) Stream Condition Inventory.

Potential fish passage barriers will be visually assessed and characterized by experienced fish biologists. These will include culverts, road crossings, debris jams, cascades, bedrock sheets, shallow riffles, and dewatered areas, among others. Additionally, a visual assessment of potential fish passage barriers at the mouths of tributaries will be conducted. Photographs will be taken and spatial coordinates collected using GPS for each of the barriers identified during the ground surveys. Crews also will identify the location of prominent features, such as tributaries, gaging stations, diversions, recreational facilities and other facilities with GPS coordinates.

Field crews will visually estimate flow in tributaries that are encountered during the habitat mapping ground surveys. Specifically, field crews will visually estimate stream width, average depth, and velocity of tributaries immediately upstream of the confluence. Spot measurements of water temperature will be taken with a standard mercury thermometer.

Incidental observations of fish, wildlife, and amphibians will be recorded on maps and in notebooks, along with GPS coordinates. Photographs of amphibians or reptiles will be taken, when the species cannot be identified by sight.

3.5.4 QUALITY CONTROL PROCEDURES

All data entered onto field data sheets will be checked for accuracy and completeness by the accompanying field crewmember. All data entered electronically will be checked for accuracy against the field data sheets.

3.5.5 REPORTING

A report describing the habitat and channel conditions associated with the streams and rivers in the vicinity of the MFP will be prepared. The report will summarize conditions observed during stream habitat mapping. Work products described in Section 3.5.4 will be incorporated into the report, with text descriptions, tables, graphs, and photographs, as appropriate. All study measurement sites will be identified on a base map. The report and data will be made available to the resource agencies on CD. The report will include study objectives, study area including sampling locations, methods, analysis results, discussion and conclusions.

The aquatic habitat characterization will utilize the same river mile stationing system as that used for the geomorphology study and the riparian habitat mapping. The stationing system will progress in 0.1-mile units and will include all streams below and immediately above Project diversions. This will provide a consistent and accurate means to identify a specific location on any study stream. All future studies are expected to use the river mile stationing system for geo-referencing purposes.

3.5.6 SCHEDULE MILESTONES

The stream habitat characterization study will be completed during 2005 and 2006 in accordance with the following schedule.

2005 Schedule

Date	Milestone
Jun-Jul 2005	Collect and review existing data, reports, maps, and aerial imagery.
Jul-Sep 2005	Initial visual classification and aerial aquatic habitat assessment.
Sep-Dec 2005	Refine initial habitat characterization and stratification.
Jan 2006	Report to resource agencies for review and comment.

2006 Schedule

Date	Milestone
Jun-Aug 2006	Finalize stratification of Study reaches (following completion of the Rosgen Level II study).
Aug-Oct 2006	Ground-truthing aquatic habitat characterization.
Nov-Dec 2006	Data reduction/analysis.
Jan 2007	Report to resource agencies for review and comment.

3.6 REFERENCES

The following references were used to develop the Physical Habitat Characterization Study Plan and are available for review by the public and resource agencies from PCWA.

Bjorn, T.C. and D.W. Reiser. 1991. Habitat requirements for salmonids in streams. Pages 83-138 in W.R. Meehan [editor] Influences of forest and range land management of salmonid fishes and their habitats. American Fisheries Society Special Publication 19, Bethesda, MD.

Busch, W.D., and Sly, P. G., Editors. 1992. The Development of an Aquatic Habitat Classification for Lakes. CRC Press. Boca Raton, FL.

California Department of Parks and Recreation. 2003. Draft Resource Inventory Folsom Lake State Recreation Area.

El Dorado National Forest. 2003. South Fork American River-Chili Bar Watershed, Lower Middle Fork American River Watershed Landscape and Roads Analyses.

Foresthill Ranger District. 2003. Middle Fork American River Watershed Assessment.

- Harrelson, Cheryl C., C.L. Rawlins, John P. Potyondy. 1994. Stream channel reference sites: an illustrated guide to field technique. USDA, Forest Service GTR RM-245, Fort Collins, Colorado.
- Hawkins, C. P., J. L. Kershner, P. A. Bisson, M. D. Bryant, L. M. Decker, S. V. Gregory, D. A. McCullough, C. K. Overton, G. H. Reeves, R. J. Steedman, and M. K. Young. 1993. A hierarchical approach to classifying habitats in small streams. *Fisheries*. 18(6): 3-12.
- McCain, M., D. Fuller, L. Decker, and K. Overton. 1990. Stream habitat classification and inventory procedures for northern California. FHR Currents: R-5's fish habitat relationships technical bulletin. No. 1. US Dept. of Agriculture, Forest Service, Pacific Southwest Region, Arcata, California.
- Meals, K. and L. Miranda. 1991. Variability in abundance of age-0+ centrarchids among littoral habitats of flood reservoirs in Mississippi. *North American Journal of Fisheries Management* 11:298-304.
- Montgomery, D.R. and J.M. Buffington. 1997. Channel reach morphology in mountain drainage basins. *Geological Society of America Bulletin* 109: 596-611.
- Nack, S., D. Brunnell, D. Green and J. Forney. 1993. Spawning and nursery habitats of largemouth bass in the tidal Hudson River. *Transactions of the American Fisheries Society* 12:208-216.
- Placer County Water Agency. 1997. Sediment Study of Ralston Afterbay. Prepared by Geotechnical and Hydraulic Engineering Services Bechtel Corporation.
- Placer County Water Agency. 2001. Ralston Afterbay Sediment Management Project. Prepared by Jones and Stokes.
- Placer County Water Agency. 2002. Duncan Canyon/Long Canyon Paired Watershed Study. Prepared by WRC Environmental. 22 pp.
- Rosgen, D.L. 1996. Applied river morphology. Wildland Hydrology, Pagosa Springs, Colorado.
- Wolman, G.M. 1954. A method of sampling coarse river bed material. *Transactions of the American Geophysical Union* 35: 951-956.
- US Forest Service Region 5 (USFS R5). 1996. Pacific Southwest Region Stream Condition Inventory Version 3.4 (6/27/96). USFS Region 5, Vallejo, California.

4.0 WATER TEMPERATURE STUDY PLAN

4.1 INTRODUCTION

Some historical water temperature data is available for the streams and rivers in the vicinity of the MFP. However, historical data is not available for all of the streams and rivers, and those data that do exist consist mainly of spot measurements taken during water quality monitoring and flow gage station maintenance. Although potentially useful for some comparisons, spot water temperatures alone cannot characterize the water temperature regimes of streams and rivers in the vicinity of the MFP. Historic temperature data for the MFP reservoirs is not available.

A limited amount of meteorological data is available from four stations situated in the vicinity of the MFP – one located at Greek Store in the Duncan Canyon Creek basin, one located in the upper Duncan Canyon Creek basin, one located near Hell Hole Reservoir, and one located near Georgetown. The Greek Store station is operated by the U.S. Bureau of Reclamation (USBR) and measures, among other parameters, precipitation and air temperature. Data from this site are available from 1995 to the present. The upper Duncan Canyon Creek area station is operated by the USFS and measures, among other parameters, relative humidity, solar radiation, precipitation and air temperature. Data from this site are available from 2001 to the present. The Hell Hole station is operated by the USFS. Air temperature and precipitation data are available from this station from 1991 through April 2004. Relative humidity data are available from 1995 through April 2004. The Georgetown station is operated by the USBR and has measured air temperature since 1998 and precipitation since 1988.

Considering the limited availability of water temperature data for the MFP, PCWA initiated a stream water temperature monitoring pilot program in the fall of 2003, which included the installation of 22 water temperature loggers. During the summer of 2004, eight additional stream water temperature monitoring sites were established and a reservoir profiling program was developed and initiated at French Meadows and Hell Hole reservoirs. To support the water temperature pilot program, PCWA installed six ambient air temperature/relative humidity loggers to obtain basic meteorological data. Appendix B, titled "*Summary of Stream and Reservoir Water Temperature Pilot Program*," describes PCWA's reservoir profiling and water temperature monitoring pilot program. Specific recommendations and considerations for future water temperature and meteorological monitoring also are provided in Appendix B.

This Water Temperature Study Plan (Study Plan) describes PCWA's approach to augmenting the existing water temperature and meteorological data sets and is based upon the methodologies, protocols, and recommendations developed and refined during implementation of the pilot program in 2003 and 2004. The work described in this Study Plan will be conducted in 2005 and 2006. Because warm summer water temperatures are a potential biological concern, data collection will focus on obtaining summer water temperature data and ensuring the loggers are operating properly during the late spring through early fall period. A report summarizing the 2005 study results and other existing temperature information will be prepared and provided to the resource agencies

in early 2006 for review and comment. Monitoring in 2006 will be adjusted and refined, in coordination with the resource agencies, based on the 2005 study results and resource agency comments. A report describing the 2006 monitoring effort will be prepared and provided to the resource agencies in early 2007.

4.2 STUDY OBJECTIVES

The objective of the Water Temperature Study Plan is to establish a water temperature monitoring station array that would enable PCWA to collect a consistent, thorough data set that can be used to adequately characterize water temperatures in the reservoirs and streams associated with the MFP. The water temperature and reservoir profile data will be used to characterize water temperature conditions in the Rubicon River, the Middle Fork American River, Duncan Canyon Creek and Long Canyon Creek. In addition, the data will be used to initially evaluate whether the water temperatures downstream of Project facilities meet the Cold Freshwater Habitat beneficial use goals identified in the California Regional Water Quality Control Board, Central Valley Region's "*Water Quality Control Plan (Basin Plan) for the Sacramento River and San Joaquin River Basins*" (1998).

4.3 GENERAL APPROACH

The general approach outlined in this Study Plan focuses on building upon and supplementing the existing water temperature data set. This Study Plan describes PCWA's stream temperature monitoring station array, including existing and proposed stations, and describes how water temperature data will be collected, stored and analyzed. In addition, this Study Plan describes how water temperature and other parameters will be measured in the Project reservoirs, and how and where meteorological data (e.g., air temperature, relative humidity) will be collected.

4.4 STUDY METHODS

Implementation of the stream and reservoir water temperature monitoring pilot program during 2003 and 2004 provided useful experience and insight regarding the operation and maintenance of a water temperature monitoring program. This Study Plan describes how PCWA will augment the water temperature information developed through the pilot program and is based on the results and recommendations provided in the pilot program report included in Appendix B. PCWA's Study Plan includes a stream water temperature monitoring program, a reservoir monitoring program, and a meteorological monitoring program, each of which is described in the following sections.

4.4.1 STREAM WATER TEMPERATURE MONITORING

As a result of the pilot program, a total of 32 temperature monitoring stations are currently established in the vicinity of the MFP, of which 30 were installed by PCWA (SMUD and the USGS installed the other two stations). At the request of the resource agencies, PCWA will install additional temperature monitoring stations at various locations along Duncan Creek, Long Canyon Creek, the Middle Fork American River

and the Rubicon River, pending an access investigation. Combined, the water temperature monitoring station array will consist of up to 50 strategically positioned water temperature monitoring sites, depending upon the results of the accessibility assessment. The locations of these monitoring sites are shown in Figure 4-1 and are described in Table 4-1. In addition, Appendix C contains a large format map, which depicts the locations of all of the existing and proposed temperature monitoring station locations with respect to the existing and proposed flow gaging stations and nodes that will be used for hydrologic analyses.

Upgrading the temperature monitoring station array will involve four specific components, as follows:

- PCWA will install additional water temperature stations at 13 sites that are already known to be accessible;
- PCWA will install up to five more water temperature monitoring locations, pending an access investigation;
- PCWA will reinstall four of the original monitoring stations that were either lost due to vandalism or are subject to recording erroneous data (i.e., air temperature data at certain times); and
- PCWA will install redundant water temperature loggers at all water temperature monitoring locations.

Each of these components are described further in the following.

Placeholder for Figure 4-1

Figure 4-1 Temperature Monitoring Station Array

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

Table 4-1. Current And Proposed Water Temperature Monitoring Locations Associated with the MFP, and their Operational Status and Proposed Download Frequency.

Line #	Stream	Description of Location	Station ID	Date Installed or to be Installed	Operational Status	Download Frequency
Middle Fork American River System						
1	Duncan Canyon Cr.	Directly upstream from Duncan Canyon Cr. Dam	DC1	September 24, 2003	Operational	Jun, Oct
2	Duncan Canyon Cr.	Directly downstream from Duncan Canyon Cr. Dam	DC2	September 24, 2003	Operational	Jun, Oct
3	Duncan Canyon Cr.	Directly upstream from MF American River	DC3	Spring 2005	To be installed, pending access	Jun, Oct
4	Middle Fork American R.	Directly upstream from French Meadows Reservoir	MF1	October 2, 2003	Operational	Monthly Jun – Oct
5	Middle Fork American R.	Directly downstream from French Meadows Dam	MF2	September 24, 2003	Operational	Jun, Oct
6	Middle Fork American R.	Directly upstream from Middle Fork Powerplant	MF3	October 9, 2003	Operational	Jun., Aug., and Oct.
7	Middle Fork American R.	Directly downstream from Middle Fork Powerplant outlet	IB1	August 17, 2004	Operational	Jun, Aug, and Oct
8	Middle Fork American R.	Directly downstream from Middle Fork Interbay	MF4	October 9, 2003	Operational	Jun, Aug, and Oct
9	Middle Fork American R.	Directly downstream from Ralston Afterbay Dam	MF5	October 9, 2003	To be reinstalled	Jun, Aug, and Oct
10	Middle Fork American R.	Directly downstream from Oxbow Powerplant	MF6	October 14, 2003	Operational	Monthly Jun – Oct
11	Middle Fork American R.	Downstream from the North Fork of the Middle Fork American R. confluence	MF7	October 15, 2003	Operational	Jun, Aug, and Oct
12	Middle Fork American R.	Directly upstream from North Fork American R. confluence	MF8	October 15, 2003	Operational	Monthly Jun – Oct

Table 4-1. Current And Proposed Water Temperature Monitoring Locations Associated with the MFP, and their Operational Status and Proposed Download Frequency (continued).

Line #	Stream	Description of Location	Station ID	Date Installed or to be Installed	Operational Status	Download Frequency
13	Middle Fork American R.	Downstream from Ruck-a-Chucky rapids	MF9	August 24, 2004	Operational	Jun, Aug, and Oct
14	Middle Fork American R.	Directly upstream from Ralston Afterbay	MF10	Spring 2005 ¹	To be installed	Jun, Aug, and Oct
15	Middle Fork American R.	Upstream from Duncan Canyon Cr. Confluence	MF11	Spring 2005	To be installed, pending access	Jun, Oct
16	Middle Fork American R.	Approximately midway between French Meadows Dam and Duncan Canyon Cr.	MF12	Spring 2005	To be installed	Jun, Oct
17	Middle Fork American R.	Approximately midway between Interbay Dam and Ralston Afterbay	MF13	Spring 2005	To be installed pending access	Jun, Oct
18	Middle Fork American R.	Directly upstream from Volcano Canyon Cr.	MF14	Spring 2005	To be installed	Jun, Oct
19	Middle Fork American R.	Directly upstream from Otter Cr. confluence	MF15	Spring 2005	To be installed	Jun, Oct
20	Middle Fork American R.	Directly upstream from Canyon Cr. confluence	MF16	Spring 2005	To be installed	Jun, Oct
21	Otter Cr.	Directly upstream from Otter Cr. confluence	OC1	Spring 2005	To be installed	Jun, Oct
22	Canyon Cr.	Directly upstream from Canyon Cr. confluence	CC1	Spring 2005	To be installed	Jun, Oct
23	North Fork of the Middle Fork American R.	Directly upstream from Middle Fork American R. confluence	NM1	August 16, 2004	Operational	Monthly Jun – Oct

¹ The water temperature loggers scheduled to be installed during Spring 2005 will be installed as soon as streamflow levels recede to the point where it is safe to install the loggers and when the loggers can be placed in locations that will remain wetted throughout the summer and fall.

Table 4-1. Current And Proposed Water Temperature Monitoring Locations Associated with the MFP, and their Operational Status and Proposed Download Frequency (continued).

Line #	Stream	Description of Location	Station ID	Date Installed or to be Installed	Operational Status	Download Frequency
24	Five Lakes Cr.	Directly upstream from Hell Hole Reservoir	FL1	September 30, 2003	Operational	Jun, Oct
Rubicon River System						
25	Rubicon R.	Directly upstream from Hell Hole Reservoir	RR1	September 30, 2003	Operational	Jun, Oct
26	Rubicon R.	Directly downstream from Hell Hole Dam	RR2	October 14, 2003	Operational	Jun, Oct
27	Rubicon R.	Downstream from Hell Hole Dam and directly downstream from intermittent river segment	RR3	October 14, 2003	Operational	Jun, Oct
28	Rubicon R.	Directly upstream from Ralston Powerplant	RR4	October 2, 2003	Operational	Jun, Aug, and Oct
29	Rubicon R.	Directly upstream from SF Rubicon R.	RR5	August 25, 2004	Operational	Jun, Oct
30	Rubicon R.	Directly downstream from SF Rubicon R.	RR6	August 25, 2004	Operational	Jun, Oct
31	Rubicon R.	Between SF Rubicon R. and Pilot Cr.	RR7	Spring 2005	To be installed, pending access	Jun, Oct
32	Rubicon R.	Directly upstream from Pilot Cr.	RR8	August 18, 2004	Operational	Jun, Aug, and Oct
33	Rubicon R.	Directly downstream from Long Canyon Cr.	RR9	Spring 2005	To be installed	Jun, Oct
34	Rubicon R.	Approximately midway between Hell Hole Dam and SF Rubicon R.	RR10	Spring 2005	To be installed	Jun, Oct
35	Rubicon R.	Near the Big Grizzly Canyon Cr. confluence	RR11	Spring 2005	To be installed, pending access	Jun, Oct
36	South Fork Rubicon R. ^a	Directly downstream from Gerle Cr. confluence	SFRR1	N/A	Operational	N/A
37	South Fork Rubicon R. ^a	Directly upstream from Rubicon R. confluence	SF1	Spring 2005	To be installed	Jun, Oct

Table 4-1. Current And Proposed Water Temperature Monitoring Locations Associated with the MFP, and their Operational Status and Proposed Download Frequency (continued).

Line #	Stream	Description of Location	Station ID	Date Installed or to be Installed	Operational Status	Download Frequency
38	Rubicon R.	Directly downstream from Ralston Powerplant outlet	OX1	August 16, 2004	Operational	Jun, Aug, and Oct
39	Long Canyon Cr.	Directly upstream from Confluence with Rubicon R.	LC1	August 24, 2004	Operational	Jun, Oct
40	Long Canyon Cr.	Downstream from North-South Long Canyon Cr. confluence	LC2	Spring 2005	To be installed	Jun, Aug, and Oct
41	Long Canyon Cr.	Directly upstream from the Wallace Canyon Cr. confluence	LC3	Spring 2005	To be installed	Jun, Oct
42	Wallace Canyon Cr.	Directly upstream from the Long Canyon Cr. confluence	WC1	Spring 2005	To be installed	Jun, Oct
43	North Fork Long Canyon Cr.	Directly upstream from North Fork Dam	NL1	October 2, 2003	To be reinstalled	Jun, Aug, and Oct
44	North Fork Long Canyon Cr.	Directly downstream from North Fork Dam	NL2	September 24, 2003	Operational	Jun, Aug, and Oct
45	South Fork Long Canyon Cr.	Directly upstream from South Fork Dam	SL1	September 24, 2003	To be reinstalled	Jun, Aug, and Oct
46	South Fork Long Canyon Cr.	Directly downstream South Fork Dam	SL2	October 2, 2003	Operational	Jun, Aug, and Oct
47	Pilot Cr.	Directly upstream from Rubicon R. confluence	PC1	October 24, 2003	Operational	Jun, Aug, and Oct
North Fork American River System						
48	North Fork American R.	Directly upstream from Middle Fork American R. confluence	NF1	October 15, 2003	To be reinstalled	Jun, Aug, and Oct
49	North Fork American R.	Directly downstream from Middle Fork American R. confluence	NF2	October 15, 2003	Operational	Jun, Aug, and Oct
50	North Fork American R. ^b	Former Auburn Dam site	11433790	July 1999	Operational	Real-time

^aSouth Fork Rubicon R. water temperature monitoring station maintained by SMUD.

^bNorth Fork American R. at Former Auburn Dam site water temperature monitoring station maintained by USGS.

Installation of 13 Additional Water Temperature Monitoring Stations. PCWA will install 13 new water temperature stations in the vicinity of the MFP. The identification of these additional water temperature monitoring sites resulted from inspection of the available water temperature data and the spatial array of sites and input from the resource agencies, with consideration of the objectives of the Water Temperature Study Plan. Combined with the existing temperature station array, these sites will allow PCWA to evaluate: 1) water temperature conditions upstream and downstream of Project facilities; 2) the influence of tributary streams on water temperature; and 3) water temperature persistence in relatively long river reaches. Additional sites could be considered in the future as more data from the existing stations become available and are evaluated. The 13 additional sites include:

- Middle Fork American River upstream from Ralston Afterbay (MF10);
- Middle Fork American River approximately midway between French Meadows Dam and Duncan Canyon Creek (MF12);
- Middle Fork American River directly upstream from Volcano Canyon Creek (MF14);
- Middle Fork American River directly upstream from Otter Cr. confluence (MF15);
- Middle Fork American River directly upstream from Canyon Cr. confluence (MF16);
- Otter Creek directly upstream from Middle Fork American River confluence (OC1);
- Canyon Creek directly upstream from Middle Fork American River confluence (CC1);
- Long Canyon Creek downstream from the North-South Long Canyon Creek confluence (LC2);
- Long Canyon Creek upstream from Wallace Canyon Creek confluence (LC3);
- Wallace Canyon Creek upstream from Long Canyon Creek confluence (WC1);
- South Fork Rubicon River upstream from Rubicon River confluence (SF1);
- Rubicon River downstream from the Long Canyon Creek confluence (RR9); and
- Rubicon River approximately midway between Hell Hole Dam and South Fork Rubicon River confluence (RR10).

Accessibility Assessment. PCWA will continue to assess the possibility of accessing five remote locations in the Middle Fork American River and Rubicon River basins, identified as follows:

- Duncan Canyon Creek upstream from the Middle Fork American River (DC3);
- Middle Fork American River upstream from Duncan Canyon Creek confluence (MF11);
- Middle Fork American River approximately midway between Interbay Dam and Ralston Afterbay (MF13);
- Rubicon River between the South Fork Rubicon River and Pilot Creek (RR7); and
- Rubicon River near the Big Grizzly Canyon Creek confluence (RR11).

PCWA will install temperature monitoring stations at these five locations provided that the sites can be safely accessed.

Reinstallation of Existing Temperature Loggers. The pilot program data indicates that some of the existing temperature monitors should be moved or reinstalled because they were vandalized or are recording erroneous data. Therefore, PCWA will reinstall monitors NL1, SL1, MF5, and NF1.

Redundant Water Temperature Loggers. PCWA will install redundant water temperature loggers at all of the existing and proposed water temperature monitoring locations. The purpose of installing redundant water temperature loggers is twofold. First, redundant loggers will minimize the probability that water temperature data at any particular site will be lost due to data logger or optic shuttle malfunction, computer download failure or malfunction, vandalism or logger displacement. Each of the sites identified for monitoring is important for achieving the objectives of the water temperature-monitoring program and loss of data from any one site restricts characterization of water temperatures and potential analyses or data applications.

Second, redundant loggers will help to identify possible compromises in the accuracy of the water temperature data collected due to potential logger measurement drift or localized instream heating or cooling, as may have occurred at SL1 (see Appendix B). Redundant data loggers will help ensure that good water temperature data are available for future aquatic resources analyses.

A non-descript installation will be used for the redundant water temperature loggers. A metal box or pipe requiring specialized instrumentation (such as a key or wrench) to open will be used to house the logger. This box or pipe can be secured to a tree trunk or large boulder using a rubber coated steel cable. PCWA has successfully installed water temperature loggers using this application.

Data Collection Methodology

Consistent collection of the water temperature data is important to minimizing the potential for data gaps (missing data points in the continuous record). Because the loggers have the capacity to hold over 300 days of water temperature data collected at 15-minute intervals, a larger concern than running out of memory is the loss of data due to vandalism, logger malfunction or logger loss.

Water temperature loggers will be visited and data downloaded either twice per year, three times per year, or monthly from approximately June² through mid-October, depending on the logger location and weather conditions. If deemed necessary, some loggers may be downloaded more frequently. Loggers that are more subject to vandalism due to accessibility and public exposure, such as NF1, NF2, MF6, MF8, and NM1, will be visited monthly during the June through October period. Should a logger not listed above be vandalized, it then would be downloaded under this schedule, as well. High country loggers, those subject to being snowbound or inaccessible due to high spring flows or requiring difficult access, such as DC1, DC2, MF1, MF2, FL1, RR1, RR2, RR3, RR5, and RR6, will be downloaded as soon as possible during the spring and again prior to winter storms (mid-October). MF1 is located in a relatively accessible location and therefore will be checked more frequently, depending upon weather conditions. Because warm summer water temperatures are a potential biological concern, data collection will focus on obtaining summer water temperature data and ensuring the loggers are operating properly during the summer. The sites that are to be visited three times per year will be downloaded during June, August and mid-October. Table 4-1 provides descriptions of the download frequencies for the all of the current and proposed individual monitoring stations.

During the time the data is downloaded from the logger, air and water temperature measurements, the depth of the water temperature logger, and other observations will be noted on the data download data sheet. After the logger is removed from the water, it will be gently cleaned and visually inspected. The data will be downloaded into an optic shuttle and then later to a personal computer.

The equipment necessary to replace or fix an installation will be in the possession of the technicians downloading the data. Should a logger need to be replaced because of failure or vandalism, the technicians will be able to do so immediately to reduce the potential for additional data loss. Any loggers or optic shuttles that fail to download will be returned to Onset Corporation, where trained technicians can attempt to download the data.

² PCWA intends to download the water temperature data as early as possible during the spring. This year high streamflow, late season snow, and other logistical prohibitions (e.g., finalizing proposed water temperature monitoring sites and identifying access) prevented the water temperature data from being downloaded in April or May. In the future, PCWA plans to download the data as early in the spring as possible following the spring snowmelt runoff.

Immediately after the raw water temperature data files are safely downloaded to the computer, back-ups will be recorded on two CDs that will be stored in two different locations. Only after the raw water temperature data is safely backed-up will the optic shuttle be cleared or data manipulated.

Data Quality Assurance/Quality Control

Data QA/QC commences prior to downloading the data from each logger. A NIST-traceable digital thermometer will be used to determine the water temperature at the logger prior to data download. The water temperature reading from the NIST-traceable thermometer will then be compared to the last logger reading to evaluate potential accuracy drift of the logger. To minimize the potential for error in data collection, care will be taken to record the exact time that: 1) the water temperature is recorded with the thermometer; 2) the temperature logger is removed from the water; 3) the data begins downloading; 4) the data finishes downloading; and 5) the logger is re-deployed.

After the data is downloaded, reviewing water temperature data for errors prior to analysis is important. Water temperature data downloaded from each monitoring location will be viewed graphically as soon as possible to check for errors. Plotting the data period of record allows the data set to be scrutinized for anomalous or incorrect segments. Common anomalies in water temperature data include air temperature values (extreme spikes on the graphs) recorded prior to placement into water and after removal from water, and sudden changes in the magnitude of the daily temperature ranges. Values that are determined to be anomalous will be removed from the database. The raw data files will be retained in their unaltered state for future reference.

Data Analysis Procedures

Following QA/QC, an Excel macro program will then be applied to the 15-minute interval data that calculates daily average, maximum, and minimum water temperature, variance and standard error of the daily average water temperature, and time of daily maximum and daily minimum water temperatures. As well as providing valuable information regarding the water temperature regimes of the streams monitored, review of the variance, standard error, and time of daily maximum and minimum water temperature provides a second tier of QA/QC. For example, if the daily maximum water temperature in August is observed at 0800, then that would suggest logger malfunction, vandalism or tampering, or some other abnormality, which should be further investigated. The daily average water temperature and range for each monitoring site will then be plotted similarly to the plots presented in Appendix B. Stream system plots, such as those presented in Appendix B for the Middle Fork American River, the Rubicon River, Long Canyon Creek and Duncan Canyon Creek also will be prepared. Furthermore, the data collected will be available for use in other yet-to-be identified analyses and characterizations of aquatic resource habitat availability.

4.4.2 RESERVOIR WATER TEMPERATURE PROFILING

PCWA measured water temperature, dissolved oxygen and specific conductance at Hell Hole and French Meadows reservoirs during the pilot program implemented during the fall of 2004. A description of this effort and the resultant data profiles are provided in Appendix B.

PCWA will continue to measure water temperature, dissolved oxygen and specific conductance at French Meadows and Hell Hole reservoirs during 2005 and 2006. Pursuant to the request of the resource agencies, PCWA also will conduct reservoir profiling in Ralston Afterbay Reservoir during mid-July, mid-August, and possibly during September through November pending the results of the July and August sampling efforts. Additionally, continuously recording, stationary water temperature loggers will be placed at up to six strategically located sites in Ralston Afterbay to collect reservoir margin water temperature data. These loggers will be installed in July and will be operated through September and all stream water temperature data collection protocols and methods will be followed. The reservoir profiling effort is summarized in Table 4-2.

The other Project impoundments (Middle Fork Interbay, Duncan Diversion Dam, North Fork Long Canyon Dam and South Fork Long Canyon Dam) are believed to be too small and have insufficient water residence time to stratify and, therefore, will not be profiled. Continuous water temperature data will continue to be collected upstream and downstream from these impoundments in the stream monitoring element of this Study Plan.

The reservoir sampling protocol implemented during 2004 at French Meadows and Hell Hole reservoirs proved to be robust and repeatable, and will be followed again in 2005. Should the examination of 2005 data suggest there is little difference longitudinally in the thermal structures within these reservoirs (e.g., if FM1, FM2, and FM3 profiles are similar), as was illustrated by the limited sample data from 2004, then reservoir profiling may be reduced to one or two locations each in French Meadows and Hell Hole reservoirs in 2006, pending consultation with the resource agencies.

Data Collection Methodology

Water temperature profiling will continue at French Meadows and Hell Hole reservoirs at each of the previously identified and sampled sites (FM1, FM2, FM3, HH1, HH2, and HH3) (Appendix B, Figures 3 and 4). A GPS receiver will be used during each successive sampling occasion to locate the geographical coordinates of each sample site. A single location near the Ralston Afterbay Dam will be identified and sampled for the Ralston Afterbay Reservoir profiling activities.

A Hydrolab® Quanta® multi-parameter water quality monitoring system will be used to measure water temperature (± 0.2 degrees Celsius ($^{\circ}\text{C}$)), dissolved oxygen (± 0.2 milligrams per liter (mg/l)) and specific conductance (± 0.001 millisiemens (mS/cm)) at each of the reservoir sampling sites. Specific conductance will be calibrated prior to entering the field and dissolved oxygen will be calibrated at each reservoir following the manufacturer's calibration protocols. Temperature does not need to be calibrated.

Table 4-2. Current and Proposed Reservoir Profile Locations Associated with the MFP, and the Proposed Parameters Measured and Sampling Frequency.

Line #	Reservoir	Description of Location	Station ID	Date Initiated, and To Be Resumed	Parameters Measured	Sampling Frequency
1	French Meadows Reservoir	Former stream channel near French Meadows Dam	FM1	September 2004, Mid June 2005	Water Temperature, Dissolved Oxygen, Specific Conductance	Monthly through reservoir destratification
2	French Meadows Reservoir	Former stream channel near the middle of reservoir	FM2	September 2004, Mid June 2005	Water Temperature, Dissolved Oxygen, Specific Conductance	Monthly through reservoir destratification
3	French Meadows Reservoir	Former stream channel near the upstream end of reservoir	FM3	September 2004, Mid June 2005	Water Temperature, Dissolved Oxygen, Specific Conductance	Monthly through reservoir destratification
4	Hell Hole Reservoir	Former stream channel near Hell Hole Dam	HH1	September 2004, Mid June 2005	Water Temperature, Dissolved Oxygen, Specific Conductance	Monthly through reservoir destratification
5	Hell Hole Reservoir	Former stream channel near the middle of reservoir	HH2	September 2004, Mid June 2005	Water Temperature, Dissolved Oxygen, Specific Conductance	Monthly through reservoir destratification
6	Hell Hole Reservoir	Former stream channel near the upstream end of reservoir	HH3	September 2004, Mid June 2005	Water Temperature, Dissolved Oxygen, Specific Conductance	Monthly through reservoir destratification
7	Ralston Afterbay Reservoir	Approximately deepest point of reservoir near Ralston Afterbay Dam	RA1	Mid July 2005	Water Temperature, Dissolved Oxygen, Specific Conductance	Mid July, Mid August, through November pending results

Information collected at each site on each sampling occasion will include:

- General description of the weather;
- Start and end time of data collection;
- Air temperature at the start and end time of data collection;
- Maximum water depth observed using the sonar; and
- Additional general comments regarding the data collection process.

Generally, measurements will be taken at 1-meter (m) vertical increments beginning just beneath the water surface until the thermocline is reached, at which point measurements will be taken at 2-m increments. At each sample depth, the parameter readings will be allowed to stabilize, which usually takes between 15 and 60 seconds, before the water temperature, dissolved oxygen and specific conductance values are recorded on the data sheet. Readings are taken at each site until the sample depth approximates the depth reading on the sonar or the specific conductance reading rapidly increases (which is usually accompanied by a rapid decrease in dissolved oxygen concentration), indicating that the multi-parameter probe is at the bottom of the reservoir.

It is anticipated that reservoir profiles in French Meadows and Hell Hole reservoirs will be taken approximately monthly beginning in the spring as soon as access to reservoirs is possible, and ending in the fall when the reservoirs thermally destratify (i.e., are isothermal), or when access is prohibited due to weather. The Ralston Afterbay will be profiled during mid-July and mid-August. Should the data collected during these sampling times indicate that stratification occurs in Ralston Afterbay, profiling activities would be continued monthly until November or until the reservoir destratifies. Similarly, the monitoring of edgewater water temperature conditions will be extended until November in 2005 and from April through November 2006 if the Afterbay does thermally stratify.

Data Quality Assurance/Quality Control

As during the 2004 reservoir profiling, all manufacturer's protocols will be followed for calibrating and utilizing the Hydrolab® Quanta®. A NIST-traceable digital thermometer will be utilized to determine surface water temperature, which will be compared to the reading provided by the multi-parameter probe to provide a measure of instrument accuracy. Careful notes will be taken on the environmental conditions experienced while collecting the reservoir profile data that might affect data collection, such as strong winds, extreme air temperatures or storms.

Hand-written data collected on field data sheets will be entered into an electronic database. After the data is entered into the database, it will be reviewed for accuracy. The data will then be plotted to provide an additional means of QA/QC. When the data in the electronic database is determined to be correct, the database will be recorded onto two CDs and stored in two different locations.

Data Analysis Procedures

Water temperature profile data will be plotted and examined for relationships among reservoirs, sample sites, depths, water temperatures and seasons. Additional plots will be created to illustrate the seasonal changes in the thermal profiles of each reservoir. Reservoir water temperature data will also be compared to stream water temperature data collected from tributaries flowing into the reservoirs, and reservoir release water temperatures to identify potential relationships among these sites. Furthermore, the data collected will be available for use in other yet-to-be identified analyses and characterizations of aquatic resources habitat availability.

4.4.3 METEOROLOGICAL DATA

PCWA will expand upon the meteorological monitoring that began in 2004. Relative humidity and air temperature will continue to be monitored in association with the water temperature monitoring program, however some of the existing stations will be replaced or upgraded to monitor additional meteorological parameters. Specifically, loggers measuring air temperature and relative humidity at Ralston Afterbay Reservoir (OA1) and Middle Fork Interbay (IA1) will be replaced with MET stations (station IDs: RAB and IBR, respectively) capable of measuring six parameters: wind speed; wind direction; relative humidity; air temperature; solar radiation; and precipitation. The USFS MET station at Hell Hole (HLH), which monitored wind speed, wind direction, relative humidity, air temperature, and precipitation through 2004, and the PCWA logger monitoring air temperature and relative humidity at Hell Hole Reservoir (HA1) will be replaced with a MET station (HLL) near Hell Hole Reservoir. Table 4-3 summarizes information related to each of the four stations that will be replaced.

With these upgrades, the meteorological monitoring array would consist of nine stations strategically located in the vicinity of the MFP. Stations FA1, NA1, and RA1 will continue to monitor air temperature and relative humidity at French Meadows Dam, North Fork American River at the Auburn State Recreation Headquarters, and at Ellicott Bridge on the Rubicon River, respectively. Stations RAB, IBR, HLL, DUN (the USFS MET station in upper Duncan Canyon) will monitor wind speed, wind direction, relative humidity, air temperature, solar radiation, and precipitation at Ralston Afterbay Reservoir, Middle Fork Interbay, Hell Hole Reservoir, and Upper Duncan Canyon, respectively. Air temperature and precipitation will be monitored at USBR sites in the Duncan Canyon Creek watershed at Greek Store (GKS) and at Georgetown (GTW). Figure 4-2 shows the existing and proposed meteorological station array. Table 4-4 provides additional information about each station, including parameters to be measured, operational status and download frequency.

Table 4-3. Existing Air Temperature/Relative Humidity Stations that will be Replaced by New, Upgraded Meteorological Sites.

Basin	Description of Location	Station ID	Date Installed	Parameters Measured	Status	Download Frequency
MF American	Oxbow Dam	OA1	August 16, 2004	Relative Humidity, Air Temperature	To be replaced by RAB	NA
Rubicon	Hell Hole Reservoir (USFS)	HLH	1995	Relative Humidity, Air Temperature, Precipitation, Solar Radiation, Wind Speed and Wind Direction	To be replaced by HLL	NA
MF American	Middle Fork Powerhouse	IA1	August 17, 2004	Relative Humidity, Air Temperature	To be replaced by IBR	NA
Rubicon	PCWA Hell Hole Dormitory	HA1	August 17, 2004	Relative Humidity, Air Temperature	To be replaced by HLL	NA

Placeholder for Figure 4-2

Figure 4-2 Meteorological Station Map

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

Table 4-4. Current and Proposed Meteorological Monitoring Locations Associated with the MFP, and their Installation Dates, Status, and Proposed Download Frequencies.

Line #	Basin	Description of Location	Station ID	Date Installed or to be installed	Parameters Measured	Status	Download Frequency
Meteorological Stations or Air temperature Humidity Monitoring Sites to be Maintained							
1	Duncan	Greek Store (USBR)	GKS	1995	Precipitation, Air Temperature	Operable	Real-Time
2	Duncan	Duncan (USFS)	DUN	2001	Relative Humidity, Air Temperature, Precipitation, Solar Radiation, Wind Speed, and Wind Direction	Operable	Real-Time
3	MF American	Georgetown (USBR)	GTW	1996	Precipitation, Air Temperature	Operable	Real-Time
4	NF American	Auburn State Recreation Headquarters, El Dorado St., Auburn CA	NA1	August 31, 2004	Relative Humidity, Air Temperature	Operable	Jun, Aug, and Oct
5	MF American	French Meadows Reservoir	FA1	August 17, 2004	Relative Humidity, Air Temperature	Operable	Jun, Aug, and Oct
6	Rubicon	South side of Ellicott Bridge, Rubicon R.	RA1	August 25, 2004	Relative Humidity, Air Temperature	Operable	Jun, Aug, and Oct
Meteorological Stations to be Installed							
7	MF American	Ralston Afterbay Reservoir	RAB	June 2005	Relative Humidity, Air Temperature, Precipitation, Solar Radiation, Wind Speed, and Wind Direction	To be installed	Jun, Aug, and Oct
8	MF American	Middle Fork Interbay	IBR	June 2005	Relative Humidity, Air Temperature, Precipitation, Solar Radiation, Wind Speed, and Wind Direction	To be installed	Jun, Aug, and Oct
9	Rubicon	Hell Hole Reservoir	HLL	June 2005	Relative Humidity, Air Temperature, Precipitation, Solar Radiation, Wind Speed and Wind Direction	To be installed	Jun, Aug, and Oct

Data collected at meteorological stations installed and maintained by PCWA (RAB, IBR, HLL, RA1, NA1, and RA1) will be downloaded in June, August, and October. The procedures for data retrieval will be similar to those used for the stream water temperature data retrieval described in Section 4.4.1 of this Study Plan. Data from the three stations operated by the USBR and/or USFS, Duncan (DUN), Greek Store (GKS) and Georgetown (GTW), will be downloaded quarterly from CDEC. Data QA/QC and analysis procedures will be similar to those identified for stream water temperature monitoring. A meteorological data summary report will be prepared and incorporated into the stream water temperature summary reports.

4.5 REPORTING

Data summary reports will be prepared following the fall download of water temperature data and the end of the reservoir profiling season. The summary reports will briefly summarize the data collected and the status of the monitoring programs. The reports will integrate the data collected to date, including meteorological data, and provide recommendations or modifications to the stream and reservoir water temperature monitoring programs, if appropriate. As requested by the resource agencies, water temperature data will be accompanied by streamflow data, where data are available. The summary reports will be submitted to the resource agencies for review and comment once in January 2006 and again in January 2007.

4.6 SCHEDULE MILESTONES

The water temperature study will be implemented in accordance with the milestones shown below. Note that the schedule is dependent upon access conditions, weather conditions, and river flow. PCWA will notify the agencies of any substantial changes to the implementation schedule, should they occur.

Stream Water Temperature Monitoring Program

Date	Milestone
Jun 2005	Install redundant and missing water temperature loggers; begin spring download of all water temperature loggers; QA/QC downloaded water temperature data.
Jul 2005	Complete download of monthly visited water temperature loggers; QA/QC downloaded water temperature data.
Aug 2005	Download of sites visited quarterly and monthly; QA/QC downloaded water temperature data.
Sep 2005	Download of sites visited monthly; QA/QC downloaded water temperature data.
Oct 2005	Commence and complete download of all water temperature loggers; QA/QC downloaded water temperature data.
Nov 2005	Complete data QA/QC; begin preparation of 2005 stream water temperature data summary report.
Jan 2006	Submit 2005 stream water temperature data summary report to resource agencies.
Mar 2006	Determine whether additional stream water temperature monitoring locations are necessary to achieve program objectives.
Apr 2006	Repeat 2005 Program with appropriate modifications.
Jan 2007	Submit 2006 stream water temperature data summary report to resource agencies.

Reservoir Water Temperature Profiling Program

Date	Milestone
Jun 2005	Commence monthly reservoir profiling on French Meadows Reservoir and Hell Hole Reservoir.
Mid-Jul	Conduct Ralston Afterbay Reservoir profiling; install Ralston Afterbay margin water temperature loggers.
Mid-Aug	Conduct Ralston Afterbay Reservoir profiling; download Ralston Afterbay margin water temperature loggers; QA/QC downloaded water temperature data.
Mid-Sep	Download and remove Ralston Afterbay margin water temperature loggers; QA/QC downloaded water temperature data.
Nov 2005	Complete monthly reservoir profiling on French Meadows Reservoir and Hell Hole Reservoir for the season.
Dec 2005	QA/QC reservoir profile database and prepare data plots.
Jan 2006	Prepare and submit 2005 reservoir water temperature profile data summary report to resource agencies; prepare and submit Ralston Afterbay margin water temperature data summary report to resource agencies.
Mar 2006	Determine whether additional year of reservoir profile data collection is necessary to achieve program objectives.
Apr 2006	Commence 2006 reservoir water temperature profiling program.
Jan 2007	Submit 2006 reservoir water temperature profile summary reports to resource agencies.

Meteorological Data Monitoring Program

Date	Milestone
Jun 2005	Install MET stations at Ralston Afterbay Reservoir, Middle Fork Interbay, and Hell Hole Reservoir; download data from six pilot program air temperature/relative humidity monitoring sites; QA/QC downloaded data.
Aug 2005	Download data from six quarterly visited MET/air temperature/relative humidity monitoring sites; download data from three real-time sites from CDEC; QA/QC downloaded data.
Oct 2005	Download data from six quarterly visited MET/air temperature/relative humidity monitoring sites; download data from three real-time sites from CDEC; QA/QC downloaded data.
Nov 2005	Prepare MET data for inclusion in stream water temperature data summary report.
Jan 2006	Download data from three real-time sites from CDEC; QA/QC downloaded data; submit 2005 stream water temperature data summary report, including summary of MET data, to resource agencies for review and comment.
Mar 2006	Determine whether additional MET monitoring locations are necessary to achieve program objectives.
Apr 2006	Repeat 2005 Program with appropriate modifications.
Jan 2007	Submit 2006 stream water temperature data summary report, including MET data summary, to resource agencies.

4.7 REFERENCES

The following references were used to develop the Water Temperature Study Plan and are available for review by the public and resource agencies from PCWA.

California Regional Water Quality Control Board. 1998. Water quality control plan (Basin Plan) for the Sacramento River and San Joaquin River Basins.

Placer County Water Agency (PCWA). 2003. Water Temperature Monitoring Station Installation, PCWA Middle Fork Project, Draft Report, December 2003. Prepared by Surface Water Resources, Inc. (SWRI).

PCWA. 2004. Water Temperature Monitoring Station Installation, PCWA Middle Fork Project, Addendum, October 2004. Prepared by Surface Water Resources, Inc. (SWRI).

5.0 HYDROLOGY STUDY PLAN

5.1 INTRODUCTION

A substantial amount of hydrologic data is available for the streams, rivers and reservoirs in the vicinity of the MFP. PCWA has been assembling, compiling, and reviewing these data in preparation for the relicensing of the MFP. This Hydrology Study Plan (Study Plan) describes the type of hydrologic data currently available for the streams and rivers in the vicinity of the MFP and the analyses proposed for completion during early relicensing activities. During the implementation period, PCWA will periodically meet with the resource agencies to discuss progress, analytical and estimating procedures, and any proposed modifications to the study design. A report summarizing the study results will be prepared and provided to the resource agencies in early 2006 for review and comment. PCWA recognizes that additional hydrologic analyses may be required during the course of relicensing. Future analyses will be adjusted and refined based on the 2005 study results and resource agency comments.

5.2 STUDY OBJECTIVES

The objectives of the Hydrology Study Plan are:

- Assemble the existing hydrologic data available in the Project vicinity into a comprehensive database;
- Install or reinstall up to eight new flow gages, pending an access investigation. The data collected from these gages would be used to augment the existing hydrologic data set;
- Select a preliminary water-year type classification for the watershed, in consultation with the resource agencies;
- Select the period of record for analysis of Project and unimpaired hydrology;
- Describe the Project and unimpaired hydrology through a series of hydrologic analyses;
- Perform an Indicators of Hydrologic Alteration Analysis (IHA);
- Determine if additional data are needed to support the upcoming relicensing;
- Provide a complete hydrologic data set and corresponding analyses to support the geomorphology, riparian and aquatic habitat, and water temperature studies described in this package.

5.3 GENERAL APPROACH

The first task of the Hydrology Study Plan is to assemble the existing hydrologic data in the Project vicinity and develop a complete database. Once the dataset is complete it will be analyzed and developed into both Project and unimpaired flow records. Magnitude, timing, duration, rate of change and frequency of flows will be described with hydrographs and exceedance tables. Time-scales will be those allowed by the

existing data. This will generally be in daily, monthly, hourly, or 15-minute increments. In addition, PCWA will perform an Indicator of Hydrologic Alteration (IHA) analysis using streamflow data for gages with at least 25 years of data. The daily streamflow data also will be used to reconstruct the unregulated hydrology at sites selected in consultation with the resource agencies.

Development of accurate hydrology information is a key component to the successful evaluation of any water resources system. Developing a hydrology dataset that is suitable for evaluating a system is a multi-step process that begins with collecting stream and reservoir gage data. Fortunately, there are several existing gages in the Middle Fork Project area and vicinity. In addition, PCWA will install or reinstall up to eight new continuous recording gages, pending an access investigation. However, even with numerous gages, there may be data gaps. For example, the period of record may not be the same for all the gages. The challenge is to take the data that is available, identify data gaps, and determine how best to estimate the missing data. For areas with limited data or no data, hydrologic analysis will be augmented using comparison to similar-sized, nearby subwatersheds, precipitation estimates, or other hydrologic techniques to be determined in consultation with the resource agencies.

5.4 STUDY METHODS

5.4.1 COLLECTING AND COMPILING EXISTING STREAM FLOW AND STORAGE DATA

The existing network of stream gaging stations will initially be used to describe the surface water hydrology in streams and rivers upstream and downstream of the MFP dams and reservoirs. Flow measurements have been recorded and published by the USGS from at least 47 locations within the Middle Fork American River basin. These locations are identified in Table 5-1 for reference. Most of these locations include gages that measure flow in the tributaries of the American River. However, some of the gages measure diversions from streams or flow through power plants. The locations of the known gages are shown on Figure 5-1 and on the large format map included in Appendix C. All of these data will be useful for developing and analyzing Project and unimpaired flow conditions in the Middle Fork American River and its tributaries.

PCWA and a number of other agencies also collect flow data in the American River Basin but these data are not necessarily transmitted to and published by the USGS. These agencies include: the SMUD, Georgetown Public Utility District (GDPUD), Foresthill Public Utility District (FPUD), and other state or federal agencies. PCWA has contacted these agencies to inquire about obtaining their unpublished data. These data will be subject to a rigorous quality control review prior to inclusion in any analysis.

Ten dams/reservoirs are present in the area of investigation that may significantly alter the timing and magnitude of natural flow in the South Fork Rubicon River, Rubicon River, Middle Fork American River and the North Fork American River. These reservoirs are identified on Table 5-2 and are shown on Figure 5-1, for reference.

Table 5-1. USGS Gaging Stations (Middle- and North-Fork American Rivers).

Map No.	Site Number	Site Name	Latitude (NAD27)	Longitude (NAD27)	Drainage Area (mi ²)	Elevation (ft above MSL NGVD29)	Beginning Record Date	End Record Date
1	11426190	LAKE VALLEY CN NR EMIGRANT GAP CA	39°17'56"	120°38'31"	--	--	10/1/1964	Current
2	11426400	N. SHIRTAIL C NR DUTCH FLAT CA	39°07'49"	120°47'44"	9.1	--	10/1/1964	9/30/1985
3	11426500	NF AMERICAN R NR COLFAX CA	39°59'20"	120°13'20"	308.0	897	10/1/1911	9/30/1941
4	11427000	NF AMERICAN R A NORTH FORK DAM CA	38°56'10"	121°01'22"	342.0	715	10/1/1941	Current
5	11427200	FRENCH MEADOWS PP NR MEEKS BAY C CA	39°04'42"	120°24'27"	--	--	10/1/1970	Current
6	11427500	MF AMERICAN R A FRENCH MEADOWS CA	39°06'35"	120°28'49"	47.9	4920	10/1/1951	Current
7	11427700	DUNCAN CYN C NR FRENCH MEADOWS CA	39°08'09"	120°28'39"	9.9	5270	9/1/1960	Current
8	11427750	DUNCAN CYN C BL DIV DAM NR FRENCH MEADOWS CA	39°07'59"	120°28'58"	10.5	5210	10/1/1964	Current
9	11427760	MF AMERICAN R AB MF PH NR FORESTHILL CA	39°01'31"	120°35'40"	87.8	2540	9/1/1965	Current
10	11427765	RALSTON PH NR FORESTHILL CA	39°00'01"	120°43'23"	--	--	10/1/1973	Current
11	11427770	MF AMERICAN R BL INTERBAY DAM NR FORESTHILL CA	39°01'35"	120°36'09"	89.1	2470	10/1/1965	Current
12	11427940	RUBICON-ROCKBOUND TUNNEL NR MEEKS BAY CA	38°59'16"	120°13'29"	--	6533	10/1/1963	Current
13	11427960	RUBICON R BL RUBICON LK CA	38°59'20"	120°13'20"	26.8	--	2/27/1991	Current
14	11428000	RUBICON R A RUBICON SPRINGS NR MEEKS BAY CA	39°01'10"	120°14'46"	31.4	6053	2/1/1910	9/30/1986
15	11428001	COMBINED RUBICON R-ROCKBOUND TUNNEL CA	39°01'10"	120°14'46"	31.4	--	1/1/1964	9/30/1983
16	11428300	BUCK-LOON TUNNEL NR MEEKS BAY CA	39°00'17"	120°15'21"	--	6425	10/1/1963	Current
17	11428400	L RUBICON R BL BUCK ISLAND DAM CA	39°00'20"	120°15'20"	6.0	--	10/24/1984	Current
18	11428600	MF PH NR FORESTHILL CA	39°01'30"	120°35'43"	--	--	10/1/1974	Current
19	11428800	RUBICON R BL HELL HOLE DAM CA	39°03'24"	120°24'25"	114.0	4232	11/6/1965	Current
20	11429000	SF RUBICON R A SM NR QUINTETTE CA	38°56'54"	120°23'57"	16.1	--	2/1/1910	6/30/1914
21	11429300	ROBBS PEAK PH NR KYBURZ CA	38°53'50"	120°22'38"	--	4880	10/1/1962	Current
22	11429340	LOON LK PH NR MEEKS BAY CA	38°58'57"	120°19'27"	--		10/1/1974	Current
23	11429500	GERLE C BL LOON LK NR MEEKS BAY CA	39°00'20"	120°18'52"	8.0	6250	9/1/1962	Current
24	11429800	ROBBS PEAK TU NR RIVERTON CA	38°54'12"	120°22'18"	--	--	10/1/1962	9/30/1967
25	11430000	SF RUBICON R BL GERLE C NR GEORGETOWN CA	38°57'17"	120°24'02"	47.6	4970	8/1/1961	Current
26	11430500	SF RUBICON R A MOUTH NR GEORGETOWN CA	38°58'05"	120°27'55"	56.9	--	7/27/1956	9/30/1962
27	11431000	RUBICON R NR GEORGETOWN CA	38°57'30"	120°29'05"	195.0		4/1/1910	11/30/1964

Table 5-1. USGS Gaging Stations (Middle- and North-Fork American Rivers) (continued).

Map No.	Site Number	Site Name	Latitude (NAD27)	Longitude (NAD27)	Drainage Area (mi ²)	Elevation (ft above MSL NGVD29)	Beginning Record Date	End Record Date
28	11431500	GEORGETOWN DIVIDE DITCH ABOVE PILOT CREEK	38°56'18"	120°28'42"	--	3350	10/1/1950	12/31/1961
29	11431800	PILOT C AB STUMPY MEADOWS RES CA	38°53'41"	120°35'02"	11.7		10/1/1960	Current
30	11432000	GEORGETOWN DIVIDE DITCH NR GEORGETOWN CA	38°54'12"	120°36'12"	--	4280	3/29/1947	9/30/1960
31	11432500	PILOT C NR GEORGETOWN CA	38°54'14"	120°36'11"	15.1		4/1/1946	9/30/1960
32	11433040	PILOT C BL MUTTON CANYON NR GEORGETOWN CA	38°55'25"	120°38'27"	21.1	4120	7/1/1961	Current
33	11433060	SF LONG CANYON C DIV TUNNEL NR VOLCANOVILLE CA	39°03'04"	120°28'14"	--	3760	10/1/1965	Current
34	11433065	SF LONG CYN C F REL BL DIV TU NR VOLCANOVILLE CA	39°03'04"	120°28'14"	--	4630	11/27/1988	Current
35	11433080	NF LONG CANYON C DIV TU NR VOLCANOVILLE CA	39°02'57"	120°28'56"	--	4630	10/1/1965	Current
36	11433085	NF LONG CYN C F REL BL DIV TU NR VOLCANOVILLE CA	39°02'57"	120°28'56"	--	4700	11/26/1988	Current
37	11433100	LONG CANYON C NR FRENCH MEADOWS CA	39°01'16"	120°30'53"	18.0	4700	9/1/1960	9/30/1992
38	11433200	RUBICON R NR FORESTHILL CA	38°59'33"	120°43'14"	315.0	1362	10/1/1958	9/30/1984
39	11433212	OXBOW PH NR FORESTHILL CA	39°00'14"	120°44'44"	--	--	10/1/1973	Current
40	11433260	NF OF MF AMERICAN R NR FORESTHILL CA	39°01'27"	120°43'03"	88.9	--	8/1/1965	9/30/1985
41	11433300	MF AMERICAN R NR FORESTHILL CA	39°00'22"	120°45'35"	524.00	1070	10/1/1958	Current
42	11433400	CANYON C NR GEORGETOWN CA	38°56'03	120°52'21"	12.5	--	7/1/1966	10/10/1979
43	11433420	MAINE BAR CANYON C NR GREENWOOD CA	38°55'34"	120°56'51"	0.8	--	10/1/1972	9/30/1986
44	11433500	MF AMERICAN R NR AUBURN CA	38°55'05"	121°00'51"	614.0	552	10/1/1911	1/31/1986
45	11433799	COMB FLOW N FK AMERICAN R + M FK AMERICAN CA	38°52'20"	121°03'18"	--	--	10/1/1973	9/30/1981
46	11433800	NF AMERICAN R BL AUBURN DAMSITE NR AUBURN CA	38°52'20"	121°03'18"	973.0	--	5/11/1972	2/6/1986
47	11434000	NF AMERICAN R A RATTLESNAKE BAR CA	38°48'50"	121°05'35"	996.0	344	10/1/1930	3/31/1955

Placeholder for Figure 5-1

Figure 5-1 Hydrology Map

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

Table 5-2
Other Dams and Reservoirs in the Area of Investigation

#	Reservoir Name	Owner	Capacity/ Acre Feet	USGS	CDEC
1	Loon Lake Reservoir	SMUD	76,200	X	X
2	Gerle Reservoir	SMUD	1,200	X	X
3	French Meadows Reservoir	PCWA	136,400	X	X
4	Hell Hole Reservoir	PCWA	207,600	X	X
5	Lake Valley Reservoir	PG&E	7,960	X	X
6	Stumpy Meadows Reservoir	GDPUD	20,000		X
7	Buck Island Reservoir	SMUD	1,070		X
8	Rubicon Reservoir	SMUD	1,450		X
9	Sugar Pine Reservoir	FPUD	6,291		
10	Ralston Afterbay	PCWA	2,732		

As indicated, the USGS publishes storage data for five of the ten reservoirs. The California Data Exchange Center (CDEC) has data for all but Sugar Pine Reservoir. Of the data available at CDEC, all but Stumpy Meadows are available on a daily basis. Stumpy Meadows data is available on a monthly basis. CDEC data is not reviewed and should be considered provisional. The FPUD has provided PCWA with monthly data, hand written on paper log sheets for Sugar Pine Reservoir. Elevation records for Ralston Afterbay exist in PCWA's monthly operations logs. Originally the logs were type written, but since 1995 have been kept in an electronic spreadsheet.

PCWA has already collected and compiled some of the available flow and storage data in the Project vicinity and has uploaded the data to a web-based database. The database is currently available for agency review and can be accessed at <http://www.ecorphydro.com>. The web-site is currently operational but is still being developed. Eventually, the site will include a map, similar to Figure 5-1, of the gage locations with menu driven access to hydrology data PCWA develops as part of the relicensing process. The web site will also include report-generating capabilities, including downloadable, comma-delimited files for import to spreadsheets.

PCWA will collect and review additional data as part of this study including new provisional data and update the database as needed through 2010. Updated data will periodically be provided to the resource agencies. Upload frequency may be limited because the USGS data is only published annually. However, PCWA may be able to obtain data more frequently, directly from the individual agencies collecting the data. These data would be marked as preliminary and provisional, and would be replaced as data from the USGS becomes available. PCWA plans to complete all of the technical studies and analyses by 2009. As such, PCWA does not plan to reanalyze data or revise completed study reports using hydrology data generated in 2010.

Some of the existing gages only operate when diversions occur, for example the gages located at the North and South Fork Long Canyon Diversions. PCWA will attempt to

operate these gages year-round, if feasible, even when diversions are not occurring to help augment the hydrologic data set.

5.4.2 AUGMENTING THE EXISTING HYDROLOGIC DATA SET

Some of the gages in the area of investigation are no longer operational. In addition, there are presently no gages along certain reaches where flow data would be helpful. As such, PCWA will install or re-install up to eight new flow gages to augment the existing data set at the following locations, pending an access investigation:

- North Fork of the Middle Fork American River above Mosquito Ridge Road
- Middle Fork American River above Ralston Afterbay
- Rubicon River above Ralston Powerhouse
- Long Canyon Creek at the mouth
- Long Canyon Creek below the confluence of the North Fork and South Fork Long Canyon Creeks
- Duncan Creek above the confluence with the Middle Fork American River (pending access investigation)
- South Fork Rubicon River at mouth (pending access investigation)
- Rubicon River below the confluence with the South Fork Rubicon River (pending access investigation)

PCWA will continue to consult with the resource agencies regarding access and the permit process related to the installation of new gages. In addition, PCWA will provide the resource agencies with the following information regarding each new gage that is installed:

- A description of the new stream gages including whether the gage will be operated permanently or during the relicensing process;
- Equipment specifications;
- Operating flow ranges;
- Calibration techniques;
- Data recording and retrieval methods;
- A description of the period (timing) of operation of each existing gage.

Analysis of hydrologic data will involve two primary components, developing unimpaired flows and utilizing the Project and unimpaired hydrologic data to conduct specific analyses. These components are described further in the following.

5.4.3 DEVELOPING UNIMPAIRED FLOWS

Unimpaired flows will be used in both the environmental studies and hydrologic analysis of the system. Unimpaired flows will be developed at a total of 34 different locations (also referred to as nodes), as agreed to with the resource agencies. The 34 unimpaired flow locations are identified below and are depicted on Figure 5-1 and on the large format map contained in Appendix C. Note that the USGS gage numbers are included in the description for reference, where applicable.

- A. North Fork American River below Auburn Dam Site near Auburn (11433800)
- B. Middle Fork American River at confluence with North Fork American (no gage number)
- C. North Fork American River at North Fork Dam (11427000)
- D. Canyon Creek at mouth (no gage number)
- E. Middle Fork American River at Canyon Creek (no gage number)
- F. Otter Creek at mouth (no gage number)
- G. Middle Fork American River at Otter Creek (no gage number)
- H. Middle Fork American River at unnamed tributary below Oxbow PH (no gage number)
- I. North Fork of Middle Fork American River above Mosquito Ridge Rd. (11433260/ gage to be reinstalled)
- J. Middle Fork American River above Ralston Afterbay (no gage number, gage to be installed)
- K. Rubicon River above Ralston Afterbay (11433200/ gage to be reinstalled)
- L. Middle Fork American River at unnamed tributary between Ralston Afterbay and Interbay Dam (no gage number)
- M. Middle Fork American River above Middle Fork powerhouse (11427760)
- N. Duncan Creek below diversion dam (11427750)
- O. Duncan Creek above confluence with Middle Fork American River (no gage number, gage to be reinstalled subject to access)
- P. Middle Fork American River at confluence with Duncan Creek (no gage number)
- Q. Middle Fork American River between French Meadows and Duncan Creek (no gage number)
- R. Middle Fork American River at French Meadows (11427500)
- S. North Fork Long Canyon Creek below diversion (11433085)
- T. South Fork Long Canyon Creek below diversion (11433065)
- U. Long Canyon Creek below confluence of North Fork & South Fork Long Canyon Creeks (11433100, gage to be reinstalled)
- V. Long Canyon Creek at Wallace Creek (no gage number)
- W. Wallace Creek at mouth (no gage number)
- X. Long Canyon Creek at mouth (no gage number, gage to be installed)
- Y. Rubicon River at confluence with Long Canyon Creek (no gage number)

- Z. Pilot Creek below Mutton Canyon (11433040)
- AA. Pilot Creek at mouth (no gage number)
- AB. Rubicon River at confluence with Pilot Creek (no gage number)
- AC. Rubicon River at unnamed tributary above Pilot Creek (no gage number)
- AD. Rubicon River between Pilot Creek and South Fork Rubicon River (no gage number)
- AE. Rubicon River below confluence with South Fork Rubicon River (11431000, gage to be reinstalled)
- AF. South Fork Rubicon River at mouth (11430500)
- AG. Rubicon River between Hell Hole Dam and South Fork Rubicon River (no gage number)
- AH. Rubicon River below Hell Hole Dam (11428800)

Methods for calculating unimpaired flows vary by the type of information available for the specified stream location. The basic principle is to remove the effects of man-made structures on stream flow. That process may be as simple as adding measured diversions to a stream gage below the diversion. Estimates where reservoirs are involved can include a more complex formula including change in storage plus outflow (releases, diversions, evaporation, leakage, etc). Records often include periods where data is missing. In those cases, correlations will be developed with other nearby gages to fill gaps in the data. If gaged data is not available, area, precipitation and/or elevation relationships can be developed with nearby unimpaired gages in watersheds of similar characteristics. Choosing a method depends on what data is available. The proposed list of unimpaired flow locations assumes sufficient data is available to develop estimates. If sufficient data is not available, PCWA will consult with the resource agencies to discuss alternative approaches.

Unimpaired Flow Data Available from SMUD

SMUD owns and operates the Upper American River Project (UARP) that includes facilities on the Rubicon River and its tributaries, upstream of some of the MFP facilities. As part of the data gathering process, PCWA reviewed the *Sacramento Municipal Utility District's Upper American River Project and Pacific Gas and Electric Company's Chili Bar Project Technical Report on Hydrology* dated April 2004. During the review, four key locations were identified that can be used in the development of unimpaired stream flows along the Rubicon River. Due to the complex operations of the UARP and SMUD's familiarity with the watershed, the unimpaired flow estimates are likely the best available. However, PCWA proposes to review SMUD's estimates of unimpaired flow and consult with the resource agencies to determine the suitability of including these estimates as part of an unimpaired flow analysis in the Rubicon River. Locations 1-4, below, are the four key locations in the Rubicon watershed where unimpaired flows were developed by SMUD.

- 1 Rubicon River below Rubicon Reservoir
- 2 Little Rubicon River below Buck Island Reservoir
- 3 Gerle Creek below Gerle Lake

4 South Fork Rubicon River above Rubicon River

5.4.4 DATA ANALYSIS

PCWA will perform a variety of hydrologic analyses for both Project and unimpaired flows. Important steps in the process are: 1) selecting the period of record for analysis, and; 2) establishing an appropriate water year type classification system. Accordingly, PCWA will first work with the resource agencies to establish the period of record that should be evaluated. PCWA will then complete basic statistical analyses using hydrologic data for the agreed upon period of record. After reviewing the hydrologic data, PCWA will work with the resource agencies to select an appropriate water year classification system. Currently, PCWA does not operate the MFP using typical year type criteria (i.e. the Department of Water's (DWR's) classification system). Instead, PCWA uses three different storage and two different release operating criteria that are tied to Folsom Reservoir annual unimpaired inflow. The year type classification system to be used for the MFP relicensing studies will need to consider PCWA's operating criteria and obvious hydrologic data breaks.

Once concurrence with the resource agencies has been reached on the period of record and water year type classification, the magnitude, timing, duration, rate of change and frequency of flows will be described with hydrographs and exceedance tables. The time-scales will be those allowed by the existing data, daily, monthly, hourly, or in 15-minute increments. A series of tables will also be generated from the streamflow gaging data including: mean monthly flow, monthly exceedance flows, and mean daily flow for each year of the period of record. Duration curves depicting the median flow for each station will also be generated. In addition, hydrographs illustrating mean daily stream flow at the point of diversion and in the bypassed reaches for each month of representative water year types will be presented. The hydrologic analyses will also provide the following information:

- Flood frequency curves for both Project and unimpaired flows (both mean daily flow and instantaneous flow depending on data availability).
- Base flow curves for both Project and unimpaired flows (mean daily flow depending on data availability).
- Return intervals for peak flows (1.5, 2, 5, 10, and 25 years depending on data availability).
- Return intervals on 14-day high flows.

IHA Analysis

The Indicators of Hydrologic Alteration (IHA) program developed by Richter et al (1996) allows calculation of up to 32 hydrologic parameters to compare the degree of hydrologic alteration on the magnitude, timing, frequency, duration, and rate of change in a system using biologically relevant variables.

After reviewing the existing hydrologic records in the study area, PCWA has identified six locations that meet the analysis criteria, as follows:

- Middle Fork American River at French Meadows
- Middle Fork American River near Foresthill
- Duncan Canyon Creek below diversion dam near French Meadows
- Middle Fork American River above Middle Fork Powerhouse near Foresthill
- Rubicon River below Hell Hole Dam
- Middle Fork American River below Interbay Dam near Foresthill

As requested by the agencies, PCWA will perform the IHA analysis at each of the six locations using all of the selected indicators of hydrologic alteration. As requested by the agencies, the IHA analyses will compare, at a minimum, 25 years of unimpaired mean daily flows to 25 years of regulated mean daily flows. The new IHA Version 7.0 software will be used for the analysis.

5.5 DATA QUALITY ASSURANCE/QUALITY CONTROL

PCWA will develop, document, and follow a protocol to perform quality assurance and quality control. To the extent possible, all records will be examined for consistency and accuracy. The raw data will be plotted as yearly graphs and any apparent anomalies will be investigated. While some errors will be identified in this initial review, it is anticipated that additional inconsistencies will become evident as the data are used to “unimpair” the flows at the key locations. All data will be described with the following sections.

- USGS or other identification number
- Geographic location
- Type of data available (flow, storage or temperature)
- Time step of data (15 minute, hourly, daily, etc.)
- Period of record
- Timing of gage operation, if record is not continuous
- Data Analysis Procedures

5.6 REPORTING

A progress report will be prepared for agency review in mid-2005 summarizing the availability of existing hydrologic data. This information will be used to identify, through agency consultation, the period of record for hydrologic analysis. A detailed report presenting the results of the hydrologic analyses proposed for this phase of work will be distributed for agency review and comment in January 2006. All study results and data files will be made available to the resource agencies as Excel files, text files, HEC-DSS files or other appropriate formats.

5.7 SCHEDULE MILESTONES

The hydrology study described in this plan will be carried according to the following schedule.

Date	Milestone
Jun 2005	Continue collecting existing data and developing web-based database.
Jul 2005	Submit progress report summarizing availability of existing data to resource agencies.
Oct 2005	Semi annual retrieval of new data, update database.
Jan 2006	Submit 2005 Hydrology report to resource agencies for review and comment.
Mar 2006	Incorporate agency comments and distribute final summary report.

5.8 REFERENCES

The following references were used to develop the Hydrology Study Plan and are available for review by the public and resource agencies from PCWA.

Sacramento Municipal Utility District's Upper American River (FERC Project No. 2101) and Pacific Gas and Electric Company's Chili Bar Project (FERC Project No. 2155) Technical Report on Hydrology, April 2004.

Richter, B.D., J.V. Baumgartner, J. Powell, and D.P. Braun 1996. A Method for assessing hydrologic alteration within ecosystems.

APPENDIX A

Preliminary Project Description
Placer County Water Agency
Middle Fork American River Hydroelectric Project
(FERC Project No. 2079)

**Preliminary Project Description
Placer County Water Agency
Middle Fork American River Hydroelectric Project
(FERC Project No. 2079)**

The Middle Fork American River Project (MFP or Project) is a multi-purpose water supply and hydro-generation Project designed to conserve and control waters of the Middle Fork American River, the Rubicon River and certain tributaries. It was constructed by PCWA and brought into operation in 1967.

The Project consists of a series of seven diversions and five powerhouses with a nameplate generating capacity of 224 megawatts (MW). Water from the diversions is controlled and conveyed through five tunnels. At the end of the system, Project water is released to the Middle Fork American River approximately 29 miles upstream of Folsom Reservoir.

The Project includes two principal water storage reservoirs, French Meadows and Hell Hole, two limited storage afterbays, Interbay and Ralston and three small diversions, Duncan Creek Diversion, North Fork Long Canyon Diversion and South Fork Long Canyon Diversion. These Project features are shown geographically on Figure 1 - "Project Facilities", and schematically on Figure 2 - "Project Schematic Diagram".

Duncan Creek Diversion is a 32 foot high concrete gravity dam that routes flows from Duncan Creek into French Meadows Reservoir via the 1.5 mile-long, Duncan Creek Diversion Tunnel. The headwaters of the Middle Fork American River and its tributaries drain to the French Meadows Reservoir, impounded by French Meadows Dam (also referred to as LL Anderson Dam), a 231 foot-high earth and rock fill structure. Water stored in French Meadows Reservoir travels to the Hell Hole Reservoir via the 2.6 mile-long, French Meadows-Hell Hole Tunnel. Hell Hole Dam, a 410 foot rockfill structure, also impounds water flowing from the upper reaches of the Rubicon River drainage into Hell Hole Reservoir.

Water flowing from French Meadows to Hell Hole Reservoir passes through a 691 foot-long penstock and the French Meadows Powerhouse, located on the north shore of Hell Hole Reservoir approximately 1.5 miles east of the Hell Hole Dam. French Meadows Powerhouse has a nameplate generating capacity of 15.3 MW from a single generation unit at a maximum flow rate of about 400 cfs. The Hell Hole Powerhouse, located at the base of the Hell Hole Dam, generates electricity from stream maintenance flow releases into the Rubicon River, and has a nameplate generating capacity of 0.7 MW from a single generator using required stream flow releases.

Water stored in Hell Hole Reservoir is released through the 10.4 mile-long Hell Hole – Middle Fork Tunnel to a 3,653 foot-long penstock into the Middle Fork Powerhouse. Middle Fork Powerhouse has a nameplate generating capacity of 122.4 MW from two generating units at a design flow rate of about 990 cfs. Middle Fork Powerhouse

releases water to Middle Fork Interbay Reservoir, impounded by Interbay Dam, a 70 foot high concrete gravity dam on the Middle Fork American River. Interbay Reservoir acts as an afterbay for the Middle Fork Powerhouse and as a forebay for the inlet to the Middle Fork-Ralston Tunnel.

Water flowing through the Hell Hole - Middle Fork Tunnel is augmented by diversions from the North and South Forks of Long Canyon Creeks. Water diverted by a 10 foot concrete gravity dam from North Fork Long Canyon Creek and a 27 foot concrete gravity dam from South Fork Long Canyon Creek flows through buried metal pipes into 6 foot diameter vertical shafts that join the Hell Hole – Middle Fork Tunnel.

The 6.7 mile-long, Middle Fork-Ralston Tunnel terminates in a 1,670 foot-long penstock that supplies water to drive a single generating unit at the Ralston Powerhouse. The powerhouse has a nameplate electrical generating capacity of 79.2 MW from a single generating unit at a maximum flow rate of about 924 cfs, and discharges to the Ralston Afterbay. The Ralston Afterbay Dam is a 89 foot concrete gravity dam located on the Middle Fork American River just down stream of the Rubicon River's confluence with the Middle Fork American River.

The Ralston Afterbay supplies water to the 0.1 mile-long Oxbow Tunnel. Oxbow Powerhouse at the downstream end of the tunnel has a nameplate electrical generating capacity of 6.1 MW from a single generator at a maximum flow rate of about 1075 cfs.

Water from the Oxbow Powerhouse is discharged back to the Middle Fork American River approximately 29 miles upstream of Folsom Reservoir.

Operation of the Middle Fork Project

The Project is operated to meet three objectives: maintenance of water flows to protect environmental resources, water supply for PCWA customers, and generation of electrical energy. In addition to the FERC license, operation of the Project is also governed by water rights permits, water supply contracts, and a power purchase contract with PG&E. Water flows to protect and maintain environmental resources are defined in the FERC License and in agreements with the State of California. These flows occur from the Duncan Creek Diversion (Duncan Creek); French Meadows, Interbay and Ralston Afterbay Dams (Middle Fork American River), North and South Long Canyon Diversions (Long Canyon Creek) and Hell Hole Dam (Rubicon River).

The water rights permits, water supply contracts and FERC License conditions constrain how PCWA plans for water use and how PG&E optimizes electrical generation. Management of flows is also constrained by annual and seasonal water availability. In late fall and early winter the water levels in French Meadows and Hell Hole reservoirs are reduced to provide adequate storage to manage spring runoff. The fall/winter drawdown must balance the objectives of providing sufficient storage space to minimizing the potential for spilling the reservoirs if the following spring is wet, but must also retain sufficient water in storage to ensure an adequate water supply to meet environmental and consumptive demands if the following spring is dry. During spring

runoff operating flows are adjusted to store as much runoff as possible without spilling the reservoirs. After the reservoirs have reached their maximum capacity in late spring or summer, flows are regulated to first meet environmental flow requirements, then to meet consumptive water supply requirements, and then to optimize power generation. Operation of the system varies from year to year based on the winter snow pack and amount of precipitation (wet year vs. dry).

Under typical operating conditions the Project generates approximately 1 million-megawatt hours annually. Operations patterns for the Project may include full load operations (typically during when runoff is high), "peaking" operations (when the Project is operated 15 to 18 hours a day to conserve water but help meet peak electrical demand), to low flow operations to conserve water for consumptive use or during Project maintenance periods.

While not within the FERC Project Boundaries, PCWA's consumptive water rights permits identify two points of diversion for water for consumptive purposes downstream of the Project facilities. The Auburn Pumping Station diversion point is approximately 28 miles downstream of the Project's FERC boundary. The second point of consumptive diversion is via facilities near Folsom Dam, at the downstream end of Folsom Reservoir, approximately 48 miles downstream of the Project's FERC boundary.

FIGURES

Placeholder for Figure A-1

Figure A-1 Project Facilities

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

Placeholder for Figure A-2

Figure A-2 Project Schematic Diagram

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

APPENDIX B

**Summary of Stream and Reservoir
Water Temperature Pilot Program**

**Placer County Water Agency
Middle Fork American River Hydroelectric Project
(FERC NO. 2079)**

**Summary of Stream and Reservoir
Water Temperature Pilot Program**

Prepared for:



Placer County Water Agency
P.O. Box 6590
Auburn, CA 95604

Prepared by:



Surface Water Resources, Inc.
2031 Howe Ave., Suite 110
Sacramento, CA 95825

January 28, 2005

TABLE OF CONTENTS

	Page
1.0 Introduction	1
2.0 Geographic Setting	2
3.0 Construction of Pilot Program	2
4.0 Data Collection Objectives and Methods	3
4.1 Stream Temperature Monitoring	3
4.1.1 Objectives.....	3
4.1.2 Methods.....	3
4.2 Reservoir Water Temperature Profiling	4
4.2.1 Objectives.....	4
4.2.2 Methods.....	4
5.0 Results and Recommendations	9
5.1 Stream Temperature Monitoring	9
5.1.1 Duncan Canyon Creek	10
5.1.2 Middle Fork American River	10
5.1.3 Long Canyon Creek	11
5.1.4 Rubicon River	11
5.1.5 North Fork American River	12
5.1.6 Recommendations	12
5.2 Reservoir Water Temperature Profiling	13
5.2.1 French Meadows Reservoir.....	13
5.2.2 Hell Hole Reservoir	14
5.2.3 Recommendations	15
5.3 Meteorological Monitoring	15
5.3.1 Recommendations	16

Table

Table 1. Current Water Temperature Monitoring Locations Associated with the MFP.

Figures

- Figure 1. The Stream and Reservoir Network in the Vicinity of the MFP.
- Figure 2. The Current Water Temperature, Air Temperature and Relative Humidity Monitoring Station Locations in the vicinity of the MFP.
- Figure 3. Water Temperature Profile Locations in French Meadows Reservoir.
- Figure 4. Water Temperature Profile Locations in Hell Hole Reservoir.
- Figure 5. Comparison of Daily Average Water Temperatures Measured in Duncan Canyon Creek Upstream (DC1) and Downstream (DC2) from Duncan Canyon Creek Diversion Dam.
- Figure 6. Comparison of Daily Average Water Temperatures Measured in the Middle Fork American River.
- Figure 7. Comparison of Daily Average Water Temperatures Measured in North Long Canyon Creek Upstream (NL1) and Downstream (NL2) from North Fork Diversion Dam, and South Long Canyon Creek Upstream (SL1) and Downstream (SL2) from South Fork Diversion Dam.
- Figure 8. Comparison of Daily Average Water Temperatures Measured Upstream (FL1 and RR1) and Downstream (RR2 and RR4) from Hell Hole Reservoir.
- Figure 9. French Meadows Reservoir Water Temperature Profiles at Site FM1 on September 7, 20, 30 and October 13, 2004.
- Figure 10. Hell Hole Reservoir Water Temperature Profiles of Site HH2 on September 7, 20, 30 and October 13, 2004.

Attachment A

- Figure A.1 Daily Average and Range of Water Temperatures in Duncan Canyon Creek Upstream from Duncan Canyon Creek Diversion Dam (DC1).
- Figure A.2 Daily Average and Range of Water Temperatures in Duncan Canyon Creek Downstream from Duncan Canyon Creek Diversion Dam (DC2).
- Figure A.3 Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from French Meadows Reservoir (MF2).
- Figure A.4 Daily Average and Range of Water Temperatures from the Middle Fork American River Upstream from Middle Fork Powerplant (MF3).
- Figure A.5 Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from Middle Fork Interbay (MF4).
- Figure A.6 Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from Ralston Afterbay Dam (MF5).
- Figure A.7 Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from Oxbow Powerplant (MF6).
- Figure A.8 Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from the North Fork of the Middle Fork American River Confluence (MF7).
- Figure A.9 Daily Average and Range of Water Temperatures in North Long Canyon Creek Upstream from North Fork Diversion Dam (NL1).
- Figure A.10 Daily Average and Range of Water Temperatures in North Long Canyon Creek Downstream from North Fork Diversion Dam (NL2).
- Figure A.11 Daily Average and Range of Water Temperatures in South Long Canyon Creek Upstream from South Fork Diversion Dam (SL1).
- Figure A.12 Daily Average and Range of Water Temperatures in South Long Canyon Creek Downstream from South Fork Diversion Dam (SL2).
- Figure A.13 Daily Average and Range of Water Temperatures in Five Lakes Creek Upstream from Hell Hole Reservoir (FL1).
- Figure A.14 Daily Average and Range of Water Temperatures in the Rubicon River Upstream from Hell Hole Reservoir (RR1).
- Figure A.15 Daily Average and Range of Water Temperatures in the Rubicon River Downstream from Hell Hole Reservoir (RR2).
- Figure A.16 Daily Average and Range of Water Temperatures in the Rubicon River Upstream from Ralston Powerplant (RR4).
- Figure A.17 Daily Average and Range of Water Temperatures from North Fork American River Downstream from the Middle Fork American River Confluence (NF2).

Attachment A (continued)

- Figure A.18 Daily Average and Range of Water Temperatures from North Fork American River at the Former Auburn Dam Site.
- Figure A.19 French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on September 7, 2004.
- Figure A.20 French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on September 20, 2004.
- Figure A.21 French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on September 30, 2004.
- Figure A.22 French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on October 13, 2004.
- Figure A.23 Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on September 7, 2004.
- Figure A.24 Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on September 20, 2004.
- Figure A.25 Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on September 30, 2004.
- Figure A.26 Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on October 13, 2004.

1.0 INTRODUCTION

To prepare for relicensing, Placer County Water Agency (PCWA) searched various databases and resource agency records to determine whether existing historical water temperature information is available for the streams, rivers and reservoirs in the vicinity of the Middle Fork American River Hydroelectric Project (MFP or Project). PCWA's search included examining records maintained by public agencies and private organizations, including:

- United States Geological Survey (USGS);
- California Department of Water Resources (DWR);
- U.S. Environmental Protection Agency (EPA);
- Sacramento Municipal Water District (SMUD);
- U.S. Forest Service (USFS);
- U.S. Bureau of Reclamation (USBR);
- PCWA's historical data; and
- Other databases and published reports.

To date, PCWA has determined that three types of existing historical water temperature data are available for the streams and rivers in the vicinity of the MFP: 1) spot measurements; 2) continuous data from two temperature monitoring stations; and 3) data collected in association with a recent sediment transport study in the Middle Fork American River, downstream of PCWA's Oxbow Powerhouse. In addition, a limited amount of meteorological data exists. Existing water temperature data does not appear to be available for any of the Project reservoirs.

Spot water temperature measurements are available for the streams and rivers at various locations in the vicinity of the MFP. Spot water temperature measurements are those taken periodically during the collection of other, specifically targeted, water quality parameters such as dissolved oxygen, bacteria, or chemical constituents, or during normal flow gage maintenance. Although potentially useful for some comparisons, spot water temperatures cannot be used to characterize stream or reservoir water temperatures.

Continuous water temperature data is available from two stations, one operated by the USGS and the other operated by SMUD. The USGS station is located on the Middle Fork American River, downstream from the MFP, at the former Auburn Dam site. This station has been operated continuously since 1999 and the data from this station is publicly available. SMUD's water temperature monitoring station is located on the South

Fork Rubicon River, which discharges to the Rubicon River, downstream from Hell Hole Reservoir. SMUD has offered to share its data with PCWA.

PCWA has collected some continuous water temperature data in the American River, downstream of the Oxbow Powerhouse. These data were collected in 2002, 2003 and 2004 in association with a sediment transport study. No other continuous historical water temperature data for any of the streams, rivers and reservoirs within the vicinity of the MFP were identified.

A limited amount of meteorological data is available from three stations situated in the vicinity of the MFP, one located at Greek Store in the Duncan Canyon Creek basin, one located in the upper Duncan Canyon Creek basin, and one located at Hell Hole Reservoir. The Greek Store station is operated by the USBR and measures, among other parameters, precipitation and air temperature. Data from this site is available from 1995 through present. The upper Duncan Canyon Creek area station is operated by the USFS and measures, among other parameters, relative humidity, solar radiation, precipitation and air temperature. Data from this site is available from 2001 through present. The Hell Hole station is operated by the USFS. Air temperature and precipitation data are available from this station from 1991 through April 2004. Relative humidity data is available from 1995 through April 2004.

2.0 GEOGRAPHIC SETTING

The MFP is located on the Middle Fork American River, the Rubicon River and several tributaries. The principal Project features include two primary reservoirs (Hell Hole and French Meadows), five smaller impoundments, water conveyance facilities and five powerplants. The reservoirs and streams in the vicinity of the MFP are shown on Figure 1.

3.0 CONSTRUCTION OF PILOT PROGRAM

Considering the absence of widespread and continuous water temperature data for the rivers, streams and reservoirs in the vicinity of the MFP, PCWA initiated a pilot program to monitor the stream and river reaches associated with the MFP. The pilot program consisted of installing water temperature monitoring stations and profiling the two primary Project reservoirs, Hell Hole and French Meadows, as summarized in the following.

PCWA installed 22 water temperature loggers in the streams and rivers in the vicinity of the MFP during September and October of 2003. Selection of water temperature monitoring sites to be included in the pilot program considered:

- The location of MFP diversions and powerplants;
- The influence of major tributaries, and the potential of each to affect the water temperatures in the vicinity of the MFP;

- The locations of established instream flow monitoring stations;
- The locations of existing water temperature monitoring stations; and
- Site accessibility.

Section 4.1 provides greater detail on general and specific water temperature monitoring site selection considerations and criteria.

Data from most of the 22 temperature gages was downloaded and reviewed, and the results prompted PCWA to install eight additional water temperature loggers during the summer of 2004. Additionally, due to the absence of available reservoir water temperature data in the primary MFP reservoirs, PCWA initiated a reservoir profiling program in the fall of 2004. PCWA also installed six ambient air temperature and relative humidity loggers to obtain meteorological information that could be used to help interpret the water temperature data. The locations of these relative humidity/ambient air temperature loggers are shown on Figure 2.

Currently, the water temperature monitoring array consists of 32 stream monitoring stations (30 maintained by PCWA, one maintained by SMUD and one maintained by the USGS), and three reservoir profiling sites each in French Meadows and Hell Hole. The following describes PCWA's water temperature monitoring and reservoir profiling pilot program in more detail, and provides recommendations for future water temperature monitoring.

4.0 DATA COLLECTION OBJECTIVES AND METHODS

4.1 STREAM TEMPERATURE MONITORING

4.1.1 OBJECTIVES

The principal objectives of the stream water temperature monitoring program were to characterize water temperatures in the streams and rivers upstream and downstream of MFP facilities and to determine how major tributaries influence water temperatures in the Middle Fork American River and the Rubicon River. Figure 2 illustrates the current array of water temperature stations associated with the water temperature monitoring program.

4.1.2 METHODS

General Water Temperature Logger Site Selection

Monitoring locations are situated to reflect the complex movement of water throughout the MFP system. Table 1 describes the locations, installation dates, and measurement objectives for the 32 water temperature loggers currently monitoring water temperatures in the streams and rivers in the vicinity of the MFP, including the 30 stations installed by PCWA and each of the stations maintained by SMUD and the USGS.

Specific Water Temperature Logger Site Selection

The specific placement and procedures for installing the water temperature gages required consideration of several issues. The installation of each logger followed standard manufacturer and USGS protocols. Water temperature gages were placed in areas considered to be representative of the thermal characteristics of the river in the area.

The water temperature data loggers were placed as near the thalweg of the stream channel as possible to ensure complete mixing of the water, in consideration of potential seasonal fluctuations in streamflow. The document titled "*Water Temperature Monitoring Station Installation, PCWA Middle Fork Project, Draft Report, December 2003*" (PCWA 2003) provides additional details regarding the installation procedure for the water temperature loggers. PCWA (2003), in association with "*Water Temperature Monitoring Station Installation, PCWA Middle Fork Project, Addendum, October 2004*" (PCWA 2004), provides specific site accounts for each water temperature logger installed for the MFP water temperature monitoring pilot program.

4.2 RESERVOIR WATER TEMPERATURE PROFILING

4.2.1 OBJECTIVES

The primary objective of the reservoir water temperature profiling program was to characterize the water temperatures of the MFP reservoirs and to identify the occurrence, timing and nature of the thermal processes, such as thermal stratification, occurring in MFP reservoirs.

4.2.2 METHODS

Water temperature profiling efforts were undertaken on September 7, 20, 30 and October 13, 2004 at French Meadows and Hell Hole reservoirs. Three locations within each reservoir were profiled to identify potential longitudinal water temperature gradients that may exist within each reservoir. Figures 3 and 4 illustrate the profile locations in French Meadows and Hell Hole reservoirs, respectively.

Utilizing topographic maps of the reservoirs, the French Meadows and Hell Hole reservoir monitoring locations were chosen first by selecting a site along the former stream channel near the dam (FM1 and HH1, respectively). The upstream sample site (FM3 and HH3) was selected next by identifying a site along the former stream channel in the upper end of the main body of each reservoir. The third sample location (FM2 and HH2) was placed within the former stream channel approximately midway between the lower- and upper-most sites. The approximate geographical coordinates of each site were determined using ESRI ArcMap – ArcView and were input as waypoints into a Garmin III Plus Global Positioning System (GPS) receiver.

Table 1. Current water temperature monitoring locations associated with the MFP.

Stream	Description of Location	Station ID	Geographic Coordinates	Flow Gage Association USGS Number PCWA Number	Date Installed	Measurement Objective
Middle Fork American River System						
Duncan Cr.	Directly upstream from Duncan Cr. Dam	DC1	N 39°08.419' W 120°28.753'	11427700 R1	September 24, 2003	Continuously record water temperature in Duncan Cr. upstream from the water diversion
Duncan Cr.	Directly downstream from Duncan Cr. Dam	DC2	N 39°07.972' W 120°29.045'	11427750 R2	September 24, 2003	Continuously record water temperature in Duncan Cr. downstream from the water diversion
Middle Fork American R.	Directly upstream from French Meadows Reservoir	MF1	N 39°08.105' W 120°41.530'	N/A	October 2, 2003	Continuously record water temperature in the Middle Fork American R. upstream from its confluence with French Meadows Reservoir
Middle Fork American R.	Directly downstream from French Meadows Reservoir	MF2	N 39°06.586' W 120°28.871'	11427500 R3	September 24, 2003	Continuously record water temperature in the Middle Fork American R. downstream from French Meadows Reservoir
Middle Fork American R.	Directly upstream from Middle Fork Powerhouse	MF3	N 39°01.529' W 120°35.650'	11427760 R4	October 9, 2003	Continuously record water temperature in the Middle Fork American R. upstream from the influence of the water released from the Middle Fork Tunnel
Middle Fork American R.	Directly downstream from Middle Fork Powerhouse outlet	IB1	N 39°1.48' W 120°35.81'	N/A	August 17, 2004	Continuously record water temperature in the Middle Fork American R. at the Middle Fork Powerhouse outlet
Middle Fork American R.	Directly downstream from Middle Fork Interbay	MF4	N 39°01.570' W 120°36.181'	N/A	October 9, 2003	Continuously record water temperature in the Middle Fork American R. downstream from Middle Fork Interbay
Middle Fork American R.	Directly downstream from Ralston Afterbay Dam	MF5	N 39°00.250' W 120°44.928'	N/A	October 9, 2003	Continuously record temperature of the water released from the bypass and/or over the dam spillway
Middle Fork American R.	Directly downstream from Oxbow Powerplant	MF6	N 39°00.380' W 120°44.834'	11433212	October 14, 2003	Continuously record temperature of the water released from the Oxbow Powerplant
Middle Fork American River System (continued)						

Table 1. Current water temperature monitoring locations associated with the MFP.

Stream	Description of Location	Station ID	Geographic Coordinates	Flow Gage Association USGS Number PCWA Number	Date Installed	Measurement Objective
Middle Fork American R.	Downstream from the North Fork of the Middle Fork American R. confluence	MF7	N 38°59.998' W 120°45.203'	11433300 R11	October 15, 2003	Continuously record water temperature in the Middle Fork American R. after the influence of the North Fork of the Middle Fork American R.
Middle Fork American R.	Directly upstream from North Fork American R. confluence	MF8	N 38°54.835' W 121°02.195'	N/A	October 15, 2003	Continuously record water temperature in the Middle Fork American R. before the influence of the North Fork American R.
Middle Fork American R.	Downstream from Ruck-a-Chucky rapids	MF9	N 38°57.82' W 120°56.33'	N/A	August 24, 2004	Continuously record water temperature in the Middle Fork American R. between the North Fork American R. and the North Fork of the Middle Fork American R.
North Fork of the Middle Fork American R.	Directly upstream from Middle Fork American R. confluence	NM1	N 39°1.42' W 120°43.13'	N/A	August 16, 2004	Continuously record water temperature in the North Fork of the Middle Fork American R. directly upstream from confluence with Middle Fork American R.
Rubicon River System						
Five Lakes Cr.	Directly upstream from Hell Hole Reservoir	FL1	N 39°04.680' W 120°20.540'	N/A	September 30, 2003	Continuously record water temperature in Five Lakes Cr. upstream from its confluence with Hell Hole Reservoir
Rubicon R.	Directly upstream from Hell Hole Reservoir	RR1	N 39°04.695' W 120°20.851'	N/A	September 30, 2003	Continuously record water temperature in the Rubicon R. upstream from its confluence with Hell Hole Reservoir
Rubicon R.	Directly downstream from Hell Hole Dam	RR2	N 39°03.299' W 120°24.539'	11428800 R6	October 14, 2003	Continuously record water temperature in the Rubicon R. downstream from Hell Hole Dam

Table 1. Current water temperature monitoring locations associated with the MFP.

Stream	Description of Location	Station ID	Geographic Coordinates	Flow Gage Association USGS Number PCWA Number	Date Installed	Measurement Objective
Rubicon River System (continued)						
Rubicon R.	Downstream from Hell Hole Dam and directly downstream from intermittent river segment	RR3	N 39°02.555' W 120°25.546'	N/A	October 14, 2003	Continuously record water temperature in the Rubicon R. after the influence of subsurface streamflow
Rubicon R.	Directly upstream from Ralston Powerplant	RR4	N 39°00.060' W 120°43.230'	N/A	October 2, 2003	Continuously record water temperature in the Rubicon R. upstream from the influence of the Ralston Powerplant discharge
Rubicon R.	Directly downstream from Ralston Powerplant outlet	OX1	N 39°0.07' W 120°43.52'	N/A	August 16, 2004	Continuously record water temperature in the Rubicon R. directly downstream from the Ralston Powerplant outlet
Rubicon R.	Directly upstream from SF Rubicon R.	RR5	N 38°58.22' W 120°28.16'	N/A	August 25, 2004	Continuously record water temperature in the Rubicon R. prior to the influence from the South Fork Rubicon R.
Rubicon R.	Directly downstream from SF Rubicon R.	RR6	N 38°58.13' W 120°28.22'	N/A	August 25, 2004	Continuously record water temperature in the Rubicon R. after the influence from the South Fork Rubicon R.
Rubicon R.	Directly upstream from Pilot Cr.	RR8	N 38°58.22' W 120°40.96'	N/A	August 18, 2004	Continuously record water temperature in the Rubicon R. prior to the influence from Pilot Cr.
South Fork Rubicon R. ^a	Directly downstream from Gerle Cr. confluence	SFRR1	N/A	SMUD	N/A	Continuously record water temperature in the South Fork Rubicon R. downstream from Gerle Reservoir
Long Canyon Cr.	Directly Upstream from Confluence with Rubicon R.	LC1	N 38°59.43' W 120°41.21'	N/A	August 24, 2004	Continuously record water temperatures Long Canyon Cr. prior to confluence with the Rubicon R.
North Fork Long Canyon Cr.	Directly upstream from North Fork Dam	NL1	N 39°03.068' W 120°28.910'	N/A	October 2, 2003	Continuously record water temperatures in North Fork Long Canyon Cr. upstream from North Fork Dam

Table 1. Current water temperature monitoring locations associated with the MFP.

Stream	Description of Location	Station ID	Geographic Coordinates	Flow Gage Association USGS Number PCWA Number	Date Installed	Measurement Objective
Rubicon River System (continued)						
North Fork Long Canyon Cr.	Directly downstream from North Fork Dam	NL2	N 39°03.040' W 120°28.907'	11433085 R28	September 24, 2003	Continuously record water temperatures in North Fork Long Canyon Cr. downstream from North Fork Dam
South Fork Long Canyon Cr.	Directly upstream from South Fork Dam	SL1	N 39°03.077' W 120°28.230'	N/A	September 24, 2003	Continuously record water temperatures in South Fork Long Canyon Cr. upstream from South Fork Dam
South Fork Long Canyon Cr.	Directly downstream South Fork Dam	SL2	N 39°03.620' W 120°28.272'	11433065 R27	October 2, 2003	Continuously record water temperatures in South Fork Long Canyon Cr. downstream from South Fork Dam
Pilot Cr.	Directly upstream from Rubicon R. confluence	PC1	N 38°58.241' W 120°40.996'	N/A	October 24, 2003	Continuously record water temperatures in Pilot Cr. upstream from confluence with the Rubicon R.
North Fork American River						
North Fork American R.	Directly upstream from Middle Fork American R. confluence	NF1	N 38°55.323' W 121°02.316'	N/A	October 15, 2003	Continuously record water temperature in the North Fork American R. before the influence from the Middle Fork American R.
North Fork American R.	Directly downstream from Middle Fork American R. confluence	NF2	N 38°54.919' W 121°02.431'	N/A	October 15, 2003	Continuously record water temperature in the North Fork American R. after the influence from the Middle Fork American R.
North Fork American R. ^b	Former Auburn Dam site	11433790	N 38°51'06" W 121°03'26"	N/A	July 1999	Continuously record water temperatures in North Fork American R. prior to confluence with Folsom Reservoir

^aSouth Fork Rubicon R. water temperature monitoring station maintained by SMUD^bNorth Fork American R. at Former Auburn Dam site water temperature monitoring station maintained by USGS

Note: Geographic coordinates of the water temperature loggers installed in 2004 are approximate

The exact geographical coordinates were determined at each site on September 7, 2004. Once a waypoint for a site was located using the GPS receiver, the location of the former stream channel was determined by utilizing a Lowrance X-85 sonar unit. After this location was found, the GPS receiver was used to collect the geographic coordinates of the site. The stream channel location process was repeated at each sample location to determine the geographic coordinates of each sample site. The GPS receiver was used each successive sampling occasion to locate the geographical coordinates of each sample site.

A Hydrolab® Quanta® multi-parameter water quality monitoring system was used to measure water temperature (± 0.2 degrees Celsius ($^{\circ}\text{C}$)), dissolved oxygen (± 0.2 milligrams per liter (mg/l)) and specific conductance (± 0.001 millisiemens (mS/cm)) at each of the three sample sites in French Meadows and Hell Hole reservoirs. Specific conductance was calibrated prior to entering the field and dissolved oxygen was calibrated at each reservoir (temperature need not be calibrated), following the manufacturer's calibration protocols.

Information collected at each site on each sampling occasion included a general description of the weather, the start and end time of data collection, air temperature at the start and end time of data collection, the maximum water depth observed using the sonar, and additional general comments regarding the data collection process. Generally, measurements were taken at 1-meter (m) vertical increments beginning just beneath the water surface until the thermocline was reached, at which point measurements were taken at 2-m increments. At each sample depth, the parameter readings were allowed to stabilize, which usually took between 15 and 60 seconds, before the water temperature, dissolved oxygen and specific conductance values were recorded on the data sheet. Readings were taken at each site until the sample depth approximated the depth reading on the sonar or the specific conductance reading rapidly increased (which was usually accompanied by a rapid decrease in dissolved oxygen concentration), indicating that the multi-parameter probe was at the bottom of the reservoir.

5.0 RESULTS AND RECOMMENDATIONS

5.1 STREAM TEMPERATURE MONITORING

Water temperature data of varying duration have been collected from 17 of the 22 water temperature loggers that were installed in 2003. Two loggers were lost, apparently due to vandalism, and data from the three remaining loggers was lost due to logger or computer failure. Data from the eight water temperature loggers installed in 2004 have not been downloaded since installation.

According to DWR's water year hydrologic classification indices, water year 2003 was considered to be above normal, and water year 2004 was considered to be below normal (DWR 2004). The daily average and daily range of stream water temperatures recorded under the MFP monitoring program are presented on Figures A.1 through

A.18 in Attachment A. Although gaps exist in the records for many of the water temperature monitoring stations, some trends can be observed. Because many of the water temperature records are incomplete, the following discussion focuses on those stations where water temperatures are available for July and August, typically the warmest months of the year. Water temperatures during the winter in the MFP are cold, with daily averages at or near 0°C in the higher elevations (e.g., FL1) and around 5°C to 7°C in the lower elevations (e.g., MF6).

5.1.1 DUNCAN CANYON CREEK

Some of the warmest water temperatures observed in the vicinity of the MFP occurred in Duncan Canyon Creek. Daily average water temperatures at DC1 and DC2 exceeded 15°C from about the middle of June through August 2004, and approached 20°C at their warmest (Figures A.1 and A.2, respectively). Daily maximum water temperatures in Duncan Canyon Creek at DC1 and DC2 exceeded 20°C, but remained less than 24°C, for much of July and August 2004. Duncan Canyon Creek downstream from the diversion dam was generally about 0.5°C to 3°C warmer than upstream from the diversion dam during most of the period of record (Figure 5).

5.1.2 MIDDLE FORK AMERICAN RIVER

Water temperatures in the Middle Fork American River downstream from French Meadows Reservoir (MF2) remained consistently cool throughout the period of record (Figure A.3). At their highest, MF2 daily maximum water temperatures approached 15°C during parts of June, July and August 2004, while the daily average water temperature during this period remained less than about 12°C.

The period of record at MF3 (the Middle Fork American River upstream from Middle Fork Powerplant) does not include the July or August water temperatures. However, daily average water temperatures in June 2004 approached 19°C, while daily maximums exceeded 20°C (Figure A.4).

Daily average water temperatures in the Middle Fork American River downstream from Middle Fork Interbay (MF4) appear to be cool, remaining below 12°C for the period of record of mid-November 2003 through mid-June 2004 (Figure A.5). Daily maximum water temperatures during this period remained below 15°C.

Daily maximum and average water temperatures at MF5 (downstream from Ralston Afterbay Dam) remained below 20°C and at or below 15°C, respectively, for the period of mid-January through June 2004 (Figure A.6).

Water temperatures at the Oxbow Powerplant Outlet (MF6) peaked at approximately 14°C in late June and early July 2004 (Figure A.7). The daily maximum water temperature for the period of record of November 2003 to early October 2004 indicates that water temperatures did not exceed 15°C.

Daily average water temperatures for five Middle Fork American River locations are presented for comparison purposes on Figure 6. Although the records are incomplete and do not include the warmest part of the year for some of the stations, water temperatures downstream from discharge points such as French Meadows Reservoir (MF2), Middle Fork Interbay (MF4) and Oxbow Powerplant (MF6) appear to remain cool throughout the year. Locations relatively far downstream from discharge points such as MF3 appear to warm, although the incomplete record prohibits accurately quantifying water temperature increase.

5.1.3 LONG CANYON CREEK

Water temperature records for North Long Canyon Creek upstream from North Fork Dam (NL1) indicate that the water temperature logger was dewatered during summer and fall 2004. Daily maximum water temperatures at North Long Canyon Creek downstream from North Fork Dam (NL2) reached 20°C during June 2004, while daily average water temperatures peaked around 16°C during September 2003 and June 2004 during the period of record of mid-September 2003 to late June 2004 (Figure A.10).

Daily average water temperatures in South Long Canyon Creek upstream from South Fork Dam (SL1) during late September 2003 to late October 2004 peaked in August 2004 around 15°C, while daily maximum water temperatures were highest in July and August 2004 at approximately 19°C (Figure A.11). Daily average and maximum water temperatures downstream from South Fork Dam (SL2) were similar to SL1, albeit slightly cooler (Figure A.12). Additionally, the partial records indicate that, in general, North Long Canyon Creek is slightly warmer during the spring and early summer than South Long Canyon Creek (Figure 7).

5.1.4 RUBICON RIVER

Five Lakes Creek (FL1) daily average water temperatures remained below 15°C during the period of October 2003 through June 2004 (Figure A.13 in Attachment A). Maximum water temperatures during this period were approximately 17°C.

Water temperatures in the Rubicon River upstream from Hell Hole Reservoir (RR1) exhibited maximum daily averages of approximately 17°C during June 2004 for the period of record of October 2003 through June 2004. Daily maximum water temperatures during this period remained below 19°C (Figure A.14).

Daily average water temperatures collected on the Rubicon River system at four sites are illustrated on Figure 8. It is not possible to accurately detect trends regarding the downstream persistence of water temperatures until further data is collected.

5.1.5 NORTH FORK AMERICAN RIVER

Water temperature data for the North Fork American River at the former Auburn Dam site (USGS Gage #11433790) for 2003 and 2004 indicate that daily average water temperature exceeded 20°C during June and July 2003 and 2004 (Figure A.18). Daily maximum water temperatures routinely exceeded 20°C during the summer in 2003 and 2004, but did not increase by more than 5°C.

5.1.6 RECOMMENDATIONS

Continuation of the stream water temperature monitoring program is recommended. Four recommendations are suggested for improving the existing pilot program. First, a data downloading schedule should be established and strictly adhered to in order to minimize the potential for data loss. For example, water temperature loggers located in high visibility areas, such as the confluence of the North Fork and Middle Fork American rivers, should be visited approximately monthly during the summer months to minimize the amount of the disruptions in data series, should vandalism occur. Moreover, a data retrieval schedule should be established that considers the characteristics of the individual monitoring sites such as accessibility (e.g., is the logger located near a road or an often-visited Project facility), probability for inaccessibility due to environment (e.g., is the logger located at a site subject to being snowbound in the winter or inundated by high spring snow-melt runoff), or other factors potentially affecting site access, such as safety concerns. Because the loggers have over 300 days of capacity for water temperature data collected at 15-minute intervals, it is recommended that loggers at the most inaccessible sites be downloaded at least twice a year.

Second, additional monitoring sites should be considered at six locations:

- Middle Fork American River upstream from Middle Fork Interbay;
- Middle Fork American River upstream from Duncan Creek;
- Duncan Creek upstream from Middle Fork American River;
- Rubicon River downstream from Long Canyon Creek;
- Rubicon River between South Fork Rubicon River and Pilot Creek; and
- Long Canyon Creek downstream from the North-South Long Canyon Creek confluence.

Third, three currently installed loggers should be moved. The plots of the raw water temperature data collected at NL1 and MF5 reveal spikes in water temperatures that suggest the loggers were exposed to air. Also, inspection of the SL1 and SL2 water temperature data illustrates that SL1 temperatures are warmer than SL2 temperatures – a trend not detected at the two other locations where water temperature is monitored

upstream and downstream from a small diversion structure (i.e., Duncan Canyon and North Long Canyon creeks). The trend observed at SL1 and SL2 suggests that some localized heating near the SL1 logger is influencing measured water temperature. It is recommended that SL1 be moved to determine whether the warmer water temperatures measured at SL1 compared to SL2 are an artifact of the specific SL1 logger placement, or a function of a warmer stream environment upstream from the South Fork Dam. Also, the logger at NF1 that was lost due to vandalism and should be replaced.

Finally, redundant water temperature loggers should be installed at all current and any newly installed water temperature monitoring sites. Redundant loggers at each site would serve to minimize the potential loss of data due to vandalism or logger displacement and subsequent loss.

5.2 RESERVOIR WATER TEMPERATURE PROFILING

5.2.1 FRENCH MEADOWS RESERVOIR

In general, the reservoir profiling results indicate that French Meadows Reservoir is a cool water reservoir. Water temperatures ranged from approximately 14.5°C to 19°C at the surface to approximately 8°C to 10°C near the bottom of the reservoir during the sampling period of September 7 to October 13, 2004. French Meadows Reservoir remained stratified during the sampling period, with the thermocline gradually cooling and sinking. Figure 9 presents the water temperatures from one sampling site on French Meadows Reservoir on each of the sampling dates in 2004 to illustrate the general nature of the water temperature profiles within the reservoir.

Results from the four reservoir water temperature profiling efforts indicate that during the period sampled there is little difference between the water temperature characteristics among the three sites (FM1, FM2 and FM3) sampled within French Meadows Reservoir (Figures A.19 through A.22 in Attachment A). Figure A.19 shows that water temperatures in the epilimnion are very similar (less than 1°C difference) at the upper (FM3), middle (FM2), and lower (FM1) reservoir sites on September 7, 2004. Figure A.19 also illustrates that the thermocline, generally defined as the region exhibiting the greatest inflection in the temperature depth curve, is located at a similar location, between 15 and 17 meters, for the three sites on September 7. Furthermore, the thermocline is formed at essentially the same depth for each of the three sample sites during each of the sampling occasions, except for FM3 on October 13, which had no distinct thermocline.

One main difference between the three sample sites is their maximum depths observed. Site FM3 is about one-half the depth of FM1. The shallow nature of FM3 relative to FM1 and FM2 appears to affect the character of the hypolimnion (the cooler, denser lowermost layer) at the upstream end of the reservoir. Whereas FM1 and FM2 have distinct hypolimnions, FM3 does not. Because of this apparent lack of a hypolimnion, the water temperatures near the bottom of the reservoir at FM3 were between 2 and 5°C warmer than those at FM1 and FM2 during the sampling period of September 7

through October 13, 2004. Additionally, data collected on October 13, 2004 indicate that FM3 was nearly isothermal, while FM1 and FM2 were still strongly stratified.

Closer examination of Site FM1 illustrates the shifting water temperature-depth relationship in French Meadows Reservoir from early September to mid-October 2004. Figure 9 shows that French Meadows is strongly stratified during each sample date, but that the thermal stratification character changes. First, the epilimnion cooled and vertically expanded. Water temperatures in the epilimnion were approximately 18.5°C on September 7, and decreased to approximately 14.5°C by October 13. The depth of the thermocline also decreased from approximately 17 m to approximately 24 m, resulting in a more extensive epilimnion.

Second, as the French Meadows Reservoir thermocline sinks and cools during the fall, the metalimnion (the region of water, including the thermocline, characterized by decreasing water temperature between the epilimnion and hypolimnion) correspondingly cooled and vertically truncated. On September 7, the water temperatures within the metalimnion ranged from approximately 18°C near the top of the layer to approximately 9°C near the bottom of the layer. By October 13, the upper part of the metalimnion had cooled to approximately 14°C, while the lower metalimnion remained approximately 9°C. Whereas the metalimnion layer encompassed approximately 14 m on September 7, it had decreased to encompass approximately 4 m by October 13 (Figure 9).

Third, during the September 7 through October 13 period, the hypolimnion appears relatively unchanged. The water temperature remained approximately 8°C, and the hypolimnion extended about 12 to 16 meters up from the bottom of the reservoir.

5.2.2 HELL HOLE RESERVOIR

In general, the results of the reservoir profiling indicate that Hell Hole Reservoir is a cool water reservoir. Water temperatures ranged from approximately 15.5°C to 19°C at the surface to approximately 8°C to 12°C near the bottom of the reservoir during the sampling period of September 7 to October 13, 2004. Hell Hole Reservoir remained stratified during the sampling period, with the thermocline gradually cooling and sinking. Figure 10 presents the water temperatures from one sampling site on Hell Hole Reservoir on each of the sampling dates in 2004 to show the general nature of the water temperature profiles within the reservoir.

Similar to the three sample sites in French Meadows Reservoir, the three sample sites in Hell Hole Reservoir (HH1, HH2, and HH3) exhibited relatively little difference in their thermal characteristics on a given day during the sampling period (Figures A.23 through A.26 in Attachment A). During each of the sampling occasions, the epilimnion and metalimnion water temperatures among HH1, HH2 and HH3 were very similar. By contrast to French Meadows Reservoir, none of the Hell Hole Reservoir sample sites exhibited a distinct hypolimnion during any of the sampling occasions.

Although the maximum depths observed at HH1 and HH3 were similar, they were between 18 and 25 meters less than the depths observed at HH2. Further distinguishing the three sample sites at Hell Hole Reservoir were the water temperatures observed near the bottom of the reservoir. Site HH2 was consistently cooler, by up to 5°C, than HH1 and HH3. The deepest water temperatures at HH1 and HH3 were most different on September 7, where HH1 was approximately 1.5°C cooler than HH3.

The shifting water temperature-depth relationship in Hell Hole Reservoir is illustrated in Figure 10, a plot of the HH2 water temperature profiles on September 7, 20, 30, and October 13. Similar to the changes observed in French Meadows Reservoir during this same time period, the Hell Hole Reservoir epilimnion cools from an average water temperature of approximately 18°C to less than 15°C, and extends from about 30 meters to about 50 meters in depth from the surface. Correspondingly, the thermocline also shifted from approximately 30 meters to 50 meters below the water surface. Unlike French Meadows Reservoir, however, the coolest temperatures measured at the bottom of the reservoir progressively warmed from approximately 8°C to approximately 10°C from September 7 to October 13. Hell Hole Reservoir did not exhibit a clear hypolimnion layer during the sampling period.

5.2.3 RECOMMENDATIONS

Continuing the reservoir profiling of water temperature, dissolved oxygen and specific conductance at the three previously identified and sampled locations in French Meadows and Hell Hole reservoirs is recommended. The reservoirs should be sampled monthly from April (depending on access) through reservoir destratification (around November). The sampling protocol implemented during 2004 proved to be robust and repeatable, and should be followed again in 2005. Should the examination of 2005 data suggest there is little difference longitudinally in the thermal structures within the reservoirs (e.g., if FM1, FM2, and FM3 profiles are similar), as was illustrated by the limited sample data from 2004, then reservoir profiling may be reduced to one or two locations each in French Meadows and Hell Hole in 2006.

5.3 METEOROLOGICAL MONITORING

A limited amount of meteorological data is available from three stations situated in the vicinity of the MFP, one located at Greek Store in the Duncan Canyon Creek basin, one located in the upper Duncan Canyon Creek basin, and one located at Hell Hole Reservoir. The Greek Store station is operated by the USBR and measures, among other parameters, precipitation and air temperature. Data from this site is available from 1995 through present. The upper Duncan Canyon Creek area station is operated by the USFS and measures, among other parameters, relative humidity, solar radiation, precipitation and air temperature. Data from this site is available from 2001 through present. The Hell Hole station is operated by the USFS. Air temperature and precipitation data are available from this station from 1991 through April 2004. Relative humidity data is available from 1995 through April 2004.

Considering the limited availability of meteorological data, PCWA installed six ambient air temperature/relative humidity stations throughout the vicinity of the MFP, as shown in Figure 2. Data from these loggers will be used to interpret the stream and reservoir water temperature data collected during future monitoring efforts.

5.3.1 RECOMMENDATIONS

PCWA should expand upon the meteorological monitoring that began in 2004. Relative humidity and air temperature should continue to be monitored in association with the water temperature monitoring program, however some of the existing stations should be replaced or upgraded to monitor additional meteorological parameters. Specifically, loggers measuring air temperature and relative humidity at Ralston Afterbay Reservoir (OA1) and Interbay Reservoir (IA1) should be replaced with MET stations (station Ids: RAB and IBR, respectively) capable of measuring six parameters: wind speed, wind direction, relative humidity, air temperature, solar radiation, and precipitation. The USFS MET station at Hell Hole (HLH) currently monitoring wind speed, wind direction, relative humidity, air temperature, and precipitation should replace the PCWA logger monitoring air temperature and relative humidity at Hell Hole Reservoir (HA1). HLH should be upgraded to be capable of also measuring solar radiation.

With these upgrades, the meteorological monitoring array would consist of eight stations strategically located throughout the area of investigation. Stations FA1, NA1, and RA1 will continue to monitor air temperature and relative humidity at French Meadows Dam, North Fork American River at the Auburn State Recreation Headquarters, and at Ellicott Bridge on the Rubicon River, respectively. Stations RAB, IBR, and HLH will monitor wind speed, wind direction, relative humidity, air temperature, solar radiation, and precipitation at Ralston Afterbay Reservoir, Interbay Reservoir, and Hell Hole Reservoir, respectively. Air temperature and precipitation will be monitored in the Duncan Canyon Creek watershed at station GKS, maintained by USBR. The USFS MET station at Upper Duncan Canyon Creek (Station ID DUN) will monitor wind speed, wind direction, relative humidity, air temperature, solar radiation, and precipitation. The table below summarizes the recommendations for augmenting meteorological monitoring.

Description of Location	Station ID	Parameters Measured
Greek Store (USBR)	GKS	Precipitation, Air Temperature
Duncan (USFS)	DUN	Relative Humidity, Air Temperature, Precipitation, Solar Radiation
Auburn State Recreation Headquarters, El Dorado St., Auburn CA	NA1	Relative Humidity, Air Temperature
French Meadows Reservoir	FA1	Relative Humidity, Air Temperature
South side of Ellicott Bridge, Rubicon R.	RA1	Relative Humidity, Air Temperature
Ralston Afterbay Reservoir	RAB	Wind Speed and Direction, Relative Humidity, Air Temperature, Precipitation, Solar Radiation
Middle Fork Interbay	IBR	Wind Speed and Direction, Relative Humidity, Air Temperature, Precipitation, Solar Radiation
Hell Hole Reservoir (USFS)	HLH	Wind speed and Direction, Relative Humidity, Air Temperature, Precipitation, Solar Radiation
Oxbow Dam	OA1	Relative Humidity, Air Temperature
Middle Fork Powerhouse	IA1	Relative Humidity, Air Temperature
PCWA Hell Hole Dormitory	HA1	Relative Humidity, Air Temperature

FIGURES

Placeholder for Figure B-1

Figure B-1 The Stream and Reservoir Network in the Vicinity of the MFP

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

Placeholder for Figure B-2

Figure B-2 The Current Water Temperature, Air Temperature, and Relative Humidity
Monitoring Station Locations in the Vicinity of the MFP

Non-Internet Public Information

The Stream and Reservoir Network

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

Placeholder for Figure B-3

Figure B-3 Water Temperature Profile Locations in French Meadows Reservoir

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

Placeholder for Figure B-4

Figure B-4 Water Temperature Profile Locations in Hell Hole Reservoir

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.

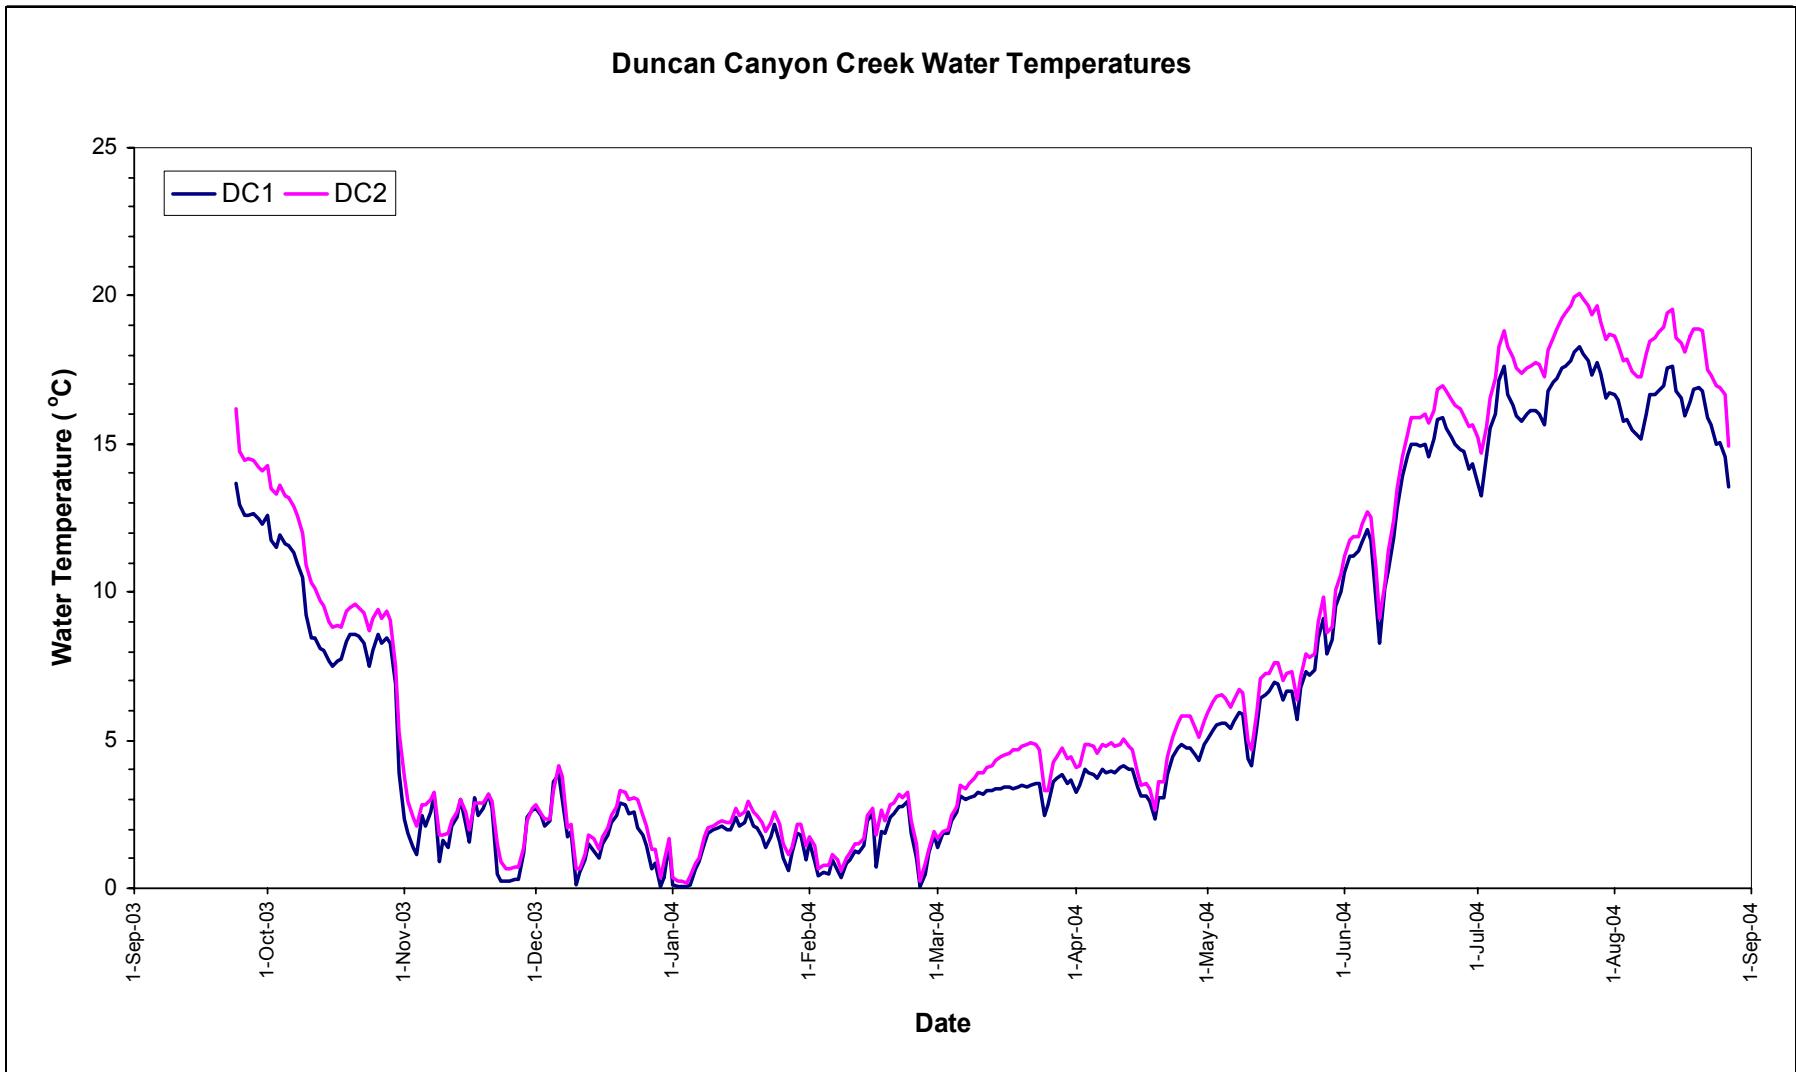


Figure 5. Comparison of Daily Average Water Temperatures Measured in Duncan Canyon Creek Upstream (DC1) and Downstream (DC2) from Duncan Canyon Creek Diversion Dam.

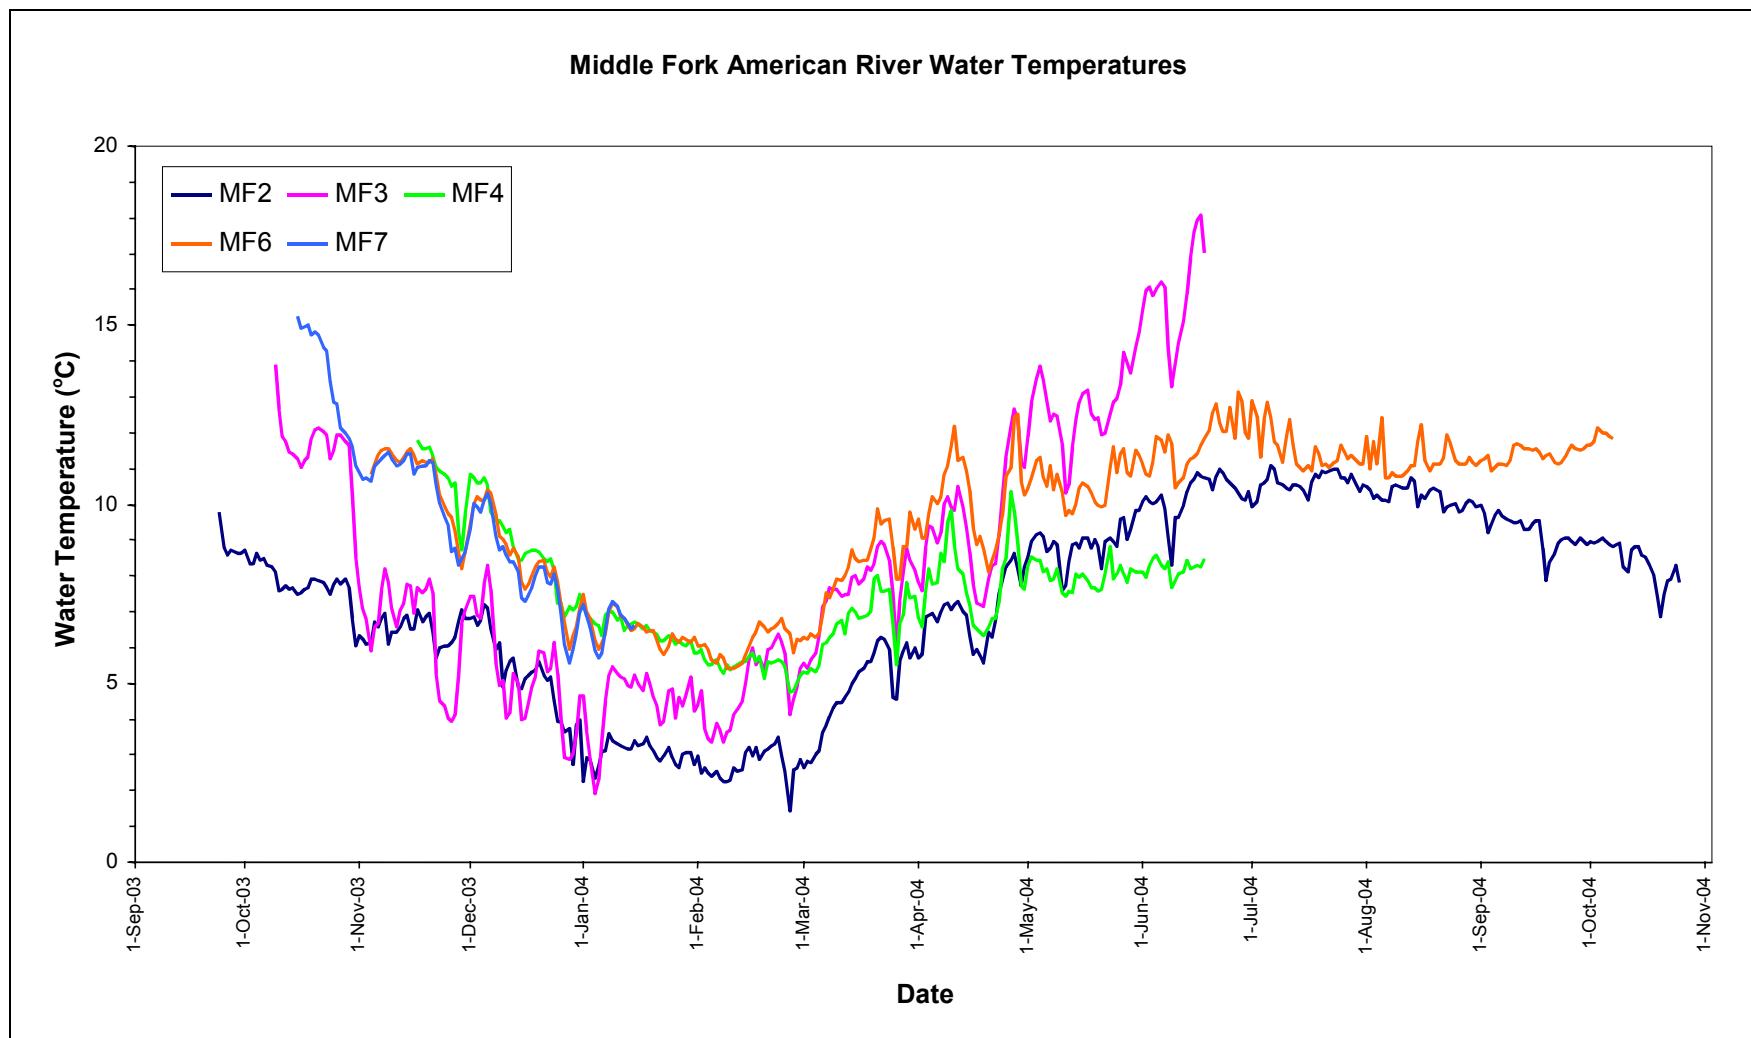


Figure 6. Comparison of Daily Average Water Temperatures Measured in the Middle Fork American River.

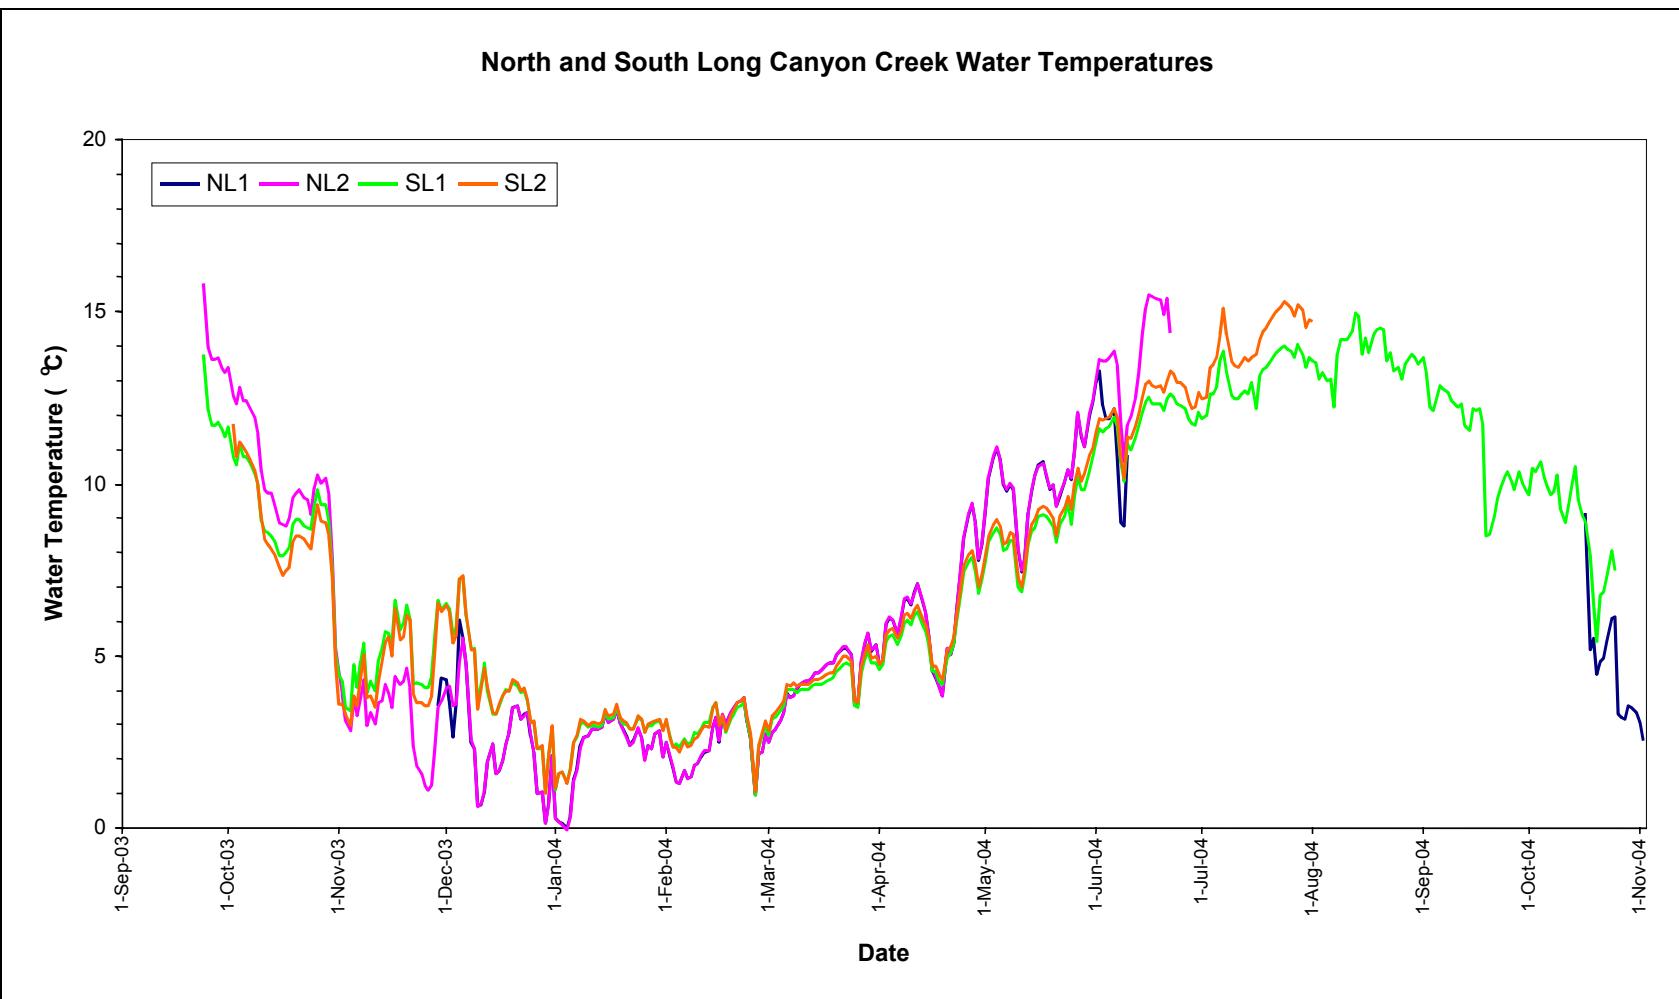


Figure 7. Comparison of Daily Average Water Temperatures Measured in North Long Canyon Creek Upstream (NL1) and Downstream (NL2) from North Fork Diversion Dam, and South Long Canyon Creek Upstream (SL1) and Downstream (SL2) from South Fork Diversion Dam.

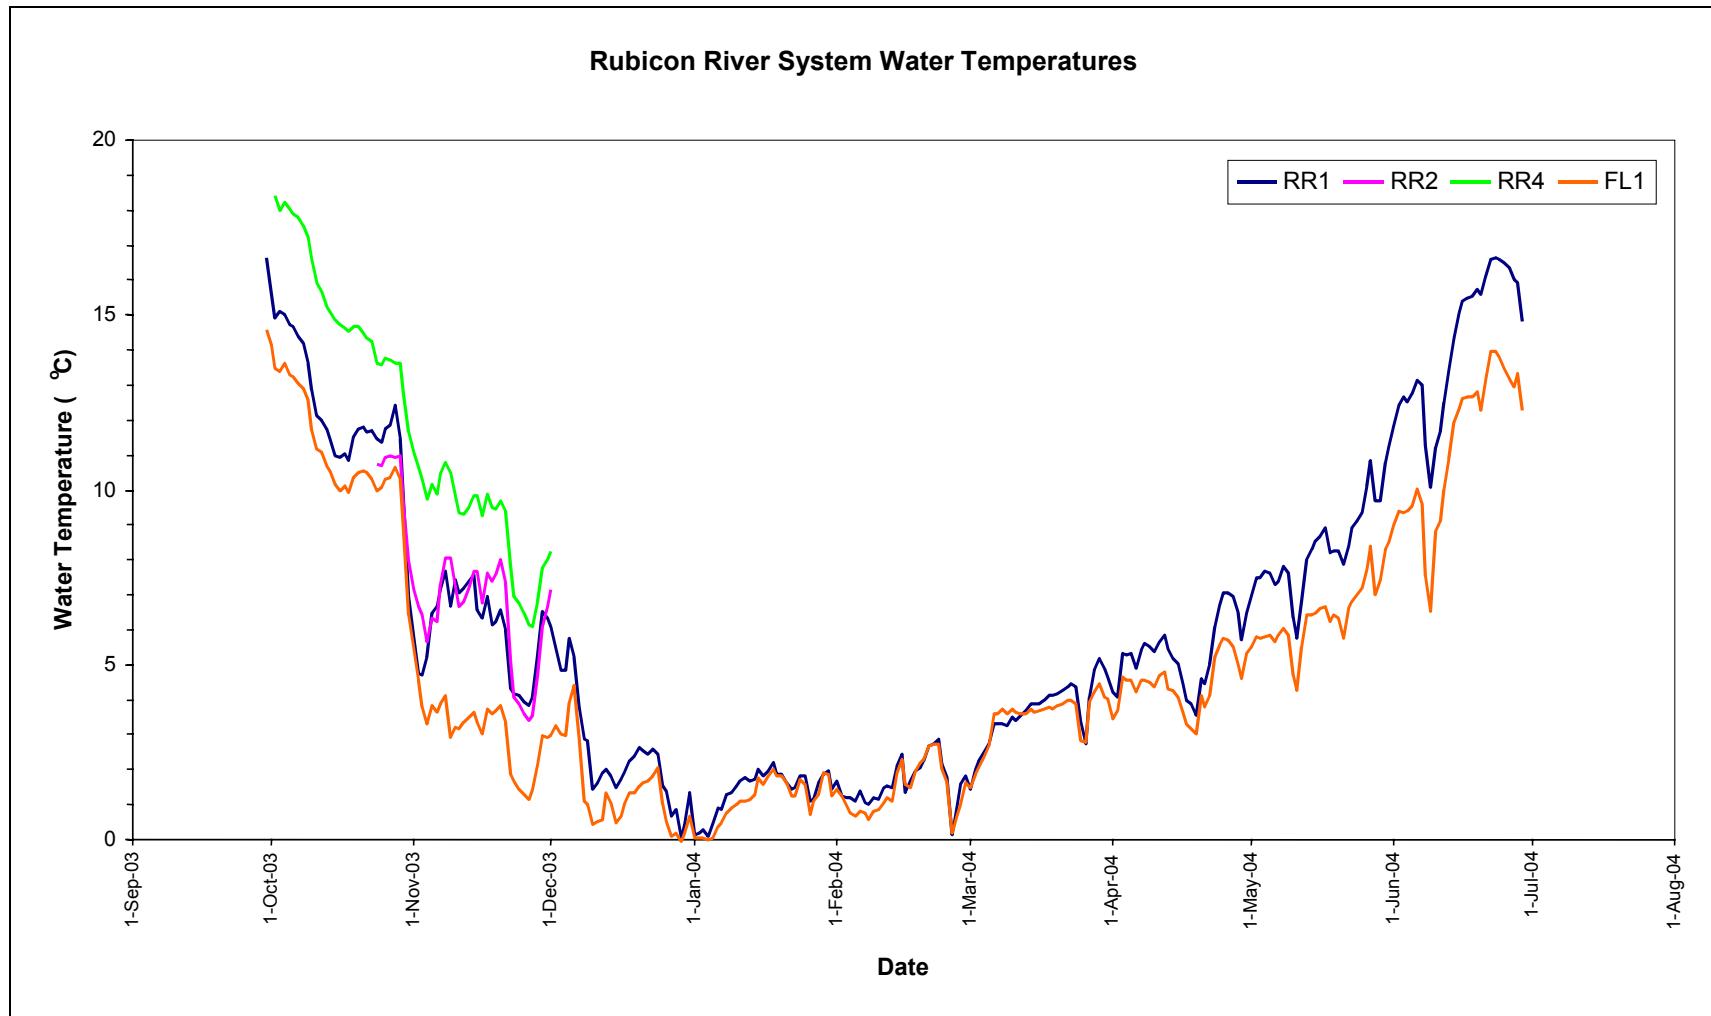


Figure 8. Comparison of Daily Average Water Temperatures Measured Upstream (FL1 and RR1) and Downstream (RR2 and RR4) from Hell Hole Reservoir.

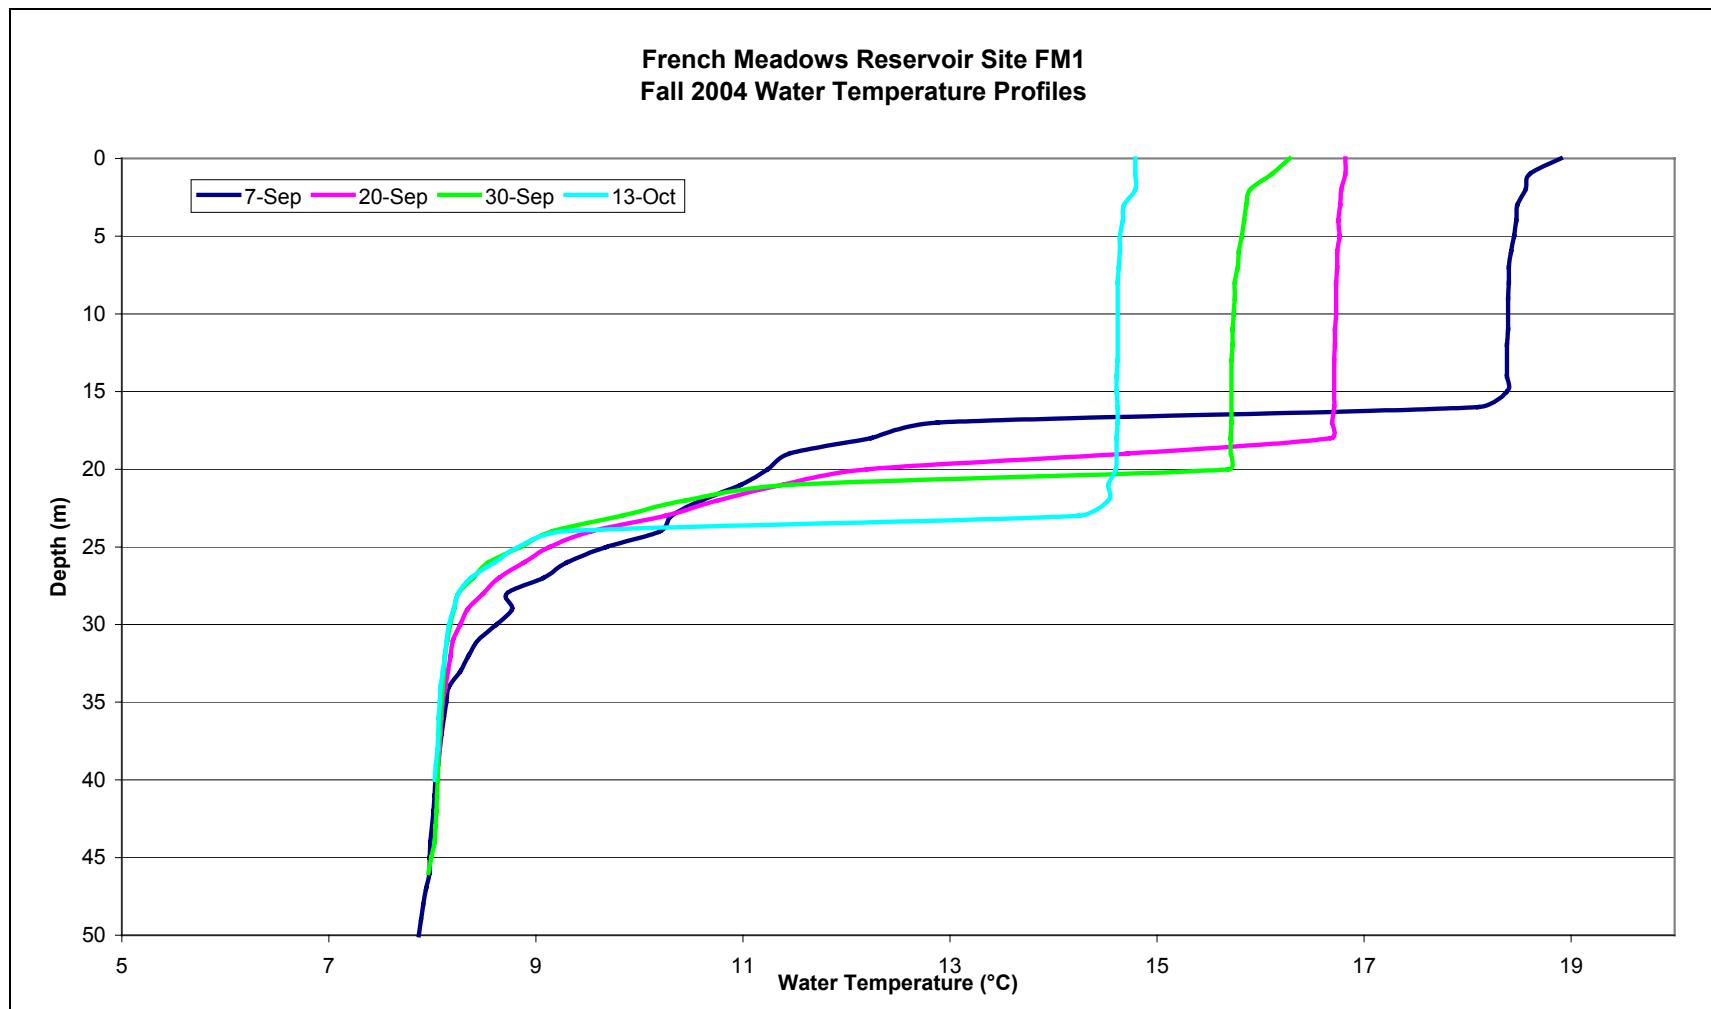


Figure 9. French Meadows Reservoir Water Temperature Profiles at Site FM1 on September 7, 20, 30 and October 13, 2004.

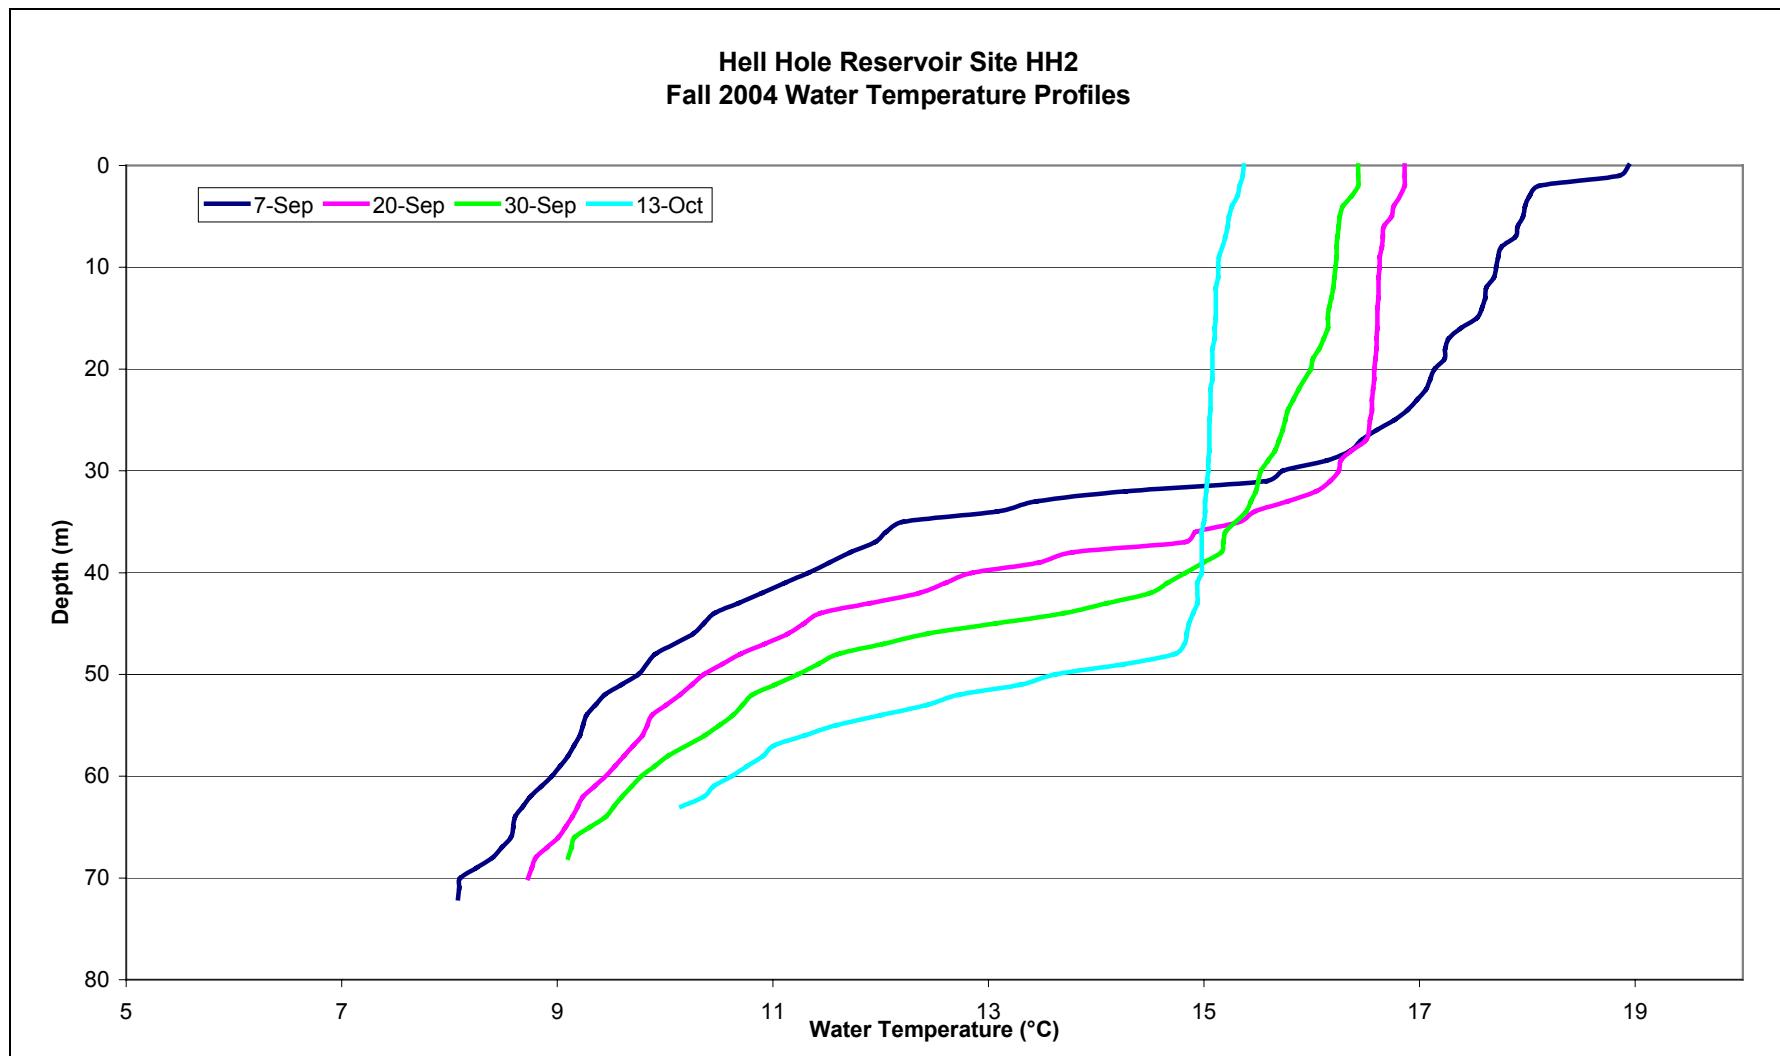


Figure 10. Hell Hole Reservoir Water Temperature Profiles of Site HH2 on September 7, 20, 30 and October 13, 2004.

ATTACHMENT A

**PLOTS OF RESERVOIR WATER TEMPERATURE PROFILES
AND STREAM WATER TEMPERATURES**

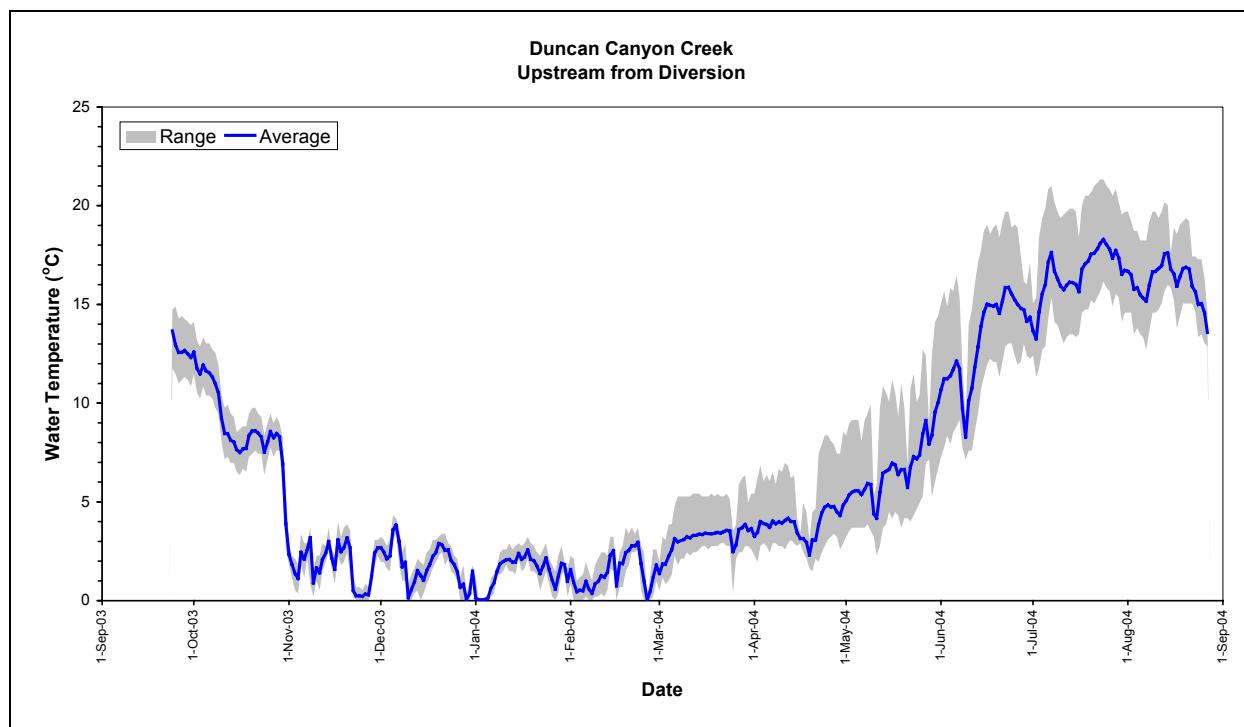


Figure A.1. Daily Average and Range of Water Temperatures in Duncan Canyon Creek Upstream from Duncan Canyon Creek Diversion Dam (DC1).

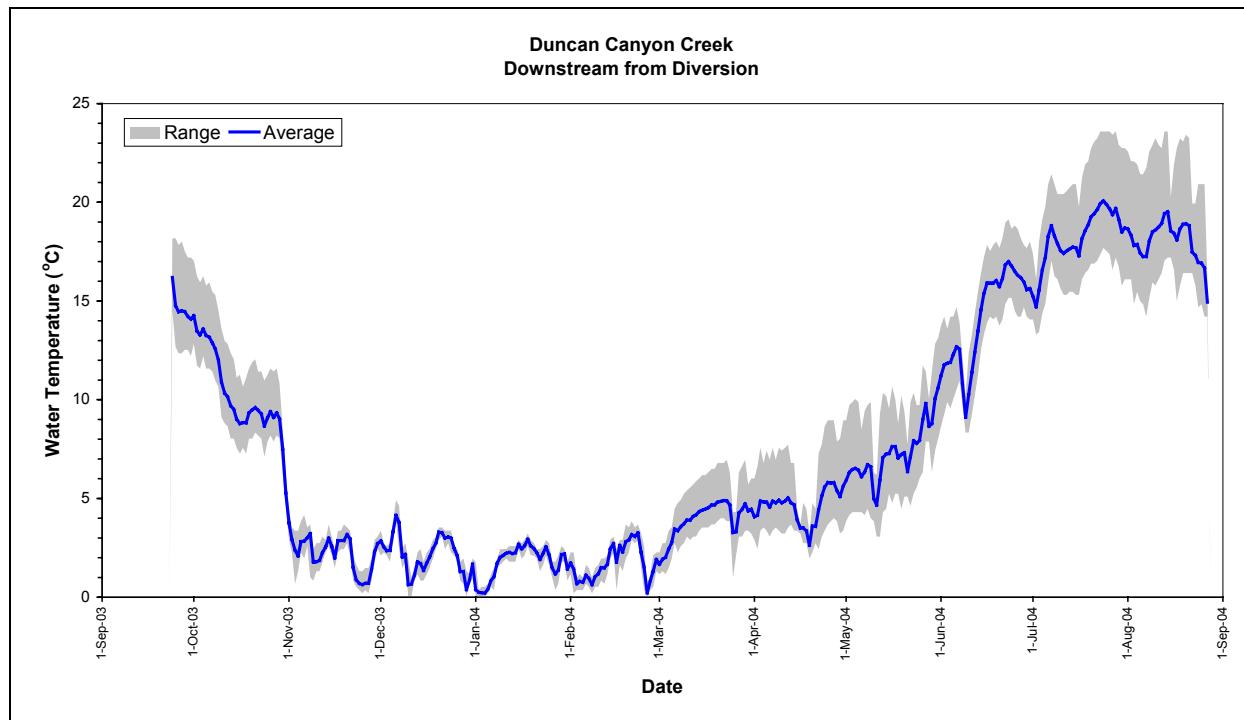


Figure A.2. Daily Average and Range of Water Temperatures in Duncan Canyon Creek Downstream from Duncan Canyon Creek Diversion Dam (DC2).

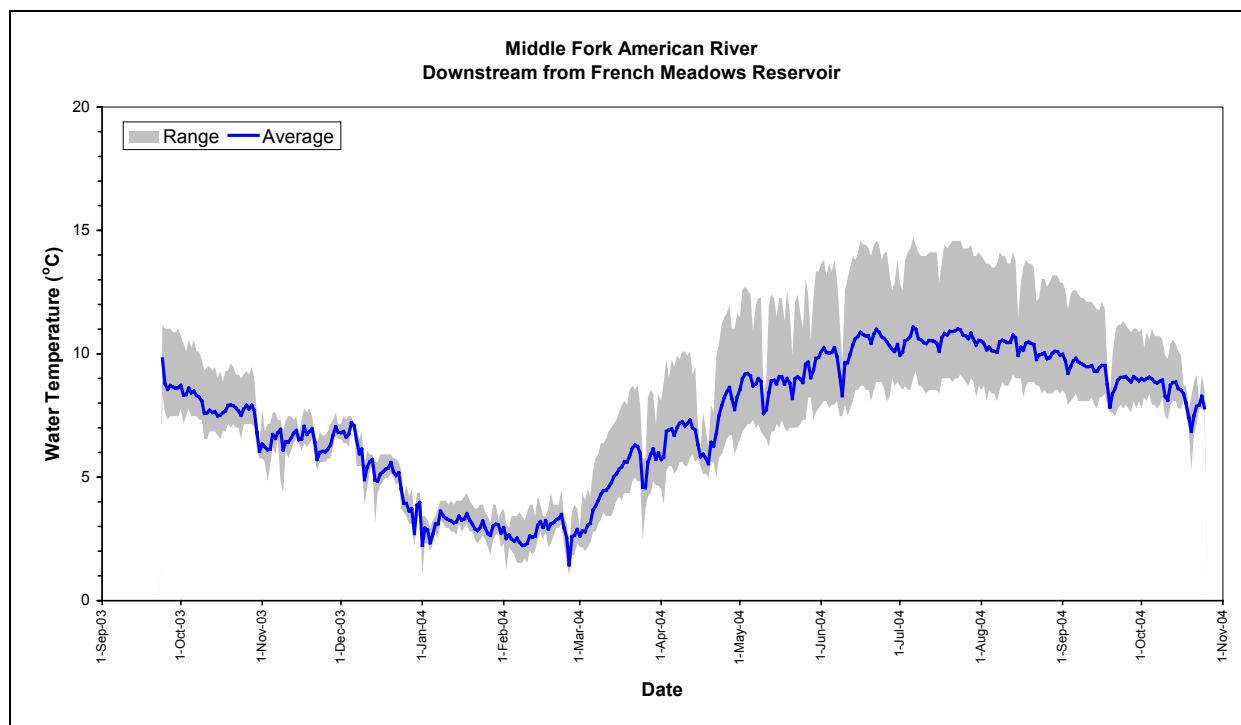


Figure A.3. Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from French Meadows Reservoir (MF2).

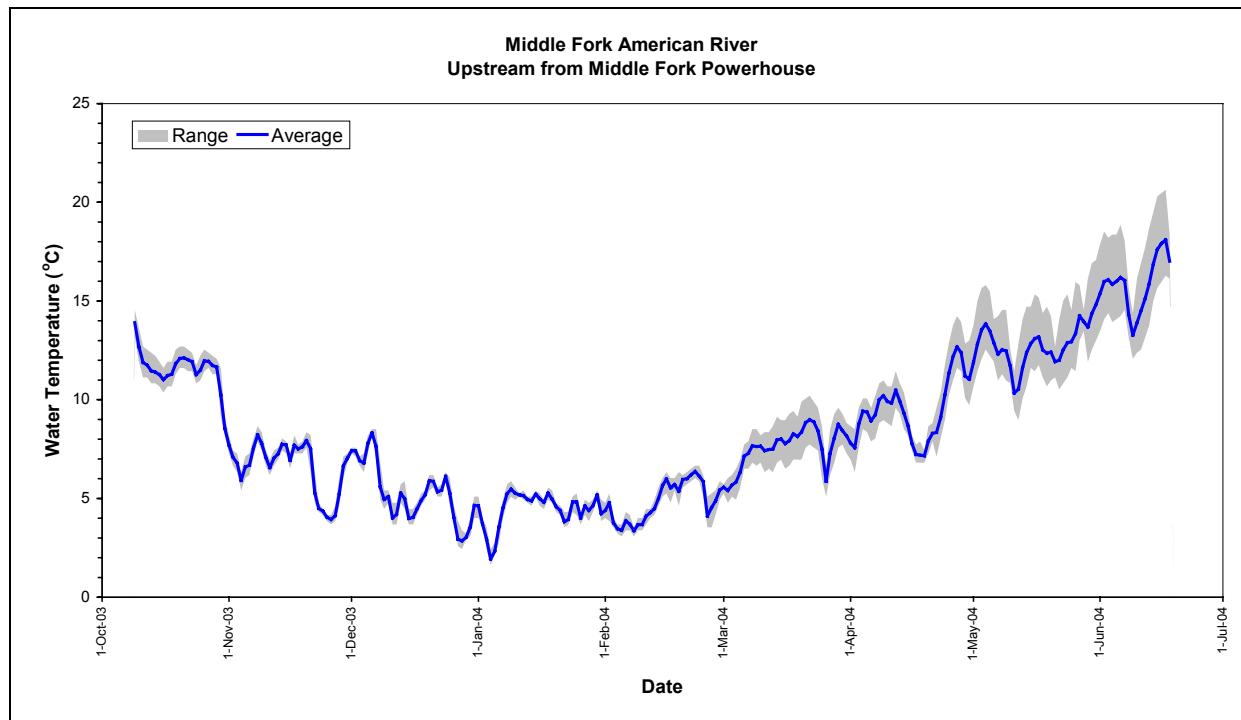


Figure A.4. Daily Average and Range of Water Temperatures from the Middle Fork American River Upstream from Middle Fork Powerplant (MF3).

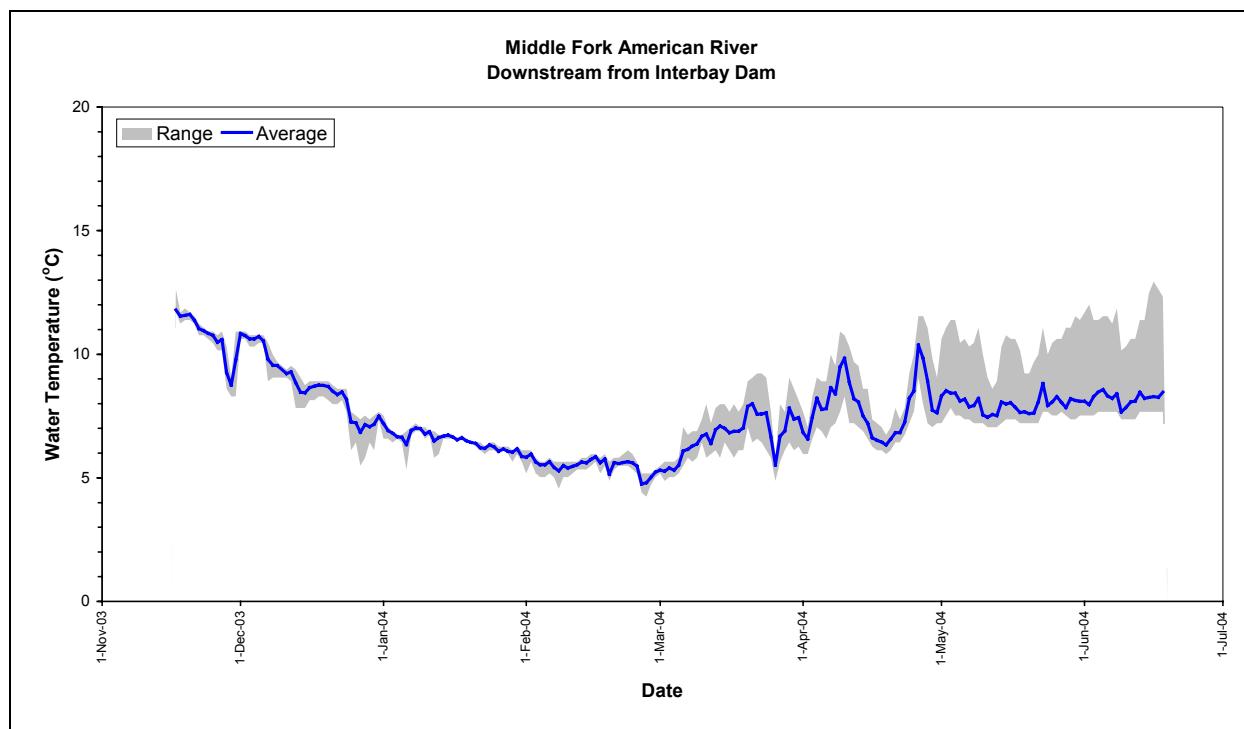


Figure A.5. Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from Middle Fork Interbay (MF4).

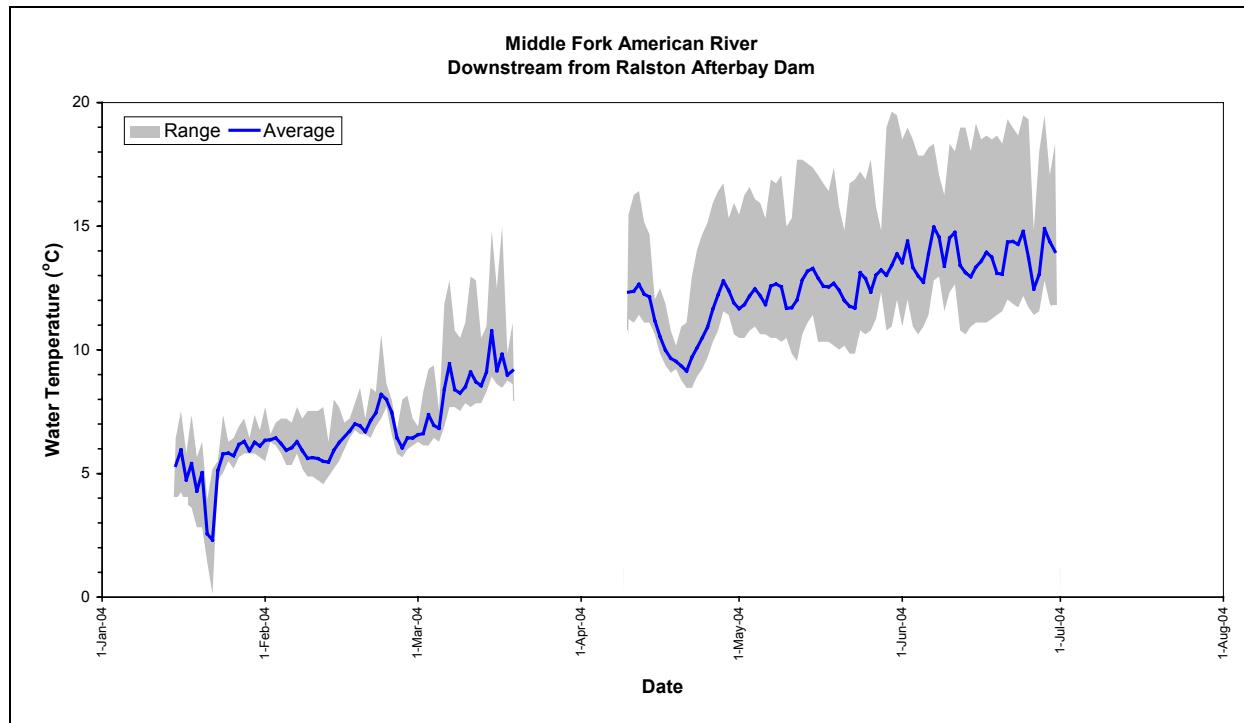


Figure A.6. Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from Ralston Afterbay Dam (MF5).

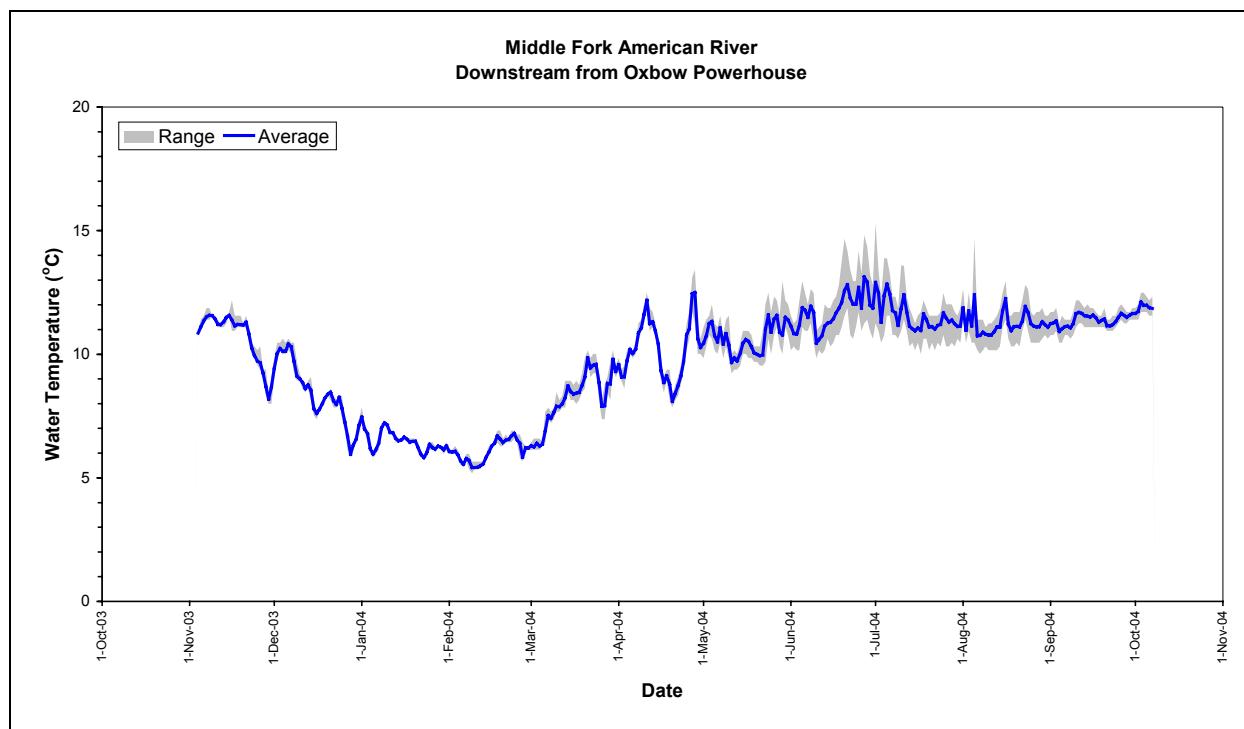


Figure A.7. Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from Oxbow Powerplant (MF6).

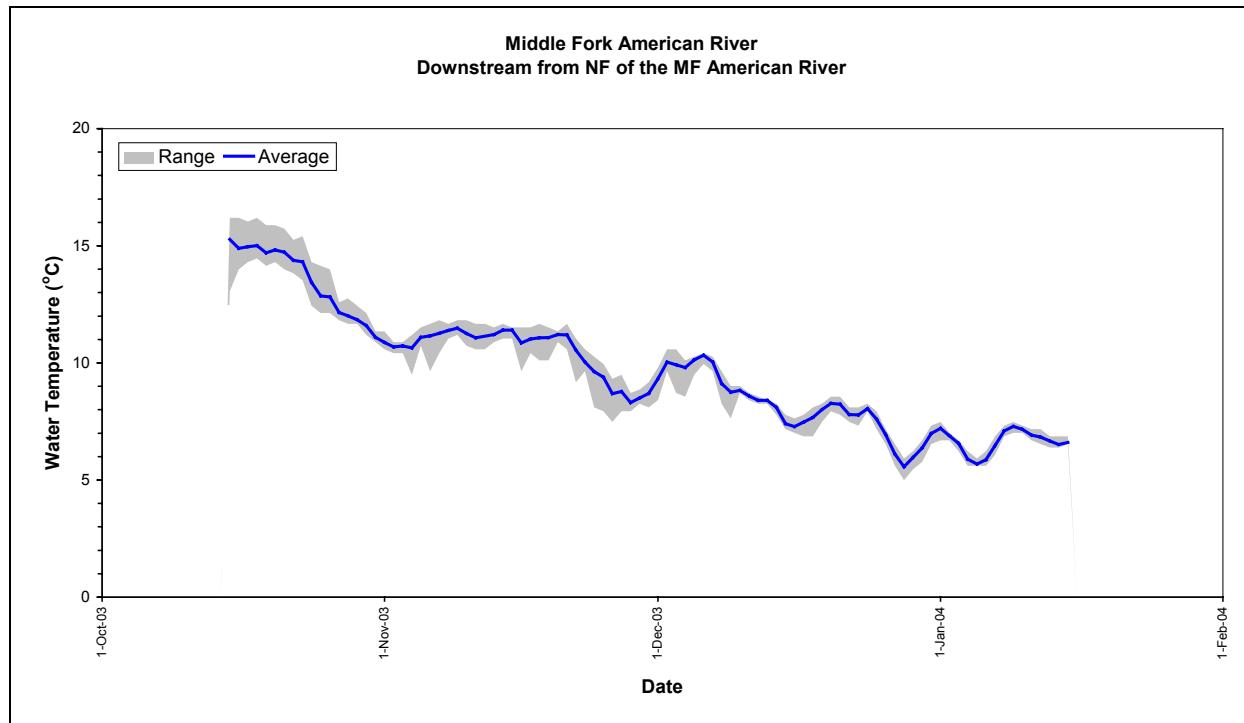


Figure A.8. Daily Average and Range of Water Temperatures in the Middle Fork American River Downstream from the North Fork of the Middle Fork American River Confluence (MF7).

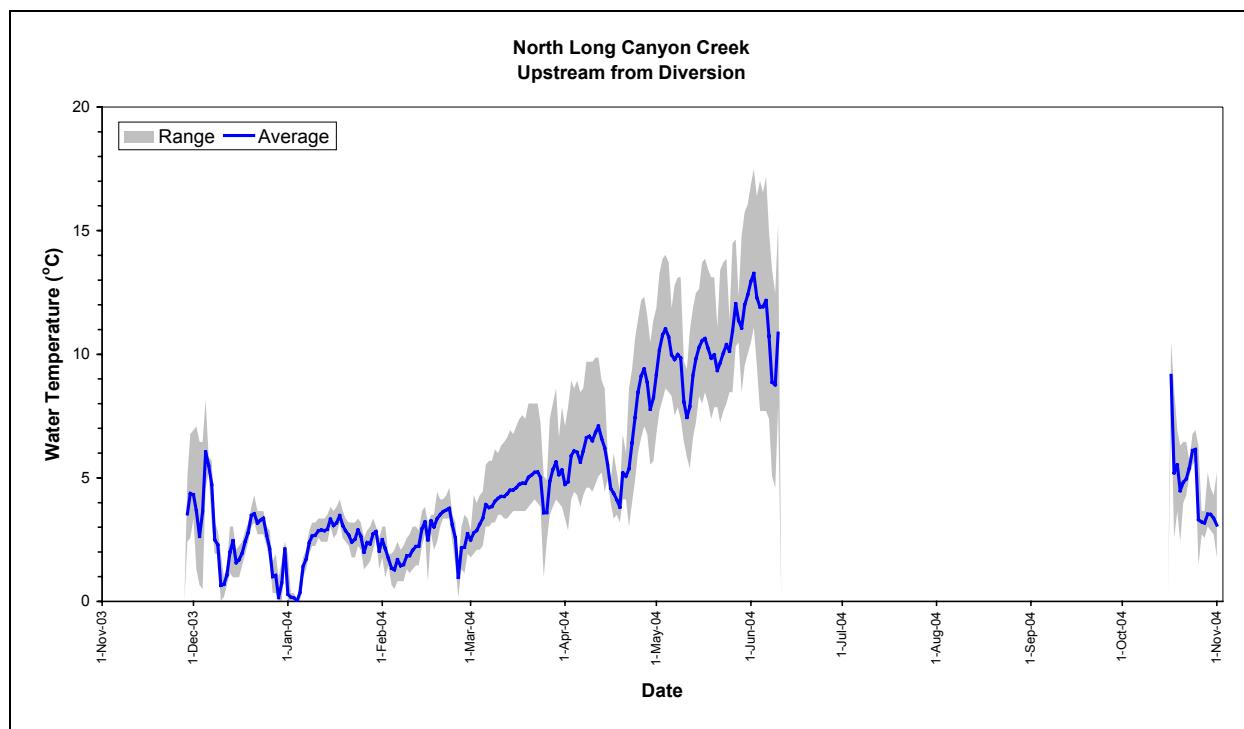


Figure A.9. Daily Average and Range of Water Temperatures in North Long Canyon Creek Upstream from North Fork Diversion Dam (NL1).

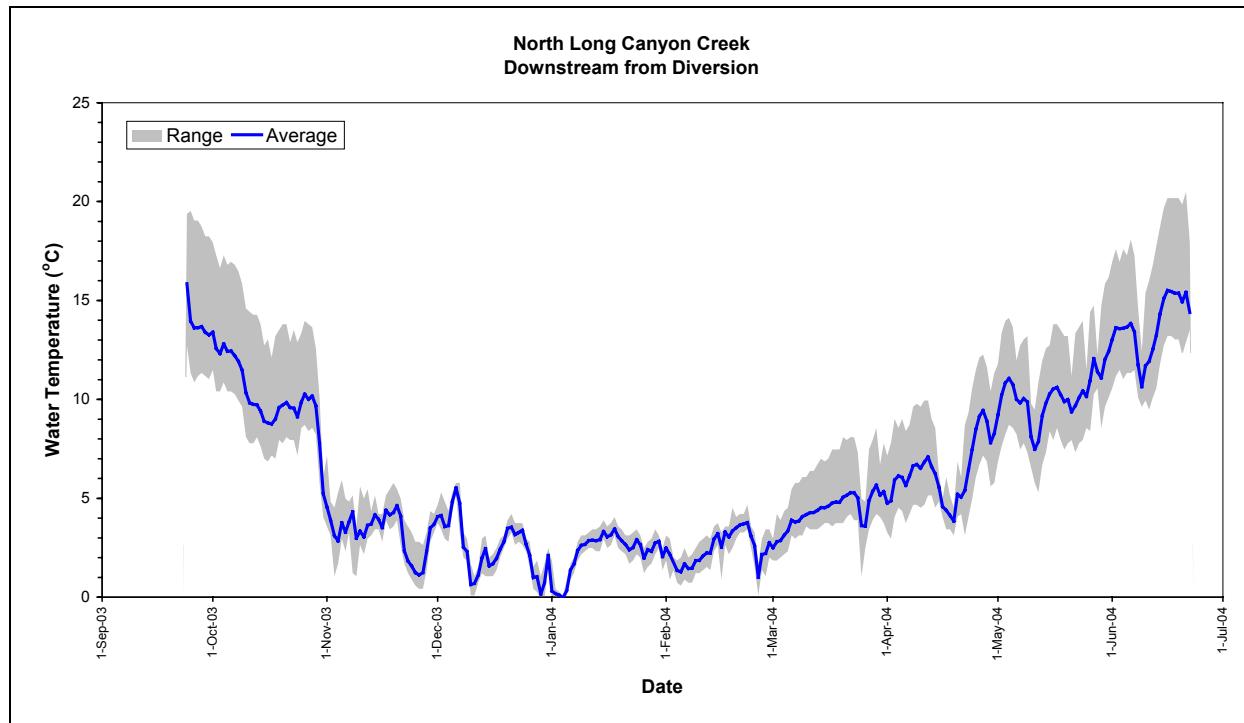


Figure A.10. Daily Average and Range of Water Temperatures in North Long Canyon Creek Downstream from North Fork Diversion Dam (NL2).

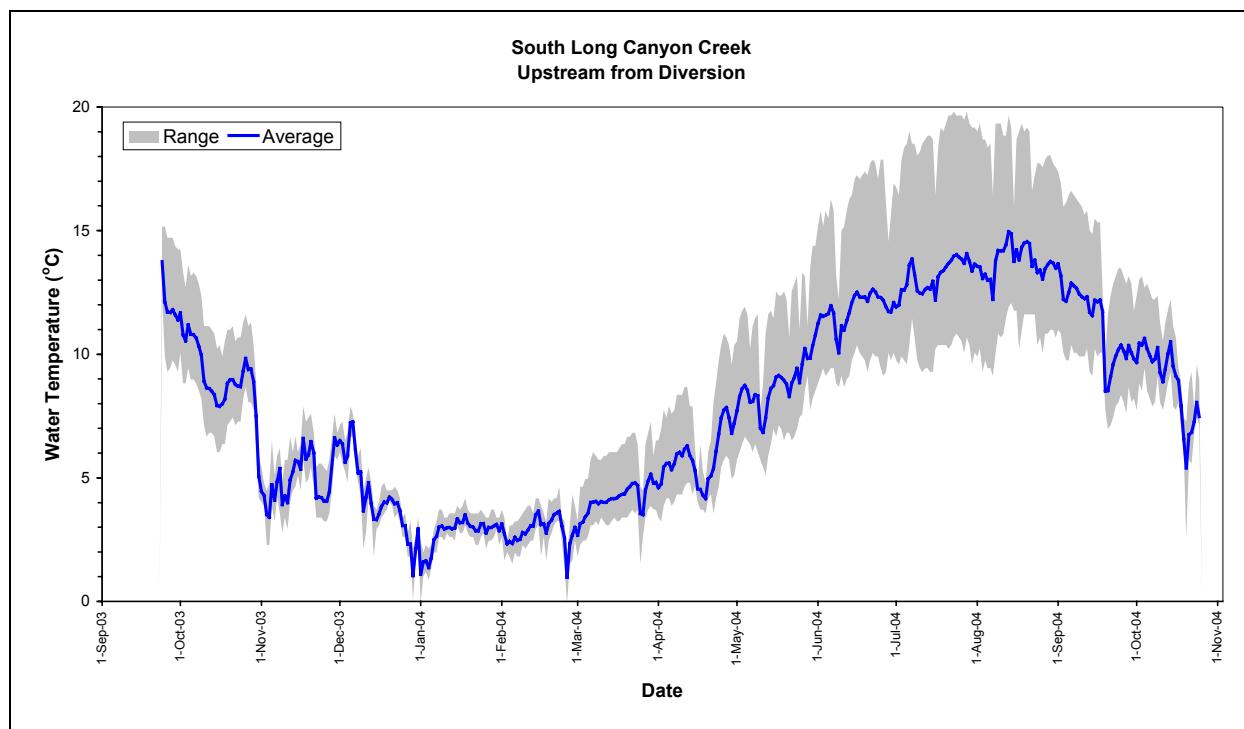


Figure A.11. Daily Average and Range of Water Temperatures in South Long Canyon Creek Upstream from South Fork Diversion Dam (SL1).

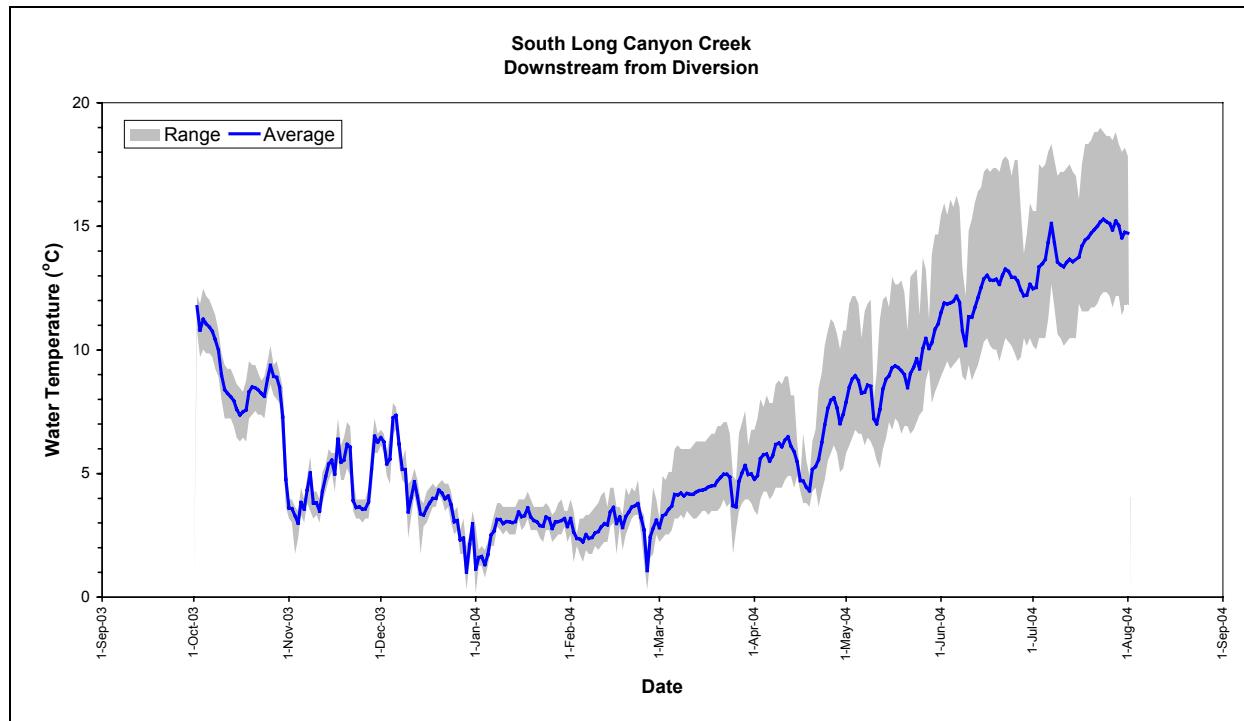


Figure A.12. Daily Average and Range of Water Temperatures in South Long Canyon Creek Downstream from South Fork Diversion Dam (SL2).

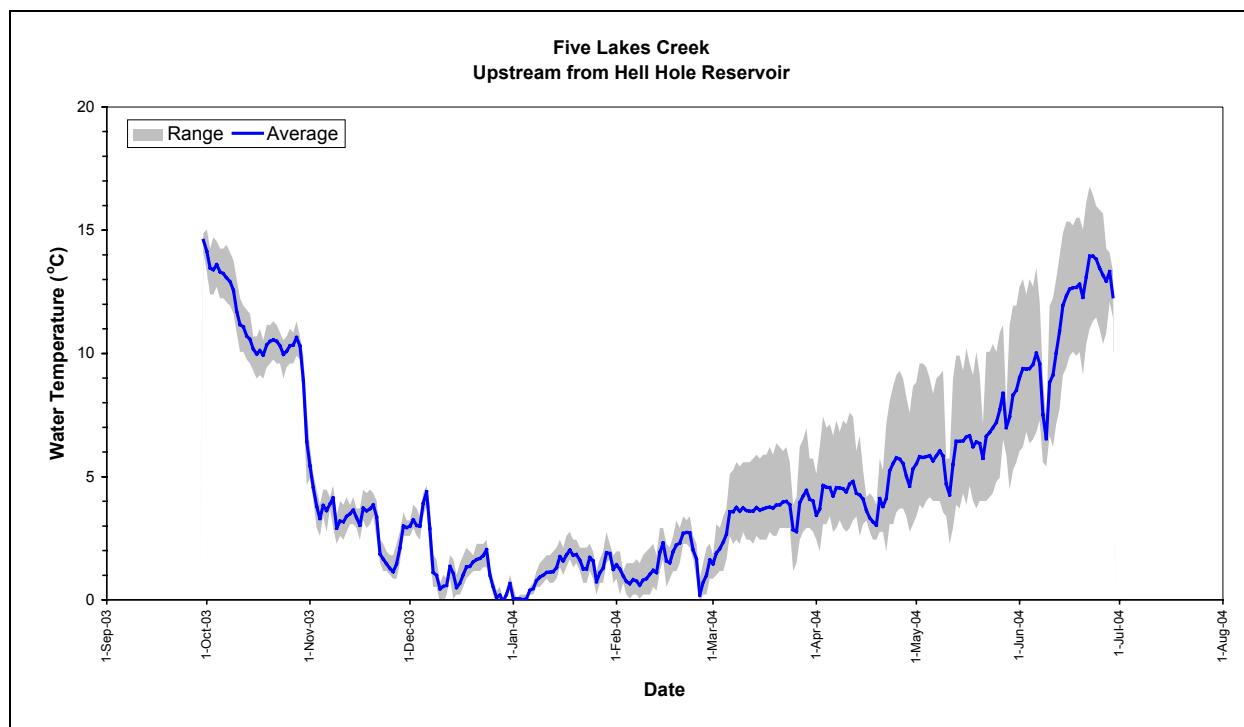


Figure A.13. Daily Average and Range of Water Temperatures in Five Lakes Creek Upstream from Hell Hole Reservoir (FL1).

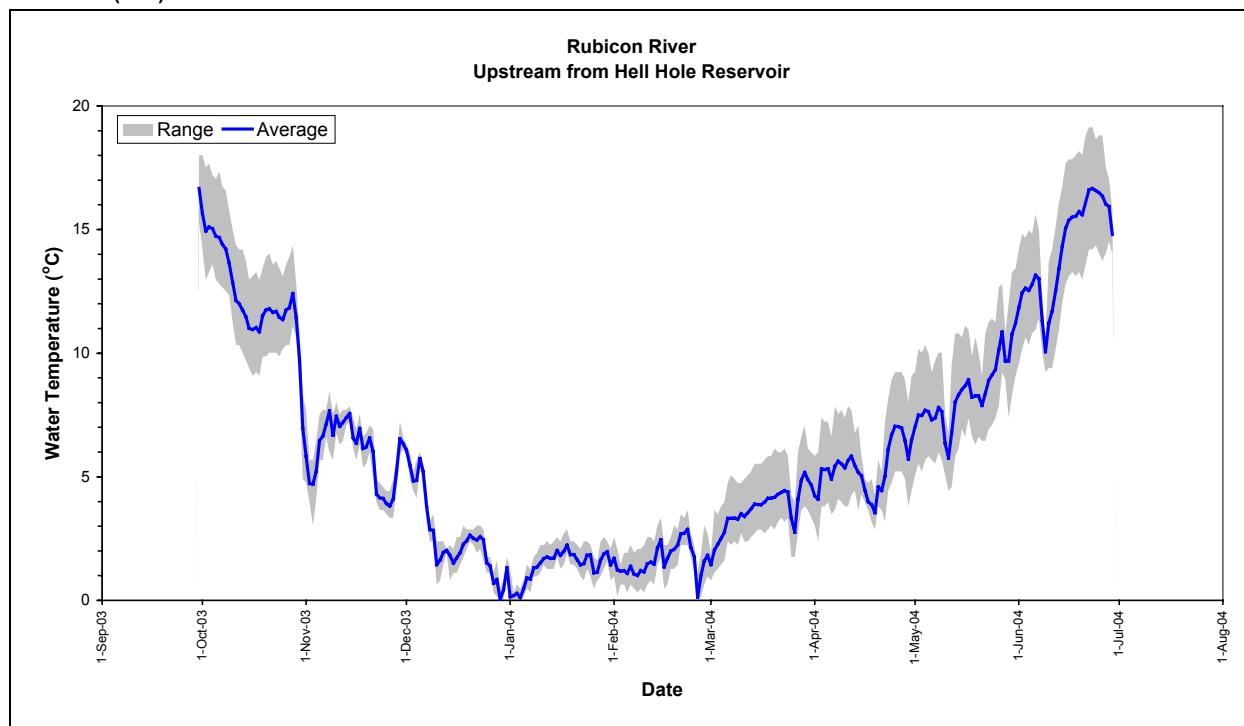


Figure A.14. Daily Average and Range of Water Temperatures in the Rubicon River Upstream from Hell Hole Reservoir (RR1).

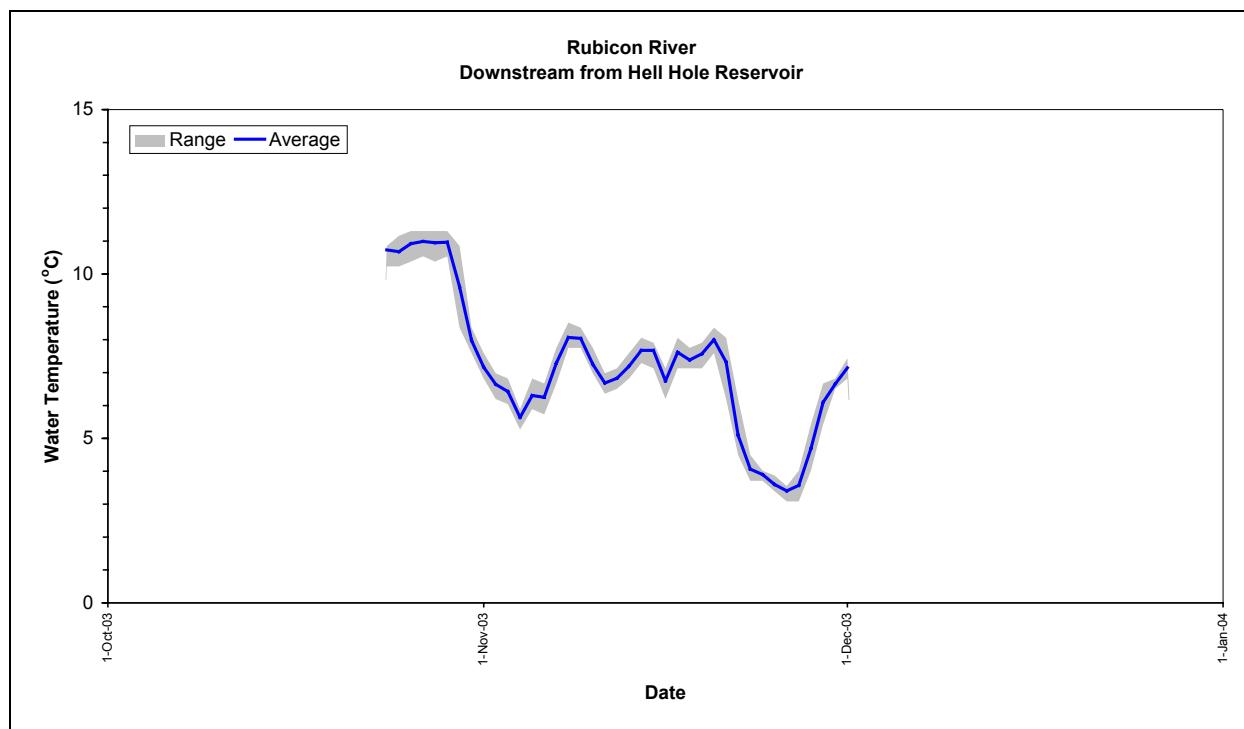


Figure A.15. Daily Average and Range of Water Temperatures in the Rubicon River Downstream from Hell Hole Reservoir (RR2).

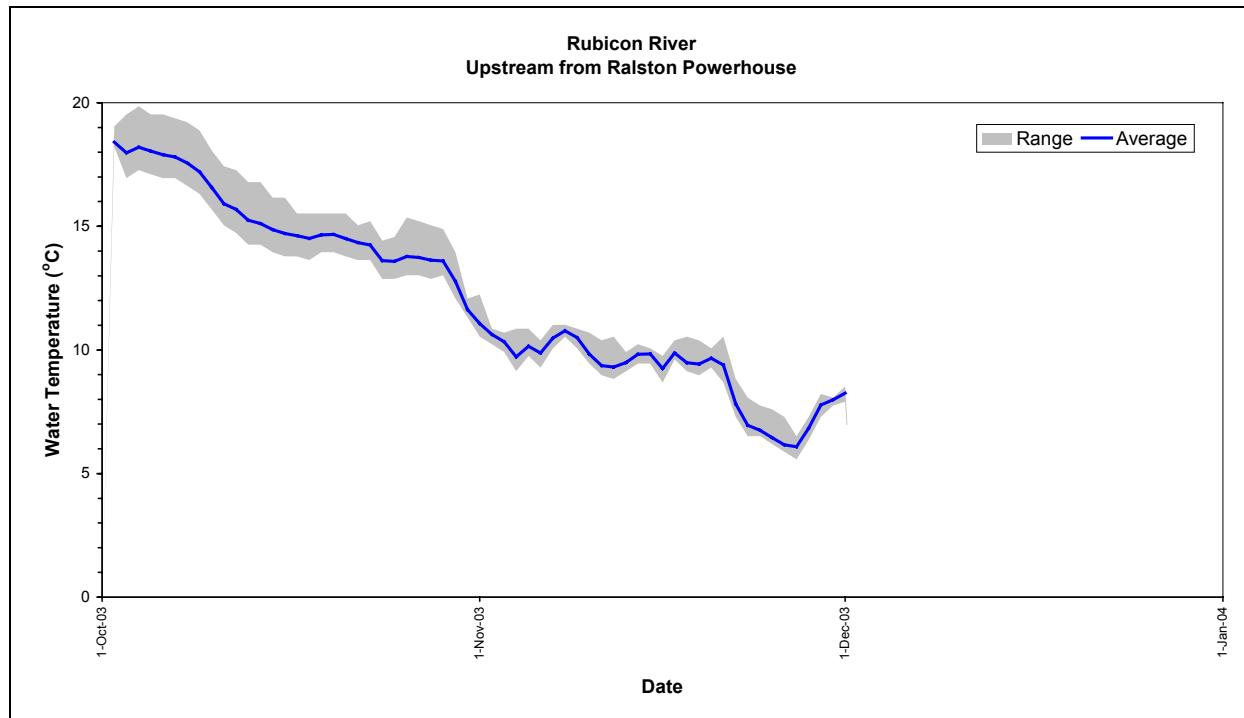


Figure A.16. Daily Average and Range of Water Temperatures in the Rubicon River Upstream from Ralston Powerplant (RR4).

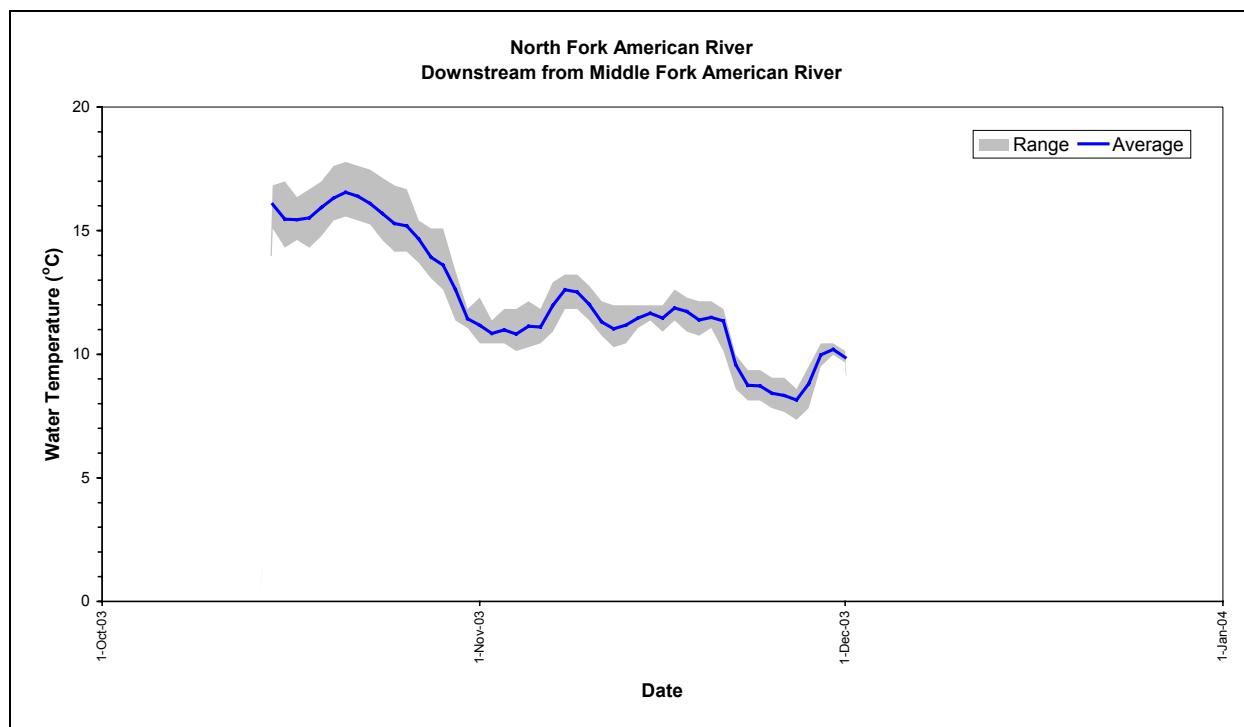


Figure A.17. Daily Average and Range of Water Temperatures from North Fork American River Downstream from the Middle Fork American River Confluence (NF2).

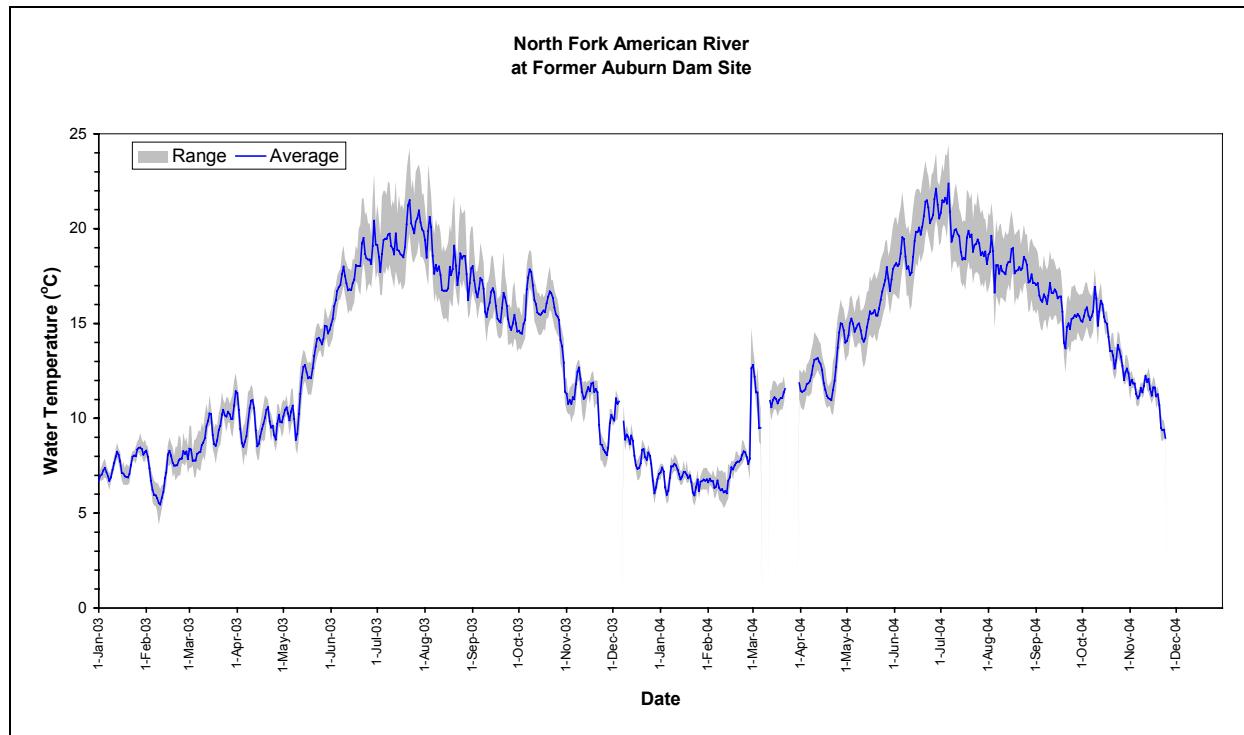


Figure A.18. Daily Average and Range of Water Temperatures from North Fork American River at the Former Auburn Dam Site.

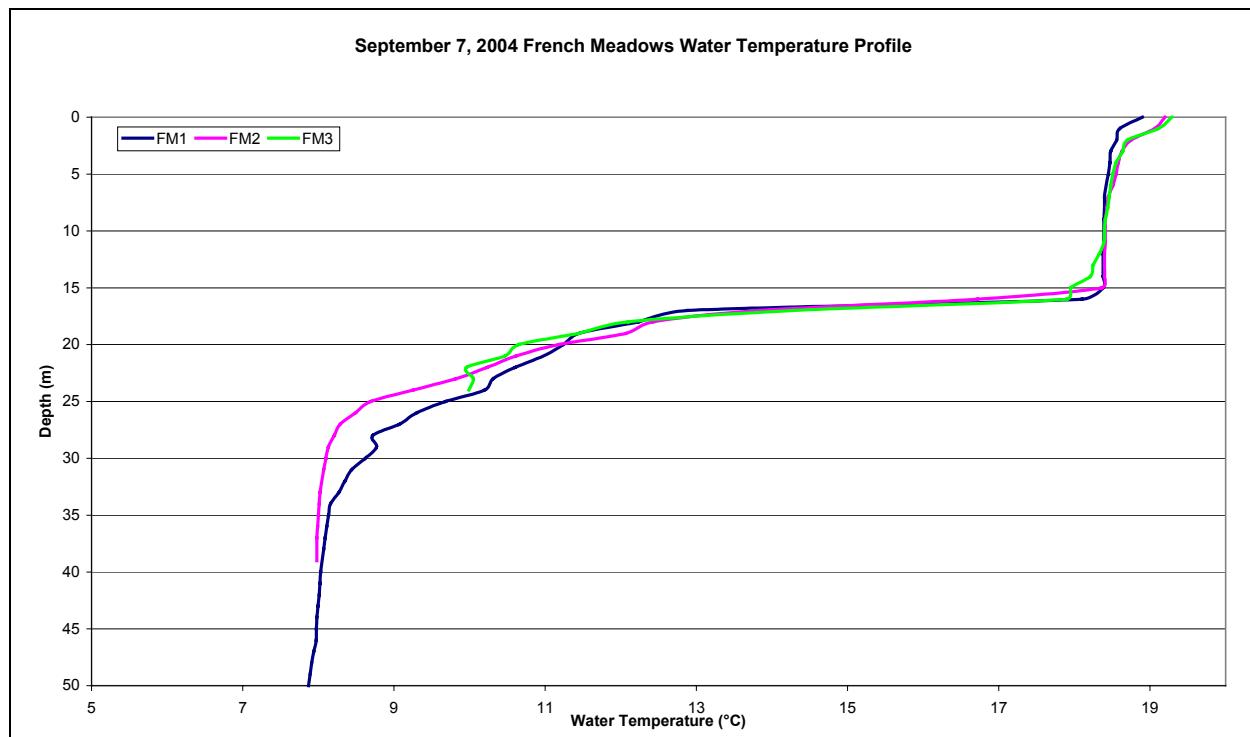


Figure A.19. French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on September 7, 2004.

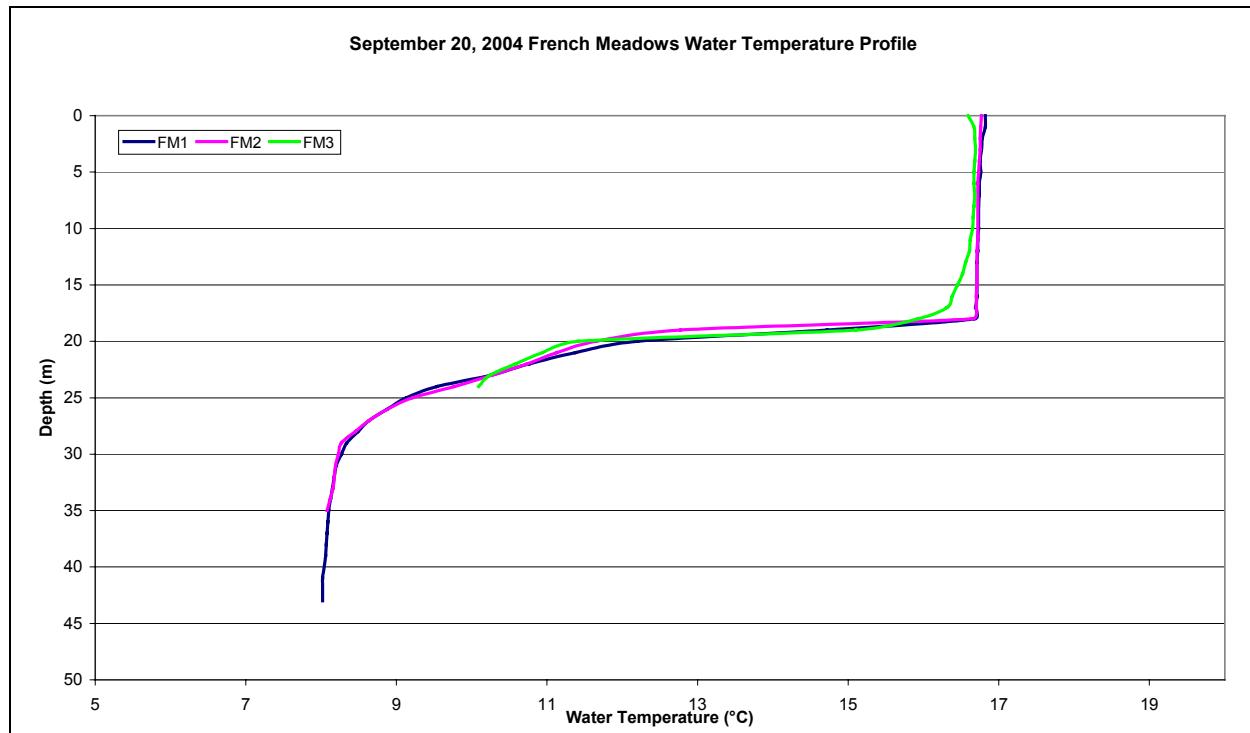


Figure A.20. French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on September 20, 2004.

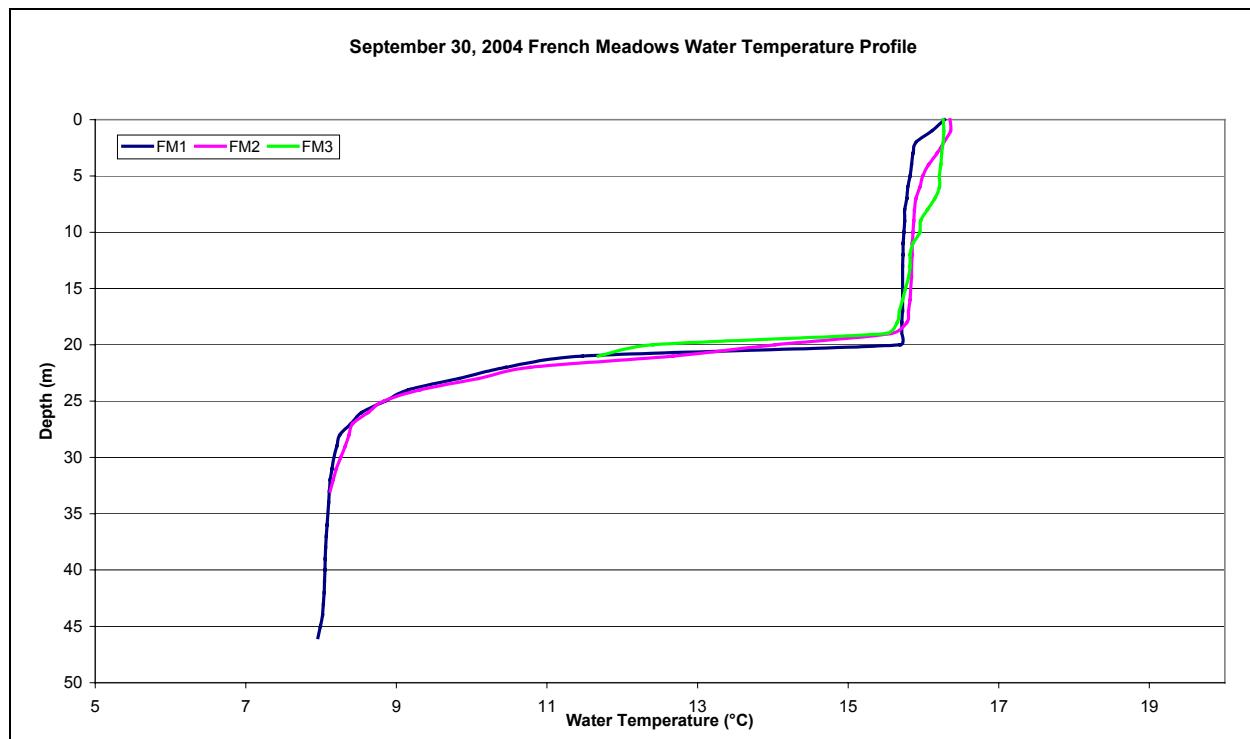


Figure A.21. French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on September 30, 2004.

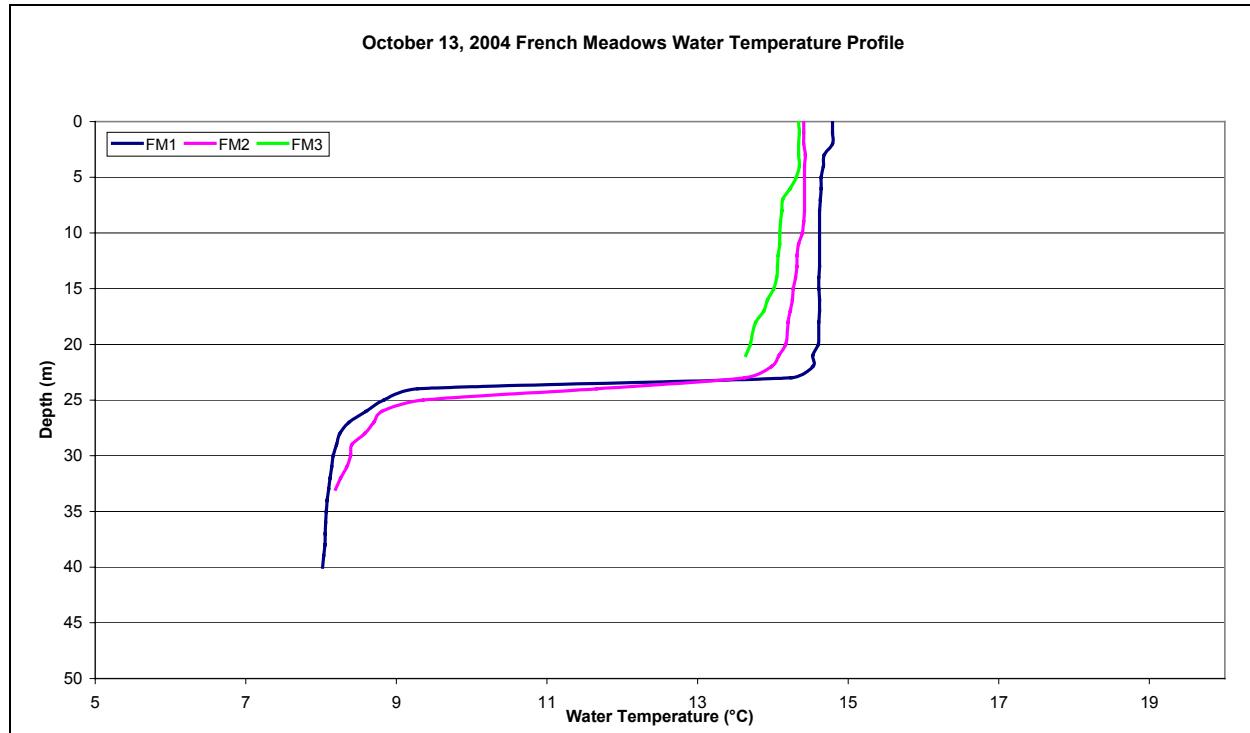


Figure A.22. French Meadows Reservoir Water Temperature Profiles of Sites FM1, FM2 and FM3 on October 13, 2004.

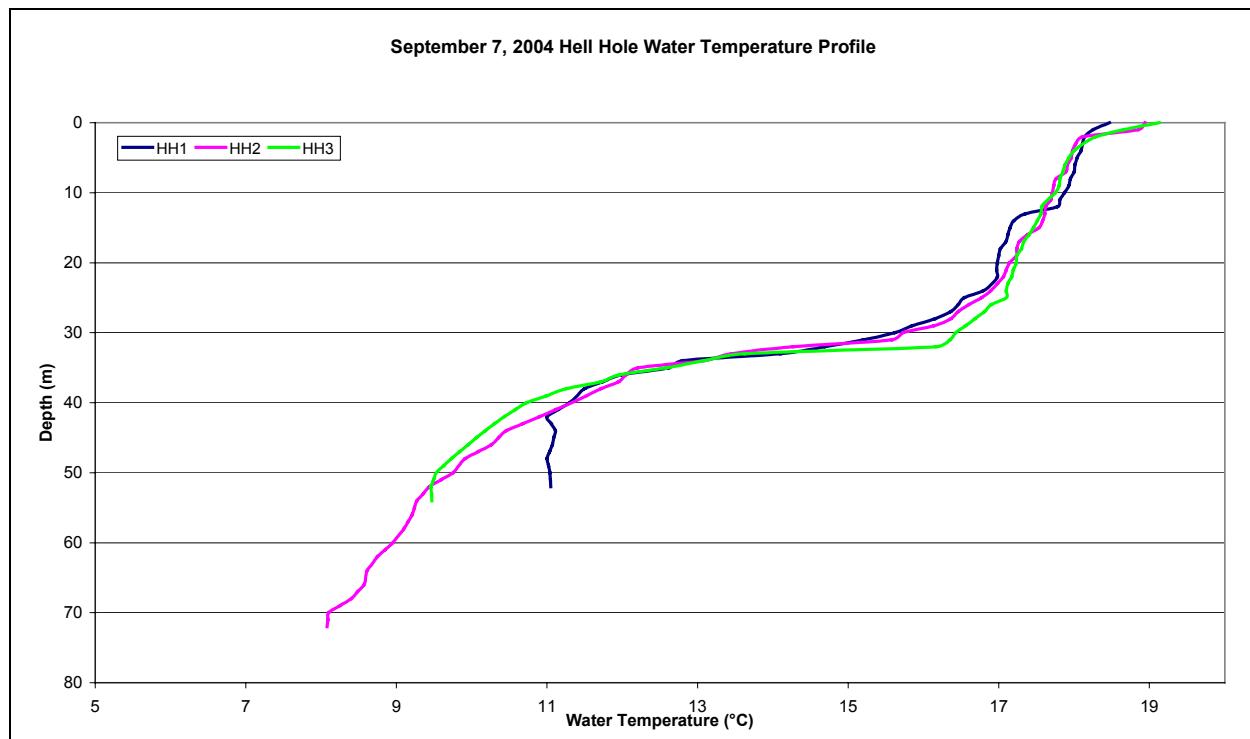


Figure A.23. Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on September 7, 2004.

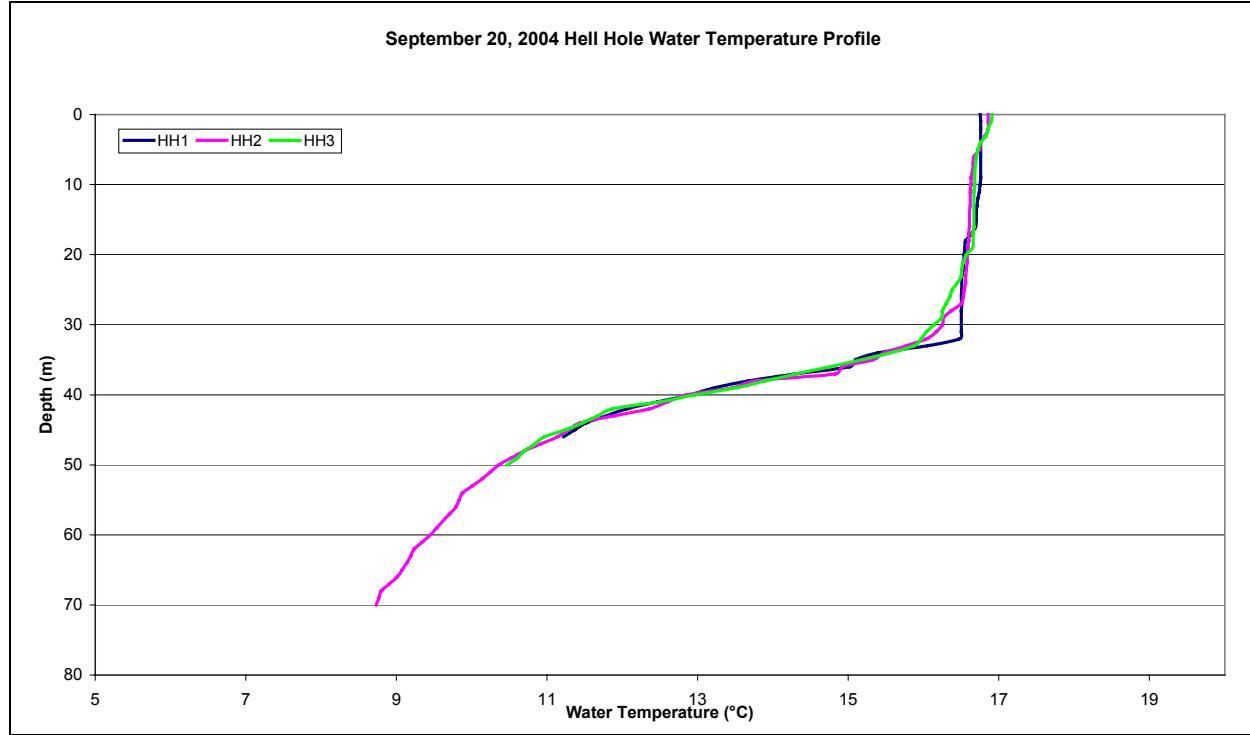


Figure A.24. Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on September 20, 2004.

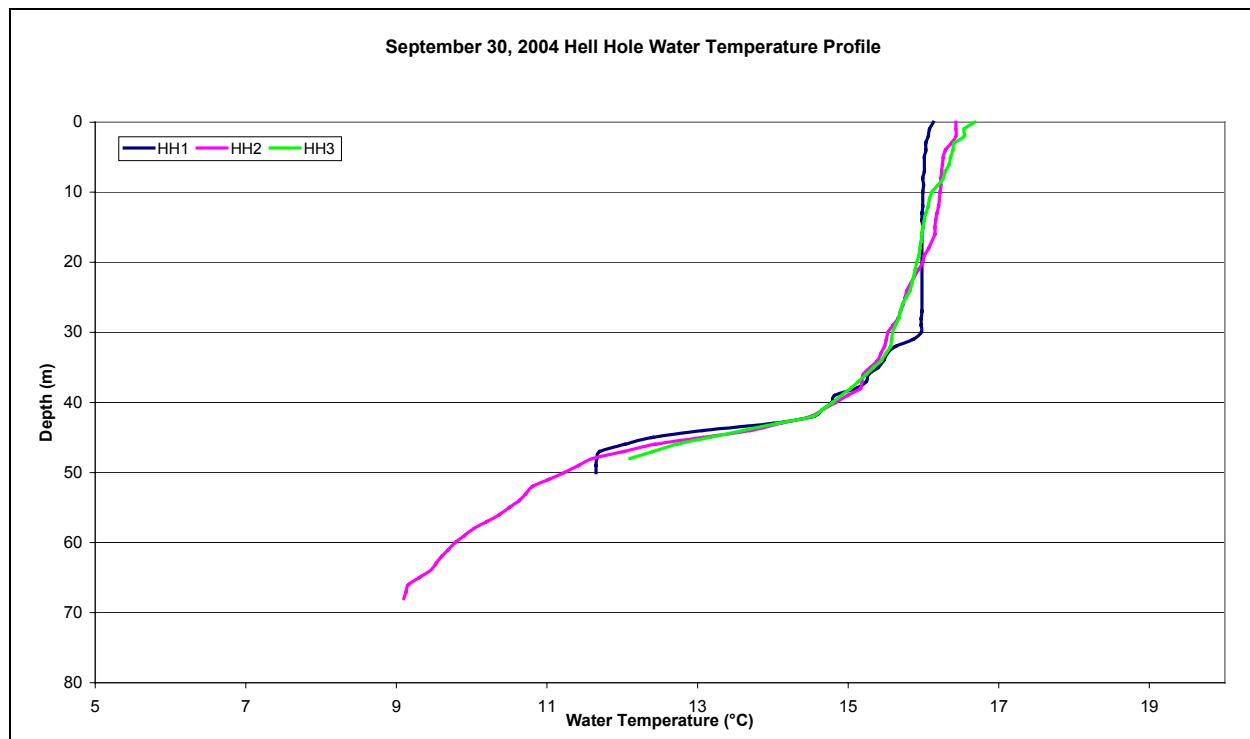


Figure A.25. Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on September 30, 2004.

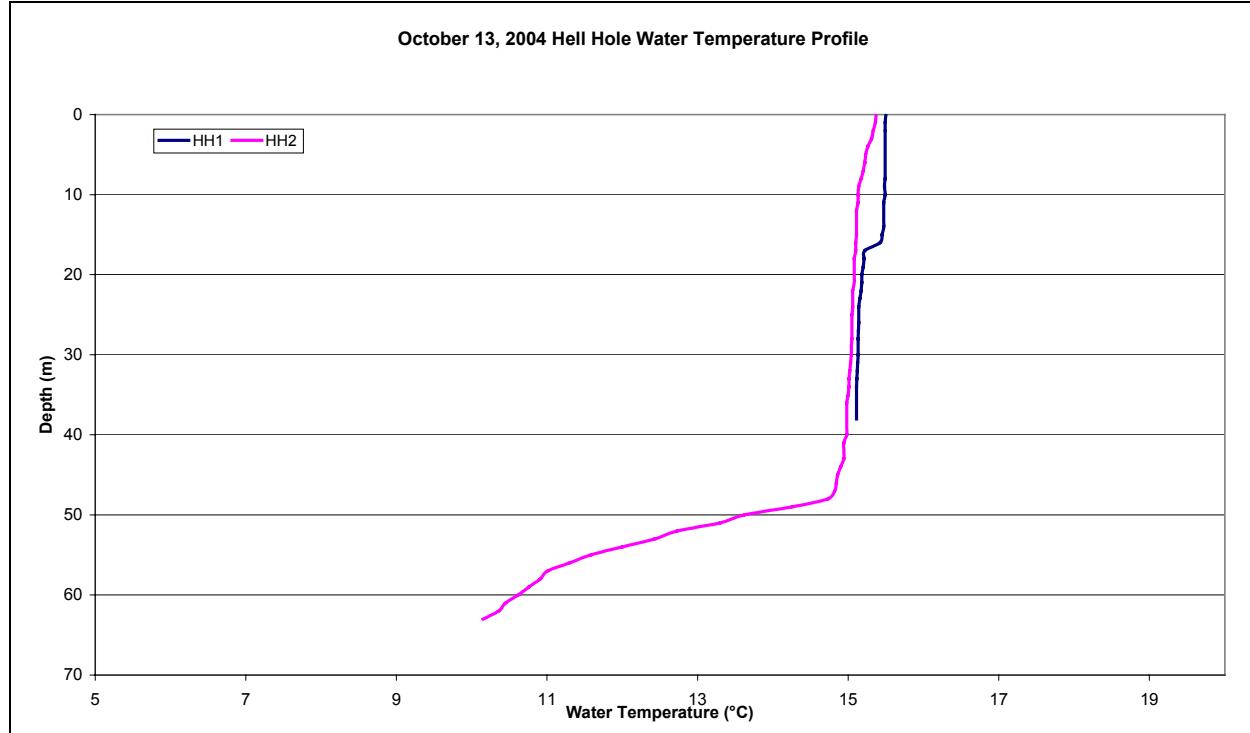


Figure A.26. Hell Hole Reservoir Water Temperature Profiles of Sites HH1, HH2 and HH3 on October 13, 2004.

Placeholder for Appendix C.

Appendix C: Map Showing the Location of Flow Gages, Temperature Monitoring Stations and Hydrologic Modeling Nodes.

Non-Internet Public Information

These Figures have been removed in accordance with the Commission regulations at 18 CFR Section 388.112.

These Figures are considered Non-Internet Public information and should not be posted on the Internet. This information may be accessed from the Placer County Water Agency's (PCWA) Public Reference Room, but is not expected to be posted on PCWA's Website, except as an indexed item.